



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number : **0 686 970 A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **95303932.8**

(51) Int. Cl.⁶ : **G11B 11/10**

(22) Date of filing : **08.06.95**

(30) Priority : **10.06.94 JP 128778/94**
10.06.94 JP 128779/94
10.06.94 JP 128780/94
26.08.94 JP 201979/94
26.08.94 JP 201980/94
30.09.94 JP 236209/94
24.10.94 JP 258002/94

(43) Date of publication of application :
13.12.95 Bulletin 95/50

(84) Designated Contracting States :
DE FR GB IT NL

(71) Applicant : **CANON KABUSHIKI KAISHA**
30-2, 3-chome, Shimomaruko,
Ohta-ku
Tokyo (JP)

(72) Inventor : **Nishimura, Naoki, c/o Canon K.K.**
30-2, 3-chome Shimomaruko
Ohta-ku, Tokyo (JP)
Inventor : **Hiroki, Tomoyuki, c/o Canon K.K.**
30-2, 3-chome Shimomaruko
Ohta-ku, Tokyo (JP)
Inventor : **Okada, Takeshi, c/o Canon K.K.**
30-2, 3-chome Shimomaruko
Ohta-ku, Tokyo (JP)

(74) Representative : **Beresford, Kelth Denis Lewis**
et al
BERESFORD & Co.
2-5 Warwick Court
High Holborn
London WC1R 5DJ (GB)

(54) **Magneto-optical recording medium and reproducing method using the medium**

(57) In a magneto-optical recording medium, a first magnetic layer for participating in reproduction of information is laminated on a substrate. A second magnetic layer for storing information is laminated on the first magnetic layer. A third magnetic layer having a Curie temperature lower than those of the first and second magnetic layers is disposed between the first magnetic layer and the second magnetic layer. A magnetization of a region of the first magnetic layer adjacent to a region of the third magnetic layer the temperature of which is above the Curie temperature of the third magnetic layer is aligned with the direction of magnetization of a region around the region of the first magnetic layer.

FIG. 5A




FIG. 5B





FIG. 5C



EP 0 686 970 A2

The present invention relates to a magneto-optical recording medium, wherein information is recorded and reproduced using a laser beam, and more specifically, to a magneto-optical recording medium and a magneto-optical reproducing method, which are capable of realizing high-density recording and super-resolution reproduction.

As a high-density recording system which is rewritable, a magneto-optical recording system has been receiving a lot of attention, wherein information is recorded by writing magnetic domains in a magnetic thin film using thermal energy of a semiconductor laser beam, and the recorded information is read out using a magneto-optical effect. In recent years, the demand has been increasing to enhance the recording density of this magneto-optical recording medium for further increasing its storage volume.

A line recording density of an optical disc, such as, the magneto-optical recording medium, largely depends on a laser beam wavelength λ in the reproducing optical system and the number NA of apertures of an objective lens. Specifically, since a diameter of a beam waist is determined when the reproducing light wavelength and the objective lens aperture number are determined, the shortest mark length which can be reproduced is limited by about $\lambda/2NA$.

On the other hand, a track density is mainly limited by crosstalk between adjacent tracks and depends on the diameter of the reproducing beam spot like the shortest mark length.

Accordingly, in order to realize the higher-density recording with the conventional optical disc, it is necessary to shorten the laser beam wavelength in the reproducing optical system or increase the number NA of apertures of the objective lens. However, it is not easy to shorten the laser beam wavelength in view of efficiency of the element, generation of heat and the like. On the other hand, when increasing the number of apertures of the objective lens, the processing of the lens becomes difficult, and further, a distance between the lens and the disc becomes so short that a mechanical problem, such as, collision with the disc, is generated. In view of this, techniques have been developed to improve a structure of the recording medium and information reading method so as to increase the recording density.

For example, in a magneto-optical reproducing method as disclosed in Japanese Patent Application Laid-open No. 3-93056, a medium structure as shown in Figs. 1A to 1C has been proposed. Fig. 1A is a sectional view of an optical disc as an example of the super-resolution technique. A substrate 20 is normally formed of a transparent material, such as, glass or polycarbonate. On the substrate 20, an interference layer 34, a reproduction layer 31, an intermediate layer 32, a memory layer 33 and a protective layer 35 are laminated in the order named. The interference layer 34 is provided for enhancing the Kerr effect, and the protective layer 35 is provided for protecting the magnetic layers. Arrows in the magnetic layers each represent a direction of magnetization or atomic magnetic moment in the magnetic film. A light spot is irradiated onto the medium having the reproduction layer, the intermediate layer and the memory layer to form a temperature distribution on the medium. In the temperature distribution, a magnetic coupling between the reproduction layer and the memory layer at a high-temperature region is cut off by the intermediate layer having a low Curie temperature, and magnetization of the reproduction layer at the portion where the magnetic coupling was cut off, is aligned in one direction by an external magnetic field, so as to mask a portion of magnetic-domain information of the memory layer within the light spot. In this manner, a signal having a period equal to or smaller than the diffraction limit of light can be reproduced so as to improve the line recording density.

On the other hand, in super-resolution producing methods as disclosed in Japanese Patent Application Laid-open Nos. 3-93058 and 4-255946, a medium formed of a reproduction layer 31, an intermediate layer 32 and a memory layer 33 is used as shown in Figs. 2A to 2C. Prior to reproducing information, magnetization of the reproduction layer 31 is aligned in one direction by an initializing magnetic field 21 so as to mask magnetic-domain information of the memory layer 33. Thereafter, a light spot 2 is irradiated to form a temperature distribution on the medium. In the temperature distribution, the initialized state of the reproduction layer 31 is held in a low-temperature region to form a front mask 4. On the other hand, in a high-temperature region where a temperature is equal to or higher than a Curie temperature T_{c2} of the intermediate layer 32, magnetization of the reproduction layer 31 is forcibly oriented in a direction of a reproducing magnetic field 22 so as to form a rear mask 5. Only in a medium-temperature region, the magnetic-domain information of the memory layer 33 is transferred so as to reduce an effective size of the reproducing light spot. By this arrangement, a recorded mark 1 equal to or smaller than the diffraction limit of light can be reproduced so as to improve the line recording density.

On the other hand, in Japanese Patent Application Laid-open No. 6-124500, a magneto-optical recording medium structure has been proposed, as shown in Figs. 3A to 3C, for providing a super-resolution technique to realize the recording density exceeding the optical resolution of the reproduced signal.

Fig. 3A is a sectional view of an optical disc as an example of the super-resolution technique. Arrows in the magnetic films each represent a direction of iron family element sublattice magnetization in the film.

The memory layer 42 is a film formed of a material, such as, TbFeCo, DyFeCo or the like, having a large

perpendicular magnetic anisotropy. Information is held in the memory layer 42 in the form of magnetic domains which are directed upward or downward relative to a film surface. The reproduction layer 41 is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film when increased in temperature to T_I-mask.

When information reproducing light is irradiated onto the disc having the foregoing medium structure from a side of the substrate 20, a temperature gradient at the center of the data track becomes as shown in Fig. 3C. When seeing this from the side of the substrate 20, an isotherm of T_I-mask exists in the light spot as shown in Fig. 3B. As described above, since the reproduction layer 41 is an in-plane magnetization film at a temperature lower than T_I-mask, it does not contribute to the Kerr effect (forming the front mask 4) at that portion so that the recorded magnetic domain held in the memory 42 is masked by the front mask 4. On the other hand, at a portion where a temperature is no less than T_I-mask, the reproduction layer 41 becomes a perpendicular magnetization film, and further, a direction of the magnetization becomes the same as the recorded information due to the exchange-coupling force from the memory layer 42. As a result, the recorded magnetic domain of the memory layer 42 is transferred only to an aperture portion 3 which is smaller than a size of the spot 2 so that the super resolution is realized.

In the foregoing known super-resolution techniques, since the front mask 4 at the low-temperature region extends toward the adjacent tracks, those techniques aim to also improve the track density along with the line recording density.

However, in the method disclosed in Japanese Patent Application Laid-open No. 3-93056, although the resolution can be enhanced without reducing signal equality, it is necessary to apply the reproducing magnetic field. Further, in the methods disclosed in Japanese Patent Application Laid-opens Nos. 3-93058 and 4-255946, it is necessary to align the magnetization of the reproduction layer 31 in one direction prior to reproducing information so that an initializing magnet 21 for that purpose should be added to the conventional device. Further, in the super-resolution reproducing method disclosed in Japanese Patent Application Laid-open No. 6-124500, since only the front mask 4 is used, when expanding the mask region for enhancing the resolution, a position of the aperture 3 deviates from the center of the spot to deteriorate signal equality.

As described above, the conventional super-resolution reproducing methods include problems such that the resolution can not be increased to a sufficient level, the magneto-optical recording/reproduction apparatus is complicated in structure, highly-cost, difficult in size reduction and the like.

The present invention has been made to at least alleviate the above-mentioned problems, and has as its object to provide a magneto-optical recording medium and a magneto-optical information reproducing method using the medium, which can reproduce a recorded mark equal to or smaller than the diffraction limit of light in high signal equality with a simple structure which does not require either an initializing magnetic field or a reproducing magnetic field upon reproduction.

In order to achieve the above object, there is provided a magneto-optical recording medium comprising:

- a substrate;
- a first magnetic layer laminated on the substrate for reproducing information;
- a second magnetic layer laminated on the first magnetic layer for storing the information; and
- a third magnetic layer disposed between the first and second magnetic layers and having a Curie temperature lower than Curie temperatures of the first and second magnetic layers,

wherein a direction of magnetization of a region of the first magnetic layer, the region being adjacent to a region of the third magnetic layer where a temperature is equal to or higher than the Curie temperature of the third magnetic layer, is oriented in a direction of magnetization around the region of the first magnetic layer.

In order to achieve the above object, there is also provided an information reproducing method for reproducing information stored in a magneto-optical recording medium including:

- a substrate;
- a first magnetic layer laminated on the substrate for reproducing the information;
- a second magnetic layer laminated on the first magnetic layer for storing the information; and
- a third magnetic layer disposed between the first and second magnetic layers and having a Curie temperature lower than Curie temperatures of the first and second magnetic layers,

wherein a direction of magnetization of a region of the first magnetic layer, the region being adjacent to a region of the third magnetic layer where a temperature is equal to or higher than the Curie temperature of the third magnetic layer, is oriented in a direction of magnetization around the region of the first magnetic layer,

the information reproducing method comprising the steps of:

- irradiating a light spot;
- increasing, in temperature, the third magnetic layer to near its Curie temperature in a high-temperature

region within the light spot so as to orient the direction of magnetization, in the high-temperature region, of the first magnetic layer in the direction of magnetization of the first magnetic layer around the high-temperature region;

transferring the information stored in the second magnetic layer to the first magnetic layer at least at a medium-temperature region within said light spot; and

reproducing the information by detecting a magneto-optical effect of reflected light of said light spot.

A number of embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figs. 1A to 1C, 2A to 2C and 3A to 3C are diagrams showing conventional super-resolution methods, respectively;

Fig. 4 is a diagram showing a basic layer structure of magnetic layers of a magneto-optical recording medium according to a first embodiment of the present invention;

Figs. 5A to 5C are diagrams showing one manner of an information reproducing method for the magneto-optical recording medium according to the first embodiment of the present invention, wherein Fig. 5A is a diagram showing an mask region and an aperture region within a light spot on an upper surface of the medium, Fig. 5B is a diagram showing a magnetization direction state of each layer, and Fig. 5C is a diagram showing a temperature distribution in a track direction;

Figs. 6A to 6C are diagrams showing another manner of the information reproducing method for the magneto-optical recording medium according to the first embodiment of the present invention, wherein Fig. 6A is a diagram showing an mask region and an aperture region within a light spot on an upper surface of the medium, Fig. 6B is a diagram showing a magnetization direction state of each layer, and Fig. 6C is a diagram showing a temperature distribution in a track direction;

Figs. 7A to 7C are diagrams for explaining a principle in which a high-temperature region in a light spot is masked in the magneto-optical recording medium according to the first embodiment of the present invention;

Fig. 8 is a diagram showing static magnetic fields H_{leak} , H_{st} and an effective magnetic field H_{wb} due to a Bloch magnetic wall energy, which are applied to a recorded magnetic domain transferred to a reproduction layer;

Fig. 9A is a diagram showing stable magnetization states for a layer structure of an anti-parallel type, wherein an exchange-coupling force and a magnetostatic coupling force are dominant, respectively;

Fig. 9B is a diagram showing stable magnetization states for a layer structure of a parallel type, wherein an exchange-coupling force and a magnetostatic coupling force are dominant, respectively;

Figs. 10A to 10C are diagrams, respectively, showing temperature dependencies of saturation magnetizations with respect to GdFeCo having different compensation temperatures;

Fig. 11 is a diagram showing a composition dependency of a compensation temperature and a Curie temperature of GdFeCo;

Fig. 12 is a diagram showing an example of a temperature characteristic of a diamagnetic field energy $2Ms^2$ and a perpendicular magnetic anisotropy constant K_u of the reproduction layer of the magneto-optical recording medium according to the first embodiment of the present invention;

Figs. 13A to 13C are diagrams showing examples of temperature characteristics of M_s of the respective magnetic layers of the magneto-optical recording medium according to the first embodiment of the present invention;

Fig. 14 is a diagram showing an example of a layer structure of the magneto-optical recording medium of the embodiment of the present invention;

Figs. 15A and 15B are diagrams showing an interface magnetic wall;

Fig. 16 is a diagram showing a temperature dependency of a saturation magnetization of a GdFeCo reproduction layer;

Fig. 17 is a diagram showing a temperature dependency of a saturation magnetization of a TbFeCo memory layer;

Fig. 18 is a diagram showing a reproduction-layer-composition- x dependency of a saturation magnetization of the reproduction layer at a Curie temperature of an intermediate layer;

Fig. 19 is a diagram showing a reproduction-layer-composition- x dependency of C/N and energy ($E_{wb} - E_{leak} - E_{st} - E_{c1}$) in Experimental Examples 7 to 10;

Fig. 20 is a diagram showing a reproduction-layer-composition- x dependency of C/N and energy ($E_{wb} - E_{leak} - E_{st} - E_{c1}$) in Experimental Examples 11 to 14;

Fig. 21 is a diagram showing a reproducing power dependency of carrier, noise, amplitude and DC level;

Fig. 22 is a diagram showing a reproducing magnetic field dependency of C/N;

Fig. 23 is a diagram showing a reproducing power dependency of crosstalk;

- Fig. 24 is a diagram showing a basic layer structure of a magneto-optical recording medium according to a second embodiment of the present invention;
- Fig. 25A is a diagram showing a mask effect due to a film thickness of the reproduction layer;
- Fig. 25B is a diagram showing an aperture effect due to a film thickness of the reproduction layer;
- 5 Fig. 26A is a diagram showing a mask effect due to a film thickness of the intermediate layer;
- Fig. 26B is a diagram showing an aperture effect due to a film thickness of the intermediate layer;
- Fig. 27 is a diagram showing a reproduction layer film-thickness dependency of C/N;
- Fig. 28 is a diagram showing a reproduction layer film-thickness dependency of crosstalk;
- Fig. 29 is a diagram showing an intermediate layer film-thickness dependency of C/N;
- 10 Fig. 30 is a diagram showing an intermediate layer film-thickness dependency of crosstalk;
- Fig. 31 is a diagram showing a basic structure of a magneto-optical recording medium according to a third embodiment of the present invention;
- Fig. 32 is a diagram showing a reproducing power dependency of carrier and noise;
- Fig. 33 is a diagram showing a mark length dependency of C/N;
- 15 Fig. 34 is a diagram showing a reproducing power dependency of crosstalk;
- Fig. 35 is a diagram showing a reproduction-layer-Gd-content dependency of C/N;
- Fig. 36 is a diagram showing a reproduction-layer-Gd-content dependency of crosstalk;
- Fig. 37 is a diagram showing an intermediate-layer-Gd-content dependency of C/N;
- Fig. 38 is a diagram showing an intermediate-layer-Gd-content dependency of crosstalk;
- 20 Fig. 39 is a diagram showing a memory-layer-Tb-content dependency of C/N;
- Fig. 40 is a diagram showing another structure of the magneto-optical recording medium of the third embodiment;
- Fig. 41 is a diagram showing a recording power dependency of carrier and noise when a magnetic field modulation recording is performed relative to the medium of the third embodiment;
- 25 Fig. 42 is a diagram showing a basic structure of a magneto-optical recording medium according to a fourth embodiment of the present invention;
- Fig. 43 is a diagram showing a reproducing power dependency of carrier and noise;
- Fig. 44 is a diagram showing a reproducing power dependency of carrier, noise, amplitude and DC level;
- Fig. 45 is a diagram showing a reproducing magnetic field dependency of C/N;
- 30 Fig. 46 is a diagram showing a mark length dependency of C/N;
- Fig. 47 is a diagram showing a reproducing power dependency of crosstalk;
- Fig. 48 is a diagram showing a relationship between C/N and a saturation magnetization of the reproduction layer;
- Fig. 49 is a diagram showing a relationship between crosstalk and a saturation magnetization of the reproduction layer;
- 35 Fig. 50 is a diagram showing a relationship between C/N and a saturation magnetization of the intermediate layer;
- Fig. 51 is a diagram showing a relationship between crosstalk and a saturation magnetization of the intermediate layer;
- 40 Fig. 52 is a diagram showing a relationship between a saturation magnetization and a compensation temperature of the reproduction layer;
- Fig. 53 is a diagram showing a relationship between a saturation magnetization and a Curie temperature of the intermediate layer;
- Fig. 54 is a diagram showing a relationship between a difference between a compensation temperature of the reproduction layer and a Curie temperature of the intermediate layer, and C/N;
- 45 Fig. 55 is a diagram showing a relationship between C/N and a saturation magnetization of the memory layer;
- Fig. 56 is a diagram showing another structure of the magneto-optical recording medium of the fourth embodiment;
- 50 Fig. 57 is a diagram showing a recording power dependency of carrier and noise when a magnetic field modulation recording is performed relative to the medium of the fourth embodiment;
- Fig. 58 is a diagram showing a basic layer structure of magnetic layers of a magneto-optical recording medium according to a fifth embodiment of the present invention;
- 55 Figs. 59A to 59C are diagrams showing one manner of an information reproducing method for the magneto-optical recording medium according to the fifth embodiment of the present invention, wherein Fig. 59A is a diagram showing an mask region and an aperture region within a light spot on an upper surface of the medium, Fig. 59B is a diagram showing a magnetization direction state of each layer, and Fig. 59C is a diagram showing a temperature distribution in a track direction;

Figs. 60A to 60C are diagrams showing another manner of an information reproducing method for the magneto-optical recording medium according to the fifth embodiment of the present invention, wherein Fig. 60A is a diagram showing an mask region and an aperture region within a light spot on an upper surface of the medium, Fig. 60B is a diagram showing a magnetization direction state of each layer, and Fig. 60C is a diagram showing a temperature distribution in a track direction;

Fig. 61 is a diagram showing one example of a layer structure of the magneto-optical recording medium according to the fifth embodiment of the present invention;

Fig. 62 is a diagram showing another example of a layer structure of the magneto-optical recording medium according to the fifth embodiment of the present invention;

Figs. 63A and 63B are diagrams showing a basic layer structure of magnetic layers of a magneto-optical recording medium according to a sixth embodiment of the present invention;

Figs. 64A to 64C are diagrams showing one manner of an information reproducing method for the magneto-optical recording medium according to the sixth embodiment of the present invention, wherein Fig. 64A is a diagram showing an mask region and an aperture region within a light spot on an upper surface of the medium, Fig. 64B is a diagram showing a magnetization direction state of each layer, and Fig. 64C is a diagram showing a temperature distribution in a track direction;

Figs. 65A to 65C are diagrams for explaining a principle in which a high-temperature region in a light spot is masked in the magneto-optical recording medium according to the sixth embodiment of the present invention;

Fig. 66 is a diagram showing static magnetic fields H_{leak} , H_{st} and an effective magnetic field H_{wb} due to a Bloch magnetic wall energy, which are applied to a recorded magnetic domain transferred to a reproduction layer; and

Fig. 67 is a diagram showing an example of a layer structure of the magneto-optical recording medium according to the sixth embodiment of the present invention.

(First Embodiment)

A magneto-optical recording medium according to a first embodiment of the present invention and an information reproducing method using the medium will be described in detail hereinbelow with reference to the accompanying drawings.

The magneto-optical recording medium of the present invention has, on a translucent substrate, at least three magnetic layers, that is, a first magnetic layer, a third magnetic layer having a Curie temperature lower than those of the first magnetic layer and a second magnetic layer, and the second magnetic layer being a perpendicular magnetization film, in the order named from a side of the substrate (Fig. 4). Hereinbelow, the first magnetic layer will be referred to as a reproduction layer, the second magnetic layer as a memory layer and the third magnetic layer as an intermediate layer.

The reproduction layer is a layer for reproducing magnetization information held in the memory layer. The reproduction layer is located closer to a light incident side as compared with the intermediate layer and the memory layer, and its Curie temperature is set to be higher than those of the intermediate layer and the memory layer for preventing deterioration of a Kerr rotation angle upon reproduction. Further, it is necessary that a coercive force of the reproduction layer is smaller than that of the memory layer. Preferably, the reproduction layer has a small magnetic anisotropy, and a compensation temperature between room temperature and the Curie temperature. Further, a magnetization manner of the reproduction layer is such that the reproduction layer is a perpendicular magnetization film at room temperature and between room temperature and the Curie temperature, or the reproduction layer is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film between room temperature and the Curie temperature. As a specific material of the reproduction layer, a material, for example, a rare earth-iron family amorphous alloy, such as, GdFeCo, GdTbFeCo, GdDyFeCo, NdGdFeCo or the like, mainly containing GdFeCo, is preferable since it has a high Curie temperature and a low coercive force and easily causes contraction of recorded magnetic domains in a high-temperature region, which is the prime aim of the present medium.

The intermediate layer is provided mainly for partly mediating and partly reducing or cutting off an exchange-coupling force from the memory layer to the reproduction layer. Accordingly, the intermediate layer is located between the reproduction layer and the memory layer and has a Curie temperature which is set to be higher than room temperature and lower than those of the reproduction layer and the memory layer. The Curie temperature of the intermediate layer is set to be high enough to mediate the exchange-coupling force from the memory layer to the reproduction layer at a low-temperature portion and a medium-temperature portion within a light spot, but low enough to cut off the exchange-coupling force at a highest-temperature portion within the light spot, and thus preferably, 80°C or higher and 220°C or lower, and more preferably, 110°C or higher

and 180°C or lower. When the reproduction layer has the compensation temperature between room temperature and the Curie temperature, the Curie temperature of the intermediate layer is set to a temperature within a range of, preferably, -100°C to +50°C relative to the compensation temperature, and more preferably, -80°C to +20°C relative to the compensation temperature. As a material of the intermediate layer, for example, a rare earth-iron family amorphous alloy, such as, TbFe, TbFeCo, GdFe, GdFeCo, GdTbFeCo, GdDyFeCo, DyFe, DyFeCo, TbDyFeCo or the like is preferable. A non-magnetic element, such as, Cr, Al, Si, Cu or the like may be added for lowering the Curie temperature. Further, when masking a low-temperature region by causing the reproduction layer to be an in-plane magnetization film at a low temperature, it is preferable that an in-plane magnetic anisotropy of the intermediate layer at room temperature is greater than that of the reproduction layer at room temperature, for example, a saturation magnetization M_s of the intermediate layer at room temperature is greater than that of the reproduction layer at room temperature, for strengthening the in-plane magnetic anisotropy of the reproduction layer at the low temperature.

The memory layer is a layer for storing recorded information and thus is required to stably hold the magnetic domains. As a material of the memory layer, a material which has a large perpendicular magnetic anisotropy and can stably hold a magnetization state, for example, a rare earth-iron family amorphous alloy, such as, TbFeCo, DyFeCo, TbDyFeCo or the like, garnet, a platinum family-iron family periodic structure film, such as, Pt/Co, Pd/Co or the like, or a platinum family-iron family alloy, such as, PtCo, PdCo or the like is preferable. An element, such as, Al, Ti, Pt, Nb, Cr or the like may be added to the reproduction layer, the intermediate layer and the memory layer for improving their corrosion resistances. For enhancing the interference effect and the protective performance, a dielectric layer formed of SiN_x , AlO_x , TaO_x , SiO_x or the like may be provided in addition to the foregoing reproduction, intermediate and memory layers. Further, for improving thermal conductivity, a layer formed of Al, AlTa, AlTi, TiCr, Cu or the like and having good thermal conductivity may be provided. Further, an initialization layer in which magnetization is aligned in one direction for performing the optical modulation overwrite may be provided. Further, auxiliary layers for recording assistance and reproducing assistance may be provided to adjust the exchange-coupling force or the magnetostatic coupling force. Moreover, a protective coat formed of the foregoing dielectric layer or a polymer resin may be added as a protective film.

Now, the recording/reproduction process of the present invention will be described hereinbelow.

First, magnetic domains are formed, according to a data signal, in the memory layer of the magneto-optical recording medium of the present invention. In a first recording method, recording is performed, after once erasing old information, by modulating a laser power under a magnetic field being applied in a recording direction. In a second recording method, new information is overwrite-recorded on old information by modulating a laser power under an external magnetic field being applied. In these optical modulation recording methods, by determining an intensity of the laser beam in consideration of a linear velocity of the recording medium so as to allow only a given region within the light spot to reach near the Curie temperature of the memory layer, a recorded magnetic domain equal to or smaller than a diameter of the light spot can be formed. As a result, a signal having a period equal to or smaller than the diffraction limit of light can be recorded. On the other hand, in a third recording method, overwrite-recording is performed by modulating an external magnetic field under irradiation of the laser beam having a power to cause a temperature of the memory layer to be equal to or higher than its Curie temperature. In this case, the magnetic domain equal to or smaller than the diameter of the light spot can be formed by setting a modulation rate to be large depending on the linear velocity. As a result, a signal having a period equal to or smaller than the diffraction limit of light can be recorded.

As clear from later-described mechanism, in order for the super resolution of the present invention to function stably, it is necessary that magnetization around a recorded mark is oriented in a direction opposite to that of the mark.

In the first recording method which is the most popular, the laser power is held constant at a high power under a constant magnetic field being applied so as to initialize (erasing operation) magnetization of a track to be subjected to recording, and thereafter, in the state where a direction of the magnetic field is inverted, the laser power is modulated in intensity so as to form a desired recorded mark. At this time, when there is a portion around the recorded mark where directions of the magnetization are random, noise is caused upon reproduction. For this reason, it is generally performed to erase a region wider than the recorded mark for enhancing a quality of a reproduced signal. Accordingly, since the magnetization around the recorded magnetic domains aligns without fail in a direction opposite to that of the magnetic domains, the super resolution of the present invention operates stably in this recording method.

In the second recording method, a medium having a structure as described in Japanese Patent Application Laid-open No. 62-175948 (this medium has a write layer in which magnetization is aligned in one direction prior to recording, in addition to the memory layer for holding the recorded information) is used. Accordingly, the erasing operation in advance of recording is not required. On the other hand, when recording is effected to

this medium, a laser intensity is modulated between P_h and P_1 ($P_h > P_1$) depending on information to be recorded, under a constant magnetic field being applied in a direction opposite to that of the write layer. When the medium is increased to a temperature T_h corresponding to P_h , since T_h is set to be substantially equal to T_c of the write layer, magnetization of the memory layer and the write layer is oriented in the direction of the external magnetic field so as to form the magnetic domain. On the other hand, when the medium is increased only to a temperature T_1 corresponding to P_1 , a direction of magnetization becomes the same as that of the write layer. This process occurs regardless of the magnetic domain recorded in advance. It is assumed that a laser beam of P_h is irradiated onto the medium. In this case, although a portion forming the recorded magnetic domain is increased to T_h , a temperature distribution at this time extends two-dimensionally so that, even if the laser intensity is increased to P_h , there always occurs a portion around the magnetic domain where a temperature increases only to T_1 . Accordingly, the portion having the opposite magnetization direction exists around the recorded magnetic domain so that the super resolution of the present invention also operates stably in this recording method.

Further, as another recording method, a magnetic field modulation recording can be cited, wherein the direction of the foregoing external magnetic field is changed alternately. In this recording method, the magnetic field modulation is performed under irradiation of the DC laser beam at a high power. In order to record new information without history of the magnetic domain recorded before, a width forming the magnetic domain should be always constant. Accordingly, in this case, some measure should be taken, or otherwise, there occurs a region around the recorded magnetic domain where directions of the magnetization are random so that the super resolution of the present invention does not operate stably. Accordingly, when performing the magnetic field modulation recording, it is necessary that the initialization is executed with a power greater than the normal recording power or the initialization of magnetization is performed extensively relative to both land and groove, prior to shipping the medium or the first recording.

Now, the reproducing method of the present invention will be described hereinbelow.

In the present invention, the magnetic super resolution is realized by apparently and optically masking a partial region within the light spot without applying the external magnetic field. First, the magneto-optical recording medium and the magneto-optical reproducing method will be described with reference to the drawings, wherein a high-temperature region is formed with a rear mask and the other region is caused to be an aperture region, that is, the magnetization manner of the reproduction layer is such that the reproduction layer is a perpendicular magnetization film at room temperature and between room temperature and the Curie temperature. Figs. 7A, 7B and 7C are diagrams showing a process, wherein the recorded magnetic domain of the reproduction layer transferred from the memory layer (hereinbelow simply referred to as "recorded magnetic domain") is contracted in the high-temperature region while the light spot moves. For brevity, in Figs. 7A to 7C, the contracting process of only one recorded magnetic domain is shown. Further, in these figures, a rare earth-iron family ferrimagnetic substance is used as a magnetic material, blank arrows 30 represent the whole magnetization, black arrows 31 represent the iron family sublattice magnetization, the reproduction layer 11 is an RE rich magnetic layer and the memory layer 13 is a TM rich magnetic layer. On the other hand, in Figs. 5A to 5C, the whole image upon reproduction is shown along with the temperature distribution. The temperature distribution of the medium is shifted from the center of the light spot in a direction opposite to a moving direction of the light spot due to the limit of thermal conductivity. As shown in Fig. 7A, shortly after the light spot 2 has reached the recorded magnetic domain 1, the recorded magnetic domain 1 does not reach the high-temperature region 5. In addition to an effective magnetic field H_{wi} due to the exchange-coupling force from the memory layer 13, an effective magnetic field H_{wb} due to the Bloch magnetic wall energy and a static magnetic field H_d from the interior of the medium are applied to the recorded magnetic domain 1. H_{wi} works to stably hold the recorded magnetic domain 1 of the reproduction layer, while H_{wb} and H_d apply forces in directions to expand and contract the recorded magnetic domain. Accordingly, in order for the reproduction layer 11 to be stably transferred with the magnetization of the memory layer 13, a condition expressed by relation (1) should be satisfied before the recorded magnetic domain 1 reaches the high-temperature region 5.

$$|H_{wb} - H_d| < H_{c1} + H_{wi} (T < T_h - \text{mask}) \quad (1)$$

A coercive force H_{c1} of the reproduction layer 11 is apparently increased due to the exchange-coupling force from the memory layer 13. Accordingly, relation (1) can be easily established to stably transfer the magnetization information of the memory layer 13 so that the recorded information can be reproduced accurately.

If an interface magnetic wall energy between the reproduction layer 11 and the memory layer 13 is σ_{wi} , a saturation magnetization of the recorded magnetic domain 1 of the reproduction layer 11 is M_{s1} and a film thickness of the reproduction layer is h_1 , H_{wi} is expressed by relation (2).

$$H_{wi} = \sigma_{wi} / 2M_{s1}h_1 \quad (2)$$

When the light spot further moves so that the recorded magnetic domain 1 enters the high-temperature region 5, H_{wi} reaches around the Curie temperature of the intermediate layer 12 so that σ_{wi} is rapidly de-

creased to diminish H_{wi} . Accordingly, the reproduction layer 11 returns to the state where the coercive force is small, to satisfy relation (3) so that a Bloch magnetic wall 8 of the recorded magnetic domain 1 easily moves.

$$|H_{wb} - H_d| < H_{c1} + H_{wi} \quad (T > T_h - \text{mask}) \quad (3)$$

If a Bloch magnetic wall energy is σ_{wb} and a radius of the recorded magnetic domain 1 of the reproduction layer 11 is r , H_{wb} is expressed by relation (4) and works in a direction to contract the recorded magnetic domain 1 (Fig. 8).

$$H_{wb} = \sigma_{wb} / 2Ms_1r \quad (4)$$

Accordingly, when $H_{wb} - H_d$ becomes dominant in positive (sign is +) to satisfy relation (5), the recorded magnetic domain 1 is contracted.

$$|H_{wb} - H_d| < H_{c1} + H_{wi} \quad (T > T_h - \text{mask}) \quad (5)$$

In this manner, as shown in Fig. 7B, the recorded magnetic domain 1 is contracted and inverted when entering the high-temperature region 5, and as shown in Fig. 7C, the magnetization is all oriented in an erasing direction.

Specifically, as shown in Figs. 5A to 5C, since the reproduction layer 11 always becomes a perpendicular magnetization film orienting in the erasing direction at the high-temperature region 5 within the light spot 2, thus serving as an optical mask (rear mask 5). Accordingly, as shown in Fig. 5A, the light spot 2 is apparently narrowed to a region excluding the high-temperature region 5 and serving as the aperture region 3 so that the recorded magnetic domain (recorded mark) having a period equal to or smaller than the detection limit can be detected.

On the other hand, in the conventional super-resolution method, as described in Japanese Patent Application Laid-open No. 4-255947, a mask is formed using an external magnetic field H_r and based on relation (6).

$$H_r > H_{c1} + H_{wi} \quad (6)$$

In the present invention, since the mask is formed by changing a magnitude of the effective magnetic field $H_{wb} - H_d$ inside the medium instead of using the external magnetic field H_r , the external magnetic field is not necessary.

Now, the method for making $H_{wb} - H_d$ dominant in positive at a high temperature will be described in further detail.

H_d in relation (5) is formed by a leakage magnetic field H_{leak} from the ambient erasing magnetization, a static magnetic field H_{st} from the magnetization of the memory layer 13 and the like, and is expressed by relation (7).

$$H_d = H_{leak} \pm H_{st} \quad (7)$$

In relation (7), H_{leak} works in a direction to expand the recorded magnetic domain 1 as shown in Fig. 8. A first method to make $H_{wb} - H_d$ dominant in positive in the high-temperature region is a method which diminishes H_{leak} , that is, reduces a magnetic field preventing inversion of the recorded magnetic domain 1. If a saturation magnetization of the reproduction layer 11 around the recorded magnetic domain to be made disappear is Ms_1'' and a radius of the recorded magnetic domain 1 is r , H_{leak} is roughly expressed by relation (8).

$$H_{leak} = 4\pi Ms_1'' h_1 (h_1 + 3/2r) \quad (8)$$

In relation (8), the radius r of the recorded magnetic domain and the film thickness h_1 of the reproduction layer can not be easily changed. Accordingly, it is necessary to diminish Ms_1'' . This is achieved by selecting a material for the reproduction layer, which has a compensation temperature between room temperature and the Curie temperature. Since the magnetization is reduced at the compensation temperature, H_{leak} can be diminished. An example will be described, wherein GdFeCo is used for the reproduction layer 11. Figs. 10A to 10C respectively show temperature dependencies of Ms of GdFeCo having different compensation temperatures. Although the maximum temperature on the medium upon reproduction differs depending on the reproducing power, the maximum temperature shown in the figures reaches approximately 160°C - 220°C in general, and the medium-temperature region is a region where the temperature is lower than the maximum temperature by about 20°C - 60°C. Accordingly, in case of Figs. 10B and 10C, Ms_1'' is large so that H_{leak} also becomes large. If a composition in which the compensation temperature exists between room temperature and the Curie temperature, is used for the reproduction layer 11, Ms in the medium-temperature and high-temperature regions is reduced to diminish H_d . When GdFeCo is used for the reproduction layer 11, since the compensation temperature largely depends on a composition of, particularly, a rare earth element (Gd) as shown in Fig. 11, it is preferable to set a Gd content to be 25 to 35 at % in case a magnetic layer mainly containing GdFeCo is used as the reproduction layer 11.

A second method is a method which makes H_{st} dominant in negative, that is, facilitates inversion of the recorded magnetic domain 1 by the static magnetic field H_{st} from the memory layer 13. In relation (7), when entering the high-temperature region from the exchange-coupling region, H_{st} is determined whether to work in a direction to contract the recorded magnetic domain 1 or work to hold the recorded magnetic domain 1,

depending on whether the reproduction layer 11 and the memory layer 13 are of a parallel type or an anti-parallel type. The reason is as follows:

As shown in Figs. 9A and 9B, the exchange-coupling force aligns in a direction of TM sublattice magnetization where the exchange force is great, and the magnetostatic coupling force aligns in a direction of the whole magnetization. Fig. 9A shows the anti-parallel type, wherein the reproduction layer 11 is RE rich and the memory layer 13 is TM rich. In this case, when the intermediate layer 12 reaches around the Curie temperature to cut off the exchange coupling, the recorded magnetic domain 1 is caused to be inverted in magnetization due to the magnetostatic coupling force with the memory layer 13 (Hst becomes negative). To the contrary, in case of the parallel type as shown in Fig. 9B (in the figure, both the reproduction and memory layers are shown to be TM rich), the magnetostatic coupling force works in a direction to hold the exchange-coupling state (Hst becomes positive). Accordingly, for inverting the recorded magnetic domain 1, the composition of the anti-parallel type is desired.

Specifically, for example, both the reproduction layer 11 and the memory layer 13 may be set to be ferromagnetic, and kinds of the dominant sublattice magnetization in the reproduction layer 11 and the memory layer 13 may be set to be opposite to each other. For example, the reproduction layer 11 and the memory layer 13 are formed of rare earth (RE) iron family (TM) element alloys, and the reproduction layer 11 is arranged to be rare earth element sublattice magnetization dominant (RE rich), while the memory layer 13 is arranged to be iron family element sublattice magnetization dominant (TM rich) at room temperature. It is necessary that this anti-parallel composition is achieved at least at the temperature where the recorded magnetic domain 1 is contracted (in the foregoing medium-temperature region to high-temperature region 5).

A value of Hst can be roughly calculated using, on the assumption that the magnetic domain is cylindrical, a radius of the recorded magnetic domain 1, a distance from the magnetic domain of the memory layer 13 and a saturation magnetization Ms2 of the memory layer (see pages 40 and 41, Nagoya University doctoral thesis "Research about Rare Earth-Iron Family Amorphous Alloy Thin Film and Magnetism and Magneto-Optical Effect of Composite Film thereof" 1985. 3 by Tadashi Kobayashi). Hst is proportional to the saturation magnetization Ms2 of the memory layer (relation 9).

$$Hst \propto Ms2 \quad (9)$$

Accordingly, it is preferable that Ms2 is set to be such a large value that does not deteriorate stability of the recorded information or cause inversion of the erasing magnetization.

Further, the static magnetic field Hst from the memory layer 13 also works on the magnetization in the erasing direction. However, if the magnetization in the erasing direction is inverted by Hst, a magnetic wall is formed over an extensive range of the high-temperature region 5 so that the magnetic wall energy is largely increased. Accordingly, the magnetization inversion does not occur, and the magnetization in the erasing direction is held. Thus, in the high-temperature region 5, a region is generated in which magnetization is always oriented in the erasing direction. This region becomes the rear mask 5. If a radius of the inverted magnetic domain is R, an effective magnetic field Hwb' of the Bloch magnetic wall energy in case of the erasing magnetization being inverted is expressed by relation (10).

$$Hwb' = \sigma_{wb}/2Ms1R \quad (10)$$

Thus, a condition that the erasing magnetization is not inverted by Hst is expressed by relation (11).

$$Hwb' > Hst \quad (11)$$

Only one of the foregoing two methods, that is, the method of reducing Hleak and the method of increasing Hst at a negative side, may be used. On the other hand, if the two methods are used in combination, the super-resolution effect is realized to the greatest extent. As described above, by using the magneto-optical recording medium of the present invention, the magnetization can be oriented in a uniform direction in the high-temperature region 5 of the light spot upon reproduction without applying the external magnetic field so as to optically mask the magnetization of the memory layer 13.

Further, in the medium where the reproduction layer is a perpendicular magnetization film at room temperature and between room temperature and the Curie temperature, since the aperture region 3 extends over substantially all the region other than the high-temperature region 5, it is necessary that the reproduction layer 11 becomes a perpendicular magnetization film to a sufficient extent even in the low-temperature region so as to stably transfer the magnetization of the memory layer 13. Accordingly, a material in which the magnetization is oriented in a perpendicular direction to a further extent as compared with the reproduction layer 11 (a material having a coercive force greater than the reproduction layer 11), for example, TbFe, DyFe, TbFeCo and DyFeCo, may be preferably used for the intermediate layer 12. By using such a material, the interface magnetic wall energy σ_{wi} is increased so that the reproduction layer 11 can transfer the magnetization information of the memory layer 13 stably due to the exchange-coupling force. Further, in case the reproduction layer 11 has a small perpendicular magnetic anisotropy, for example, even in case the reproduction layer, when alone, becomes an in-plane magnetization film, by using the intermediate layer in which the magnetization is oriented

in the perpendicular direction to a further extent, to be laminated on the reproduction layer 11, the perpendicular magnetic anisotropy of the reproduction layer 11 is sufficiently increased to allow the aperture region to transfer the magnetization information of the memory layer 13 accurately.

The formation of the mask has been described above using the expressions of relation of the magnetic field. On the other hand, the formation of the mask can also be described using expressions of relation of the energy. When, particularly, M_s is close to 0, the magnetic field, even largely applied to, does not effectively act on the recorded magnetic domain. Accordingly, it is more preferable to describe it in terms of the energy since the formation of the mask can be judged more precisely. For describing in terms of the energy relation, the foregoing definition and relation expressions of the magnetic field may be multiplied by $2M_s$, respectively. Accordingly, relations (1), (2), (3), (4), (5), (7) and (8) are expressed by relations (12), (13), (14), (15), (16), (17) and (18). In the relations, E_{wb} represents a Bloch magnetic wall energy, E_d a static magnetic field energy from the interior of the medium applied to the Bloch magnetic wall of the recorded magnetic domain, E_{wi} an exchange-coupling energy with the second magnetic layer, and E_{c1} a coercive force energy of the first magnetic layer.

$$|E_{wb} - E_d| < E_{c1} + E_{wi} \quad (T < T_h - \text{mask}) \quad (12)$$

$$E_{wi} = \sigma_{wi} / h_1 \quad (13)$$

$$|E_{wb} - E_d| > E_{c1} + E_{wi} \quad (T > T_h - \text{mask}) \quad (14)$$

$$E_{wb} = \sigma_{wb} / r \quad (15)$$

$$|E_{wb} - E_d| > E_{c1} + E_{wi} \quad (T > T_h - \text{mask}) \quad (16)$$

$$E_d = E_{leak} + E_{st} \quad (17)$$

$$E_{leak} = 8\pi M_s^2 h_1 (h_1 + 3/2r) \quad (18)$$

Further, the method has been described before, wherein the magnetization information of the memory layer 13 is optically masked only in the high-temperature region 5 within the light spot 2. Now, a method in which the low-temperature region is also masked in addition to the high-temperature region 5 so as to detect the magnetization information only in the medium-temperature region, that is, a magneto-optical recording medium and an information reproducing method in which the magnetization manner of the reproduction layer is such that the reproduction layer is an in-plane magnetization film at room temperature and transits to a perpendicular magnetization film between room temperature and the Curie temperature, will be described hereinbelow. Figs. 6A, 6B and 6C show a structure of the mask and the aperture region, the magnetization state and the temperature distribution for the medium having the present manner, respectively. In this case, a magnetic film which is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film at a high temperature, is used for the reproduction layer 11. An example of such a magnetic film will be explained hereinbelow. In general, in case of a single-layer magnetic film, if a saturation magnetization is M_s and a perpendicular magnetic anisotropy energy is K_u , a main direction of its magnetization is known to be determined by an effective perpendicular magnetic anisotropy constant K defined by relation (19).

$$K = K_u - 2\pi M_s^2 \quad (19)$$

wherein, $2\pi M_s^2$ represents a diamagnetic field energy.

When K is positive, the magnetic film becomes a perpendicular magnetization film. On the other hand, when K is negative, the magnetic film becomes an in-plane magnetization film. Accordingly, as shown in Fig. 12, the magnetic film which changes relation in magnitude between K_u and $2\pi M_s^2$ depending on a temperature is effective for transition from an in-plane magnetization film to a perpendicular magnetization film. In such a reproduction layer 11, relation (20) is established in the low-temperature region where a temperature is equal to or lower than a temperature T_l -mask at which the region (the aperture region 3 in Fig. 6A) reproducing the magnetization information of the memory 13 is reached. Accordingly, the low-temperature region becomes an in-plane magnetization film (front mask 4) to mask the magnetization information of the memory layer 13.

$$K_u < 2\pi M_s^2, K < 0 \quad (T < T_l - \text{mask}) \quad (20)$$

On the other hand, when a temperature T of the medium is increased, M_s is decreased to rapidly diminish $2\pi M_s^2$. Accordingly, the relation in magnitude between $2\pi M_s^2$ and K_u is reversed to satisfy relation (21).

$$K_u > 2\pi M_s^2, K > 0 \quad (T_l - \text{mask} < T) \quad (21)$$

Accordingly, an in-plane magnetization film transits to a perpendicular magnetization film to form the aperture region 3. Further, at a temperature equal to or higher than T_h -mask, the rear mask 5 is formed in the high-temperature region 5 as described before.

As shown in Figs. 6A to 6C, in this method, the reproduction layer 11 becomes an in-plane magnetization film in the low-temperature region 4 and a perpendicular magnetization film in the high-temperature region 5 where the magnetization is always oriented in the erasing direction, so that both work as optical masks. Only the medium-temperature region of the reproduction layer 11 becomes a perpendicular magnetization film where a signal of the memory layer 13 is transferred due to the exchange coupling so that the medium-temperature region becomes the information detectable region (aperture region 3).

In this method, since the low-temperature region 4 is masked in addition to the high-temperature region 5, information on the adjacent tracks (grooves 6a, 6b in Fig. 6A) can also be masked. Thus, crosstalk is reduced to improve the track density. Further, as described above, in the method where the medium-temperature region is used as the detecting region, the aperture region 3 within the laser spot 2 becomes a narrow region sandwiched between the high-temperature region 5 and the low-temperature region 4. Further, even when the laser power fluctuates, widths of the aperture region 3 do not change, but are held constant. Thus, even when the higher-density recording is performed, the reproduction can be achieved satisfactorily with high resolution so that the stabled reproduction is realized even at occurrence of the laser power fluctuation. Further, in the present invention, since the detecting region is located near the center of the laser spot, a more excellent C/N ratio can be expected.

As described before, Figs. 10A to 10C respectively show temperature dependencies of M_s of GdFeCo having different compensation temperatures. Among them, in the composition where the compensation temperature exists between room temperature and the Curie temperature as shown in Fig. 10A, since a saturation magnetization is reduced to 0 at a temperature range higher than room temperature and lower than the Curie temperature, an intersection is generated between the diamagnetic field energy and the perpendicular magnetic anisotropy constant so that the transition from an in-plane magnetization film to a perpendicular magnetization film occurs. On the other hand, in Figs. 10B and 10C, such a transition does not occur. Accordingly, as a material of the reproduction layer 11, for example, a material having a compensation temperature between room temperature and the Curie temperature is preferable, and further, a material having a magnetic anisotropy which is smaller than the diamagnetic field energy $2\pi M_s^2$ at room temperature, is preferable.

When laminating this magnetic film via the memory layer 13, the intermediate layer 12 and the like, K_u is apparently increased due to action of the exchange-coupling force from the memory layer 13. Accordingly, a temperature at which the transition to a perpendicular magnetization film occurs, shifts to a lower temperature side as compared with the case of no such lamination. However, by setting a temperature of transition to the perpendicular magnetization in the single-layer state to a relatively high value, it can be arranged that the magnetic film is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film when increased in temperature, even in case the magnetic film is laminated with the memory layer 13.

In this case, a condition where the reproduction layer 11 becomes an in-plane magnetization film, is expressed by relation (20').

$$K_u + E_{w13} < 2\pi M_s^2 \quad (20')$$

where E_{w13} represents an energy for orienting the magnetization of the reproduction layer 11 in a perpendicular direction due to the exchange-coupling force from the memory layer 13.

On the other hand, a condition where the reproduction layer 11 becomes a perpendicular magnetization film, is expressed by relation (21').

$$K_u + E_{w13} > 2\pi M_s^2 \quad (21')$$

The intermediate layer 12 may be in the form of a perpendicular magnetization film having a large perpendicular magnetic anisotropy. However, when the intermediate layer 12 having the large perpendicular magnetic anisotropy is laminated on the reproduction layer 11 being an in-plane magnetization film at room temperature, the interface magnetic wall tends to permeate into a side of the reproduction layer 11 as shown in Fig. 15A so that the magnetization information of the memory layer 13 can not be masked sufficiently. In view of this, it is preferable to use a magnetic layer for the intermediate layer 12, which has a perpendicular magnetic anisotropy small enough to work as a magnetic wall portion between the reproduction layer 11 and the memory layer 13 in a low-temperature region near room temperature as shown in Fig. 15B, and in other words, which has a large in-plane anisotropy. For working as a magnetic wall portion, a magnetic material having small magnetic wall energy, such as, GdFe or GdFeCo, may be preferably used as the intermediate layer. The fact that the in-plane anisotropy is large corresponds to the fact that K in relation (19) is a smaller value (K is a negative value and its absolute value is large). In order to make K of the intermediate layer 12 at room temperature smaller than K of the reproduction layer 11 at room temperature, when, for example, using a rare earth-iron family element alloy, such as, GdFe, GdFeCo or the like, M_s of the intermediate layer 12 at room temperature is made greater than that of the reproduction layer 11 by increasing a rate of a rare earth element (Gd). Further, it is also effective to diminish K_u by increasing a content of Co. Among them, the method of increasing M_s is preferable since M_s is reduced as the intermediate layer 12 approaches the Curie temperature so that a perpendicular anisotropy is increased in the aperture region. However, since the reproduction layer 11 does not become a perpendicular magnetization film to a sufficient extent in the aperture region when the in-plane anisotropy of the intermediate layer 12 is increased too much, the in-plane anisotropy thereof is increased to a degree which does not deteriorate the signal quality.

Quite naturally, the intermediate layer is arranged to reach the Curie temperature after the reproduction layer 11 becomes a perpendicular magnetization film and exchange-coupled to the memory layer 13. In other

words, it is necessary to arrange that the reproduction layer 11 is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film at least between room temperature and the Curie temperature of the intermediate layer 12. Examples of temperature dependencies of M_s of the reproduction layer 11, the intermediate layer 12 and the memory layer 13 of such a medium are shown in Figs. 13A to 13C, respectively. In the figures, positive M_s represents RE rich, while negative M_s represents TM rich.

The present invention will be described in further detail by way of experimental examples. However, the present invention is not limited to these experimental examples.

First, a magneto-optical recording medium in which a reproduction layer is a perpendicular magnetization film at room temperature and between room temperature and a Curie temperature was prepared and evaluated, which will be described in the following Experimental Examples 1 and 2.

(Experimental Example 1)

Si, Gd, Tb, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate having a diameter of 130mm and a polycarbonate substrate with lands and grooves were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-5} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.4Pa, and thereafter, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 400Å thickness, a TbFeCo intermediate layer of 50Å thickness, a TbFeCo memory layer of 350Å thickness and an SiN protective layer of 700Å thickness were formed in the order named, thus obtaining the magneto-optical recording medium of the present invention with a structure shown in Fig. 14. Upon formation of each SiN dielectric layer, N_2 gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N_2 gases, so as to obtain a refractive index of 2.2.

The composition of the GdFeCo reproduction layer was $Gd_{30}(Fe_{65}Co_{35})_{70}$ and represented RE rich at room temperature, M_s of 196emu/cc, a compensation temperature of 240°C and a Curie temperature of 300°C or more.

The composition of the TbFeCo intermediate layer was $Tb_{18}(Fe_{97}Co_3)_{82}$ and represented TM rich at room temperature, M_s of -95emu/cc and a Curie temperature of 135°C.

The composition of the TbFeCo memory layer was $Tb_{18}(Fe_{88}Co_{12})_{82}$ and represented TM rich at room temperature, M_s of -120emu/cc and a Curie temperature of 220°C.

After recording a magnetic domain of a 0.78μm mark length in the magneto-optical recording medium, the magnetic domain was observed by a polarizing microscope under irradiation of a semiconductor laser beam of 830nm. While increasing the laser power, it was confirmed that the recorded magnetic domain was contracted and the magnetization was oriented in an erasing direction at the center (high-temperature region) of the light spot at a certain laser power.

Subsequently, the recording/reproduction characteristic was measured using this magneto-optical recording medium. The measurement was performed by setting N.A. of an objective lens to be 0.55, a laser beam wavelength to be 780nm, a recording power to be in a range of 7~13mW and a reproducing power to be in a range of 2.5~3.5mW, so as to provide the highest C/N ratio. A linear velocity was set to be 9m/s. First, erasing was performed entirely on the medium, and thereafter, carrier signals of 5.8MHz, 11.3MHz and 15MHz (corresponding to mark lengths 0.78μm, 0.40μm and 0.30μm, respectively) were recorded in the memory layer so as to examine the mark-length dependency of C/N.

Subsequently, crosstalk with the adjacent tracks (hereinafter referred to as "crosstalk") was measured. Specifically, after recording a signal of a 0.78μm mark length on the land as in the foregoing manner and measuring a carrier level C1, a carrier level C2 was similarly measured upon tracking the adjacent groove where data had been erased, and the crosstalk was represented by a ratio (C2/C1). Since the experiment was performed on the assumption that data were recorded on both the land and groove, an effective track pitch was 0.8μm.

Both the C/N ratios and the crosstalk were measured without applying an initializing magnetic field and a reproducing magnetic field. Table 1 shows compositions and materiality values of each layer and the results of the C/N ratios and the crosstalk.

(Experimental Example 2)

Using the same apparatus and method as in Experimental Example 1, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 400Å thickness, a DyFeCo intermediate layer of 60Å thickness, a TbFeCo memory layer of 350Å thickness and an SiN protective layer of 700Å thickness were formed on a poly-

carbonate substrate in the order named, thus obtaining the magneto-optical recording medium of the present invention with a structure shown in Fig. 14.

The composition of the GdFeCo reproduction layer was $\text{Gd}_{28}(\text{Fe}_{65}\text{Co}_{35})_{72}$ and represented RE rich at room temperature, Ms of 160emu/cc, a compensation temperature of 180°C and a Curie temperature of 300°C or more.

The composition of the DyFeCo intermediate layer was $\text{Dy}_{20}(\text{Fe}_{97}\text{Co}_3)_{80}$ and represented TM rich at room temperature, Ms of -80emu/cc and a Curie temperature of 128°C.

The composition of the TbFeCo memory layer was $\text{Tb}_{18}(\text{Fe}_{88}\text{Co}_{12})_{82}$ and represented TM rich at room temperature, Ms of -120emu/cc and a Curie temperature of 220°C.

Subsequently, using this magneto-optical recording medium, the mark-length dependency of C/N and the crosstalk were examined as in Experimental Example 1. The results are shown in Table 1.

Now, a magneto-optical recording medium in which a reproduction layer is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film between room temperature and a Curie temperature was prepared and evaluated, which will be described in the following Experimental Examples 3, 4, 5 and 6.

(Experimental Example 3)

Using the same apparatus and method as in Experimental Example 1, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 400Å thickness, a GdFe intermediate layer of 100Å thickness, a TbFeCo memory layer of 300Å thickness and an SiN protective layer of 700Å thickness were formed on a polycarbonate substrate in the order named, thus obtaining a sample with a structure shown in Fig. 14.

The composition of the GdFeCo reproduction layer was set to represent RE rich at room temperature, Ms of 218emu/cc, a compensation temperature of 238°C and a Curie temperature of 300°C or more.

The composition of the GdFe intermediate layer was set to represent RE rich at room temperature, Ms of 475emu/cc and a Curie temperature of 190°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -150emu/cc and a Curie temperature of 260°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was evaluated as in Experimental Example 1. The results are shown in Table 1.

(Experimental Example 4)

Using the same apparatus and method as in Experimental Example 1, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 450Å thickness, a GdFe intermediate layer of 80Å thickness, a TbFeCo memory layer of 320Å thickness and an SiN protective layer of 700Å thickness were formed on a polycarbonate substrate in the order named, thus obtaining a sample with a structure shown in Fig. 14.

The composition of the GdFeCo reproduction layer was set to represent RE rich at room temperature, Ms of 170emu/cc, a compensation temperature of 190°C and a Curie temperature of 300°C or more.

The composition of the GdFe intermediate layer was set to represent RE rich at room temperature, Ms of 540emu/cc and a Curie temperature of 165°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -50emu/cc and a Curie temperature of 240°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was evaluated as in Experimental Example 1. The results are shown in Table 1.

(Experimental Example 5)

Using the same apparatus and method as in Experimental Example 1, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 380Å thickness, a GdFe intermediate layer of 120Å thickness, a TbFeCo memory layer of 350Å thickness and an SiN protective layer of 700Å thickness were formed on a polycarbonate substrate in the order named, thus obtaining a sample with a structure shown in Fig. 14.

The composition of the GdFeCo reproduction layer was set to represent RE rich at room temperature, Ms of 280emu/cc, a compensation temperature of 290°C and a Curie temperature of 300°C or more.

The composition of the GdFe intermediate layer was set to represent RE rich at room temperature, Ms of 420emu/cc and a Curie temperature of 195°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -200emu/cc and a Curie temperature of 220°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was evaluated as in Experimental Example 1. The results are shown in Table 1.

(Experimental Example 6)

Using the same apparatus and method as in Experimental Example 1, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 430Å thickness, a GdFeCo intermediate layer of 130Å thickness, a TbFeCo memory layer of 350Å thickness and an SiN protective layer of 700Å thickness were formed on a polycarbonate substrate in the order named, thus obtaining a sample with a structure shown in Fig. 14.

The composition of the GdFeCo reproduction layer was set to represent RE rich at room temperature, Ms of 250emu/cc, a compensation temperature of 260°C and a Curie temperature of 300°C or more.

The composition of the GdFeCo intermediate layer was set to represent RE rich at room temperature, Ms of 480emu/cc and a Curie temperature of 176°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -240emu/cc and a Curie temperature of 270°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was evaluated as in Experimental Example 1. The results are shown in Table 1.

Now, the known super-resolution magneto-optical recording medium was prepared, and evaluation thereof was performed in the same manner as in the foregoing experimental examples.

(Comparative Example 1)

First, a medium the same as that described in Japanese Patent Application Laid-open No. 3-93056 was prepared and evaluated.

Using the same film forming apparatus and method as in Experimental Example 1, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 300Å thickness, a TbFeCoAl intermediate layer of 100Å thickness, a TbFeCo memory layer of 400Å thickness and an SiN protective layer of 700Å thickness were formed on a glass substrate in the order named, thus obtaining the magneto-optical recording medium of Comparative Example 1.

The composition of the GdFeCo reproduction layer was set to represent TM rich at room temperature, Ms of -180emu/cc and a Curie temperature of 300°C or more.

The composition of the TbFeCoAl intermediate layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 140°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -150emu/cc and a Curie temperature of 250°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was measured as in Experimental Example 1. In this case, however, upon reproduction, a reproducing magnetic field was applied to the medium in a perpendicular direction, by changing a magnitude of the reproducing magnetic field between 0 Oe, 200 Oe and 400 Oe. The results are shown in Table 1.

(Comparative Example 2)

Next, a medium the same as that described in Japanese Patent Application Laid-open No. 3-255946 was prepared and evaluated.

Using the same film forming apparatus and method as in Experimental Example 1, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 300Å thickness, a TbFeCoAl intermediate layer of 100Å thickness, a GdFeCo auxiliary layer of 160Å, a TbFeCo memory layer of 400Å thickness and an SiN protective layer of 700Å thickness were formed on a glass substrate in the order named, thus obtaining the magneto-optical recording medium of Comparative Example 2.

The composition of the GdFeCo reproduction layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 300°C or more.

The composition of the TbFeCoAl intermediate layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 140°C.

The composition of the GdFeCo auxiliary layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 280°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -150emu/cc and a Curie temperature of 250°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic

was measured as in Experimental Example 1. In this case, however, prior to reproduction, an initializing magnetic field in a perpendicular direction was applied to the medium by changing a magnitude of the initializing magnetic field between 0 Oe, 1,000 Oe and 2,000 Oe, and a reproducing magnetic field was applied to the medium by changing a magnitude of the reproducing magnetic field between 0 Oe, 200 Oe and 400 Oe. The results are shown in Table 1.

(Comparative Example 3)

Next, a medium the same as that described in Japanese Patent Application Laid-open No. 6-124500 was prepared and evaluated.

Using the same film forming apparatus and method as in Experimental Example 1, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 400Å thickness, a TbFeCo memory layer of 400Å thickness and an SiN protective layer of 700Å thickness were formed on a glass substrate in the order named, thus obtaining the magneto-optical recording medium of Comparative Example 3.

The composition of the GdFeCo reproduction layer was set to represent RE rich at room temperature, Ms of 180emu/cc, a compensation temperature of 240°C and a Curie temperature of 300°C or more.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of 150emu/cc and a Curie temperature of 250°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was measured as in Experimental Example 1. The results are shown in Table 1.

According to the measurement results of the foregoing Experimental Examples 1 to 6, particularly to the measurement results with the short mark lengths, in any of the mediums, the high C/N ratios were obtained with the short mark lengths without applying the reproducing magnetic field. Further, in the mediums where the reproduction layer is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film between room temperature and the Curie temperature, the improvement in C/N and the crosstalk was observed. On the other hand, in the medium of Comparative Example 1, the sufficiently high C/N ratio was not obtained without applying the reproducing magnetic field of 400 Oe. Further, the crosstalk showed the bad results. On the other hand, in the medium of Comparative Example 2, no improvement in C/N and the crosstalk was observed without applying the sufficient initializing magnetic field and the reproducing magnetic field. Further, in Comparative Example 3, the sufficiently high C/N ratio was not obtained.

Accordingly, in the magneto-optical recording medium of the present invention, the C/N ratio or both the C/N ratio and the crosstalk can be improved without applying the reproducing magnetic field or without applying both the initializing magnetic field and the reproducing magnetic field. Thus, the line recording density or both the line recording density and the track density can be improved.

Next, verification of the foregoing energy relation expressions (12) to (18) was performed in Experimental Examples 7 to 10 and 11 to 15 and Comparative Examples 4 to 8.

(Experimental Example 7)

Si, Gd, Tb, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate having a diameter of 130mm and a polycarbonate substrate with lands and grooves were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-5} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.5Pa, and thereafter, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 400Å thickness, a TbFeCo intermediate layer of 100Å thickness, a TbFeCo memory layer of 350Å thickness and an SiN protective layer of 700Å thickness were formed in the order named, thus obtaining the magneto-optical recording medium of the present invention with a structure shown in Fig. 14. Upon formation of each SiN dielectric layer, N₂ gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N₂ gases, so as to obtain a refractive index of 2.1.

The composition of the GdFeCo reproduction layer was Gd_x(Fe₅₇Co₄₃)_{100-x} (a figure of a composition ratio represents an atomic ratio (%); hereinafter same will apply to), and x was set to be 25%. Hereinafter, a polarity of a saturation magnetization will be described as being positive in case of rare earth element sublattice magnetization dominant and as being negative in case of iron family element sublattice magnetization dominant.

The composition of the TbFeCo intermediate layer was Tb₂₀(Fe₉₇Co₃)₈₀. A film of this composition was measured alone and represented Ms of -120emu/cc at room temperature and a Curie temperature of 155°C. Since the medium of the present example is a medium of a front-aperture detection (FAD) type in which only the rear mask is formed, TbFeCo having a large perpendicular magnetic anisotropy is used for the intermediate

layer so as to avoid formation of a front mask as much as possible.

The composition of the TbFeCo memory layer was $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization Ms2, and represented Ms2 of -240emu/cc at room temperature and a Curie temperature of 250°C. The temperature dependency of Ms2 is shown in Fig. 17.

(Experimental Example 8)

Subsequently, using the same apparatus and method as in Experimental Example 7, the magneto-optical recording medium of the present invention having a structure like that in Experimental Example 7 was prepared. The intermediate layer and the memory layer respectively had the same film thicknesses and compositions as those of the intermediate layer and the memory layer in Experimental Example 7. The reproduction layer also had the same film thickness as that in Experimental Example 7, but the composition thereof was changed. Specifically, x was set to 26% in $\text{Gd}_x(\text{Fe}_{57}\text{Co}_{43})_{100-x}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization Ms1, and represented Ms1 of 151emu/cc at room temperature, a compensation temperature of 172°C and a Curie temperature of 300°C or more. The temperature dependency of Ms1 is shown in Fig. 16.

(Experimental Example 9)

Subsequently, using the same apparatus and method as in Experimental Example 7, the magneto-optical recording medium of the present invention having the same structure as that in Experimental Example 7 except for the composition of the reproduction layer, was prepared. Specifically, in the composition of the reproduction layer, x was set to 28% in $\text{Gd}_x(\text{Fe}_{57}\text{Co}_{43})_{100-x}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization Ms1, and represented Ms1 of 236emu/cc at room temperature, a compensation temperature of 225°C and a Curie temperature of 300°C or more. The temperature dependency of Ms1 is shown in Fig. 16.

(Experimental Example 10)

Subsequently, using the same apparatus and method as in Experimental Example 7, the magneto-optical recording medium of the present invention having the same structure as that in Experimental Example 7 except for the composition of the reproduction layer, was prepared. Specifically, in the composition of the reproduction layer, x was set to 31% in $\text{Gd}_x(\text{Fe}_{57}\text{Co}_{43})_{100-x}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization Ms1, and represented Ms1 of 325emu/cc at room temperature, a compensation temperature of 275°C and a Curie temperature of 300°C or more. The temperature dependency of Ms1 is shown in Fig. 16.

(Comparative Example 4)

Subsequently, using the same apparatus and method as in Experimental Example 7, the magneto-optical recording medium of Comparative Example 4 having a structure like that in Experimental Example 7 was prepared. The intermediate layer and the memory layer respectively had the same film thicknesses and compositions as those of the intermediate layer and the memory layer in Experimental Example 7. The reproduction layer also had the same film thickness as that in Experimental Example 7, but the composition thereof was changed. Specifically, x was set to 23% in $\text{Gd}_x(\text{Fe}_{57}\text{Co}_{43})_{100-x}$.

In the state where the magnetic films having the foregoing magnetic characteristics were laminated, it was examined whether a mask was formed in the high-temperature region. In case of the magnetostatic energy from the reproduction layer and the memory layer being dominant in the magnetostatic energy inside the medium, such as, in case of a magnetic layer other than the reproduction layer and the memory layer being relatively small in thickness, it is necessary, in order for the mask to be formed in the high-temperature region, that relation (22) is established based on the foregoing energy relation expressions.

$$E_{wb} - E_{leak} - E_{st} > E_{c1} + E_{wi} \quad (22)$$

First, energies applied to the Bloch magnetic wall of the recorded magnetic domain transferred to the reproduction layer (Bloch magnetic wall energy E_{wb} , static magnetic field energy E_{leak} from the reproduction layer, static magnetic field energy E_{st} from the memory layer) were derived.

Since each term in relation (22) depends on a temperature, each term is indicated relative to a temperature, for accuracy, so as to determine whether relation (22) is established. On the other hand, since E_{wi} is rapidly

reduced when the intermediate layer reaches around the Curie temperature, it is frequent that a sign of inequality in relation (22) is established before the intermediate layer reaches the Curie temperature. In view of this, it was examined whether relation (22) was established at the Curie temperature of the intermediate layer. At this time point, E_{wi} can be regarded as 0. For calculation, a Bloch magnetic wall energy E_{wb} of the reproduction layer and saturation magnetizations of the reproduction layer and the memory layer when the intermediate layer reaches the Curie temperature, are necessary. Accordingly, first, each of these materiality values was calculated. It is assumed that the reproduction layer and the memory layer lose the exchange-coupling force around the Curie temperature of the intermediate layer, i.e. about 155°C. Values at this temperature were taken as the materiality values. A Bloch magnetic wall energy σ_{wb} of the reproduction layer, when measured with the reproduction layer in the form of a single layer film, did not depend on the composition thereof within a range of this experiment and was about 1.9erg/cc at about 155°C. Further, M_{s2} of the memory layer was derived to be -225emu/cc from Fig. 17. On the other hand, M_{s1} of the reproduction layer differed depending on the compositions of the reproduction layer and were derived to be values as shown in Table 3. Using these materiality values, the energies were calculated.

First, by substituting $\sigma_{wb}=1.9\text{erg/cc}$ and $r=0.2\mu\text{m}$ into relation (15), $E_{wb}=9.50 \times 10^4 \text{ erg/cc}$ was obtained. Further, M_{s1} necessary for deriving E_{leak} was obtained in the following manner. Specifically, M_{s1} values corresponding to the respective reproduction layers were plotted. Since the precise measurement of M_{s1} around the compensation composition was not easy, a value corresponding to $\text{Gd}_x(\text{Fe}_{57}\text{Co}_{43})_{100-x}$ ($x=21\%$) alone was measured, and from this M_{s1} and other M_{s1} values, M_{s1} values corresponding to $x=23, 25$ were plotted as shown in Fig. 18 so as to presume M_{s1} values therefor. Using $h_1=30\text{nm}$ and $r=0.2\mu\text{m}$, E_{leak} was obtained from relation (18). Further, E_{st} is expressed by relation (23).

$$E_{st} = 2M_{s1}H_{st} \quad (23)$$

Accordingly, H_{st} was first calculated. H_{st} can be calculated from relation (24) in a simplified manner. In relations (24) and (25), a represents a radius of the recorded magnetic domain of the memory layer, h_2 represents a film thickness of the memory layer and (r, θ, z) represents coordinates of a measurement point, applied with a magnetic field H_{st} in a film-thickness direction, in the polar coordinate system having the origin which is the center of an end surface, at a light-incident side, of the recorded magnetic domain in the memory layer, wherein r represents a distance in a radial direction, θ represents an angle and z represents a distance toward the light-incident side.

$$H_{st} = (4\pi M_{s2}) \int_0^\pi \{k(r/a, z/a, \theta) - k(r/a, (z+h)/a, \theta)\} d\theta$$

--- (24)

$k(r/a, z/a, \theta)$ and $f(r, z, \theta)$ are defined by relations (25) and (26), respectively.

$$k(r/a, z/a, \theta) = - (1/\pi) \{ (z/a)/f(r, z, \theta) \} \{ 1 + f(r, z, \theta) \} / \{ 1 - (r/a) \cos\theta + f(r, z, \theta) \} \quad (25)$$

$$f(r, z, \theta) = \sqrt{1 + (r/a)^2 + (z/a)^2 - 2(z/a)\cos\theta} \quad (26)$$

Influence of a static magnetic field from a recorded magnetic domain of the memory layer other than a recorded magnetic domain of the memory layer just under a recorded magnetic domain of the reproduction layer being observed, is not so large. Accordingly, for simplification, relation (24) only deals with the recorded magnetic domain of the memory layer just under the recorded magnetic domain of the reproduction layer being observed. However, for further accuracy, it is better to calculate the magnetostatic energy from all the magnetization in the memory layer. This also applies to calculation of H_{leak} defined by relation (8) in a simplified manner. As a result of calculating relation (24) using a calculator, $H_{st}/(4\pi M_{s2})=0.15$ was obtained in case of a diameter of the recorded magnetic domain being $0.4\mu\text{m}$ ($a=0.2\mu\text{m}$). E_{st} was obtained using this value, M_{s1} and M_{s2} . The results are shown in Table 3.

Further, a coercive force energy E_c is expressed by relation (27).

$$E_c = 2M_{s1} \cdot H_{c1} \quad (27)$$

From the temperature dependencies of the saturation magnetization and the coercive force of the reproduction layer, E_c at 155°C depended on the composition of the reproduction layer only to a small extent in this experimental example, and thus were substantially $6 \times 10^4 \text{ erg/cc}$ for any of the compositions.

These energy values are shown in Table 3.

As described before, in order for the mask to be formed in the high-temperature region, relation (22) should be established. Since $E_{wi}=0$, an expression $E_{wb}-E_{leak}-E_{st}-E_c$ for showing whether the recorded magnetic domain of the reproduction layer is contracted and inverted, is shown in Fig. 19 relative to the compositions x of the reproduction layer. According to Fig. 19, when $x \geq 25\%$, relation (28) was to be established so that it was expected that the recorded magnetic domain of the reproduction layer would be contracted and inverted, and thus the rear mask would be formed.

$$E_{wb} - E_{leak} - E_{st} - E_{c1} > 0 \quad (28)$$

On the other hand, when $x \leq 24\%$, relation (29) was to be established so that it was expected that the rear mask would not be formed.

$$E_{wb} - E_{leak} - E_{st} - E_{c1} < 0 \quad (29)$$

Next, the recording/reproduction characteristic was measured using this disc magneto-optical recording medium. The measurement was performed by setting N.A. of an objective lens to be 0.55, a laser beam wavelength to be 780nm, a recording power to be in a range of 7 to 13mW and a reproducing power to be 2.4mW. A linear velocity was set to be 9m/s, and no external magnetic field was applied upon reproduction. First, erasing was performed entirely on the medium, and thereafter, carrier signals of 5.8MHz, 11.3MHz and 15MHz (corresponding to mark lengths 0.78 μ m, 0.40 μ m and 0.30 μ m, respectively) were recorded in the memory layer so as to examine the mark-length dependency of C/N. When the recording of the mark length 0.78 μ m was performed, a C/N ratio of 48dB or more was obtained for all the discs. On the other hand, when the recording of the mark length 0.30 μ m was performed, a C/N ratio of 35dB or more was obtained for the mediums of Experimental Examples 7 to 10, while a C/N ratio of 20dB or more was not obtained for the medium of Comparative Example 4.

C/N ratios at the mark length 0.40 μ m are shown in Fig. 19 relative to the compositions of the reproduction layer, along with the energies. As seen in Fig. 19, when $x \geq 25\%$ in the composition $Gd_x(Fe_{57}Co_{43})_{100-x}$ of the reproduction layer, a C/N ratio was 40dB or more so that good values were obtained. On the other hand, when $x=23\%$, a C/N ratio was deteriorated. When comparing this with the foregoing energy relation, it is appreciated that this matches well the energy calculation results. This reveals that the medium of the present invention satisfying the foregoing energy conditional expressions shows the excellent reproduction characteristic.

(Experimental Example 11)

Next, the foregoing magneto-optical recording medium in which the reproduction layer is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film between room temperature and a Curie temperature, was prepared. First, Si, Gd, Tb, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate having a diameter of 130mm and a polycarbonate substrate with lands and grooves were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-5} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.5Pa, and thereafter, an SiN interference layer of 900Å thickness, a GdFeCo reproduction layer of 400Å thickness, a GdFe intermediate layer of 100Å thickness, a TbFeCo memory layer of 350Å thickness and an SiN protective layer of 700Å thickness were formed in the order named, thus obtaining the magneto-optical recording medium of the present invention with a structure shown in Fig. 14. Upon formation of each SiN dielectric layer, N₂ gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N₂ gases, so as to obtain a refractive index of 2.1.

The composition of the GdFeCo reproduction layer was $Gd_x(Fe_{58}Co_{42})_{100-x}$ and x was set to be 27%. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization M_s1 (emu/cc), and represented M_s1 of 150emu/cc at room temperature, a compensation temperature of 188°C and a Curie temperature of 300°C or more.

The composition of the GdFe intermediate layer was $Gd_{37}Fe_{63}$. A film of this composition was measured alone and represented a saturation magnetization M_s3 of 420emu/cc at room temperature and a Curie temperature of 198°C. In the present medium, GdFe having a small perpendicular magnetic anisotropy and a large saturation magnetization is used for the intermediate layer so that the reproduction layer becomes an in-plane magnetization film around room temperature to a sufficient extent so as to form a front mask.

The composition of the TbFeCo memory layer was $Tb_{20}(Fe_{80}Co_{20})_{80}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization M_s2 , and represented M_s2 of -240emu/cc at room temperature and a Curie temperature of 250°C. The temperature dependency of M_s2 is shown in Fig. 17.

(Experimental Example 12)

Subsequently, using the same apparatus and method as in Experimental Example 11, the magneto-optical recording medium of the present invention having a structure like that in Experimental Example 11 was prepared. The intermediate layer and the memory layer respectively had the same film thicknesses and compositions as those of the intermediate layer and the memory layer in Experimental Example 11. The reproduction layer also had the same film thickness as that in Experimental Example 11, but the composition thereof was changed. Specifically, x was set to be 28% in $Gd_x(Fe_{58}Co_{42})_{100-x}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization Ms1, and represented Ms1 of 200emu/cc at room temperature, a compensation temperature of 205°C and a Curie temperature of 300°C or more.

(Experimental Example 13)

Subsequently, using the same apparatus and method as in Experimental Example 11, the magneto-optical recording medium of the present invention having the same structure as that in Experimental Example 11 except for the composition of the reproduction layer, was prepared. Specifically, in the composition of the reproduction layer, x was set to 29% in $Gd_x(Fe_{58}Co_{42})_{100-x}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization Ms1, and represented Ms1 of 240emu/cc at room temperature, a compensation temperature of 225°C and a Curie temperature of 300°C or more.

(Experimental Example 14)

Subsequently, using the same apparatus and method as in Experimental Example 11, the magneto-optical recording medium of the present invention having the same structure as that in Experimental Example 11 except for the composition of the reproduction layer, was prepared. Specifically, in the composition of the reproduction layer, x was set to 31% in $Gd_x(Fe_{58}Co_{42})_{100-x}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization Ms1, and represented Ms1 of 310emu/cc at room temperature, a compensation temperature of 260°C and a Curie temperature of 300°C or more.

(Comparative Example 5)

Subsequently, using the same apparatus and method as in Experimental Example 11, the magneto-optical recording medium of Comparative Example 5 having a structure like that in Experimental Example 11 was prepared. The intermediate layer and the memory layer respectively had the same film thicknesses and compositions as those of the intermediate layer and the memory layer in Experimental Example 11. The reproduction layer also had the same film thickness as that in Experimental Example 11, but the composition thereof was changed. Specifically, x was set to 25% in $Gd_x(Fe_{58}Co_{42})_{100-x}$. A film of this composition was measured alone to observe the temperature dependency of a saturation magnetization Ms1, and represented Ms1 of 51emu/cc at room temperature, a compensation temperature of 150°C and a Curie temperature of 300°C or more.

(Comparative Example 6)

Subsequently, using the same apparatus and method as in Experimental Example 11, the magneto-optical recording medium of Comparative Example 6 having a structure like that in Experimental Example 11 was prepared. The intermediate layer and the memory layer respectively had the same film thicknesses and compositions as those of the intermediate layer and the memory layer in Experimental Example 11. The reproduction layer also had the same film thickness as that in Experimental Example 11, but the composition thereof was changed. Specifically, x was set to 26% in $Gd_x(Fe_{58}Co_{42})_{100-x}$.

In the state where the magnetic films having the foregoing magnetic characteristics were laminated, a condition of formation of the mask in the high-temperature region when the exchange-coupling force from the memory layer was lost in case of recording the mark length 0.4 μ m, was derived. It is assumed that the reproduction layer and the memory layer lose the exchange-coupling force at about 200°C. Values at this temperature were taken as the materiality values. A Bloch magnetic wall energy σ_{wb} of the reproduction layer, when measured with the reproduction layer in the form of a single layer film, did not depend on the composition thereof in the present experimental example and was about 1.5erg/cc at about 200°C. Further, a saturation magnetization Ms2 of the memory layer was derived to be -180emu/cc. On the other hand, a saturation magnetization Ms1 of the reproduction layer differed depending on the compositions of the reproduction layer and were

derived to be values as shown in Table 4. Using these materiality values, the effective magnetic fields were calculated.

First, by substituting $\sigma_{wb}=1.5\text{erg/cc}$ and $r=0.2\mu\text{m}$ into relation (15), $E_{wb}=7.50 \times 10^4 \text{ erg/cc}$ was obtained. E_{leak} was obtained by using $h_1=30\text{nm}$, $r=0.2\mu\text{m}$ and M_{s1} which was derived corresponding to each of the reproduction layers in the same manner as in Experimental Examples 7 to 10. E_{st} was calculated using $H_{st}=0.15$, M_{s1} and M_{s2} as described before.

From the temperature dependencies of a saturation magnetization and a coercive force of the reproduction layer, a coercive force energy E_c at about 200°C depended on the composition of the reproduction layer only to a small extent in this experimental example, and thus were substantially $6 \times 10^4 \text{ erg/cc}$ for any of the compositions.

These energy values are shown in Table 4.

Further, an expression $E_{wb}-E_{leak}-E_{st}-E_c$ for showing whether the recorded magnetic domain of the reproduction layer is contracted and inverted, is shown in Fig. 20 relative to the compositions x of the reproduction layer. According to Fig. 20, when $x > 26\%$, relation (28) was to be established so that it was expected that the recorded magnetic domain of the reproduction layer would be contracted and inverted, and thus the rear mask would be formed.

$$E_{wb} - E_{leak} - E_{st} - E_c > 0 \quad (28)$$

On the other hand, when $x \leq 26\%$, relation (29) was to be established so that it was expected that the rear mask would not be formed. Thus, it was expected that a C/N ratio would be deteriorated.

$$E_{wb} - E_{leak} - E_{st} - E_c < 0 \quad (29)$$

Next, the recording/reproduction characteristic was measured using this magneto-optical recording medium. The measurement was performed by setting N.A. of an objective lens to be 0.55, a laser beam wavelength to be 780nm , a recording power to be in a range of 7 to 13mW and a reproducing power to be 3.4mW . A linear velocity was set to be 9m/s , and no external magnetic field was applied upon reproduction. First, erasing was performed entirely on the medium, and thereafter, carrier signals of 5.8MHz , 11.3MHz and 15MHz (corresponding to mark lengths $0.78\mu\text{m}$, $0.40\mu\text{m}$ and $0.30\mu\text{m}$, respectively) were recorded in the memory layer so as to examine the mark-length dependency of C/N. When the recording of the mark length $0.78\mu\text{m}$ was performed, a C/N ratio of 48dB or more was obtained for all the discs. On the other hand, when the recording of the mark length $0.30\mu\text{m}$ was performed, a C/N ratio of 35dB or more was obtained for the mediums of the present invention in Experimental Examples 11 to 14, while a C/N ratio of 25dB or more was not obtained for the mediums of Comparative Examples 5 and 6.

C/N ratios at the mark length $0.40\mu\text{m}$ are shown in Fig. 20 relative to the compositions of the reproduction layer. As seen in Fig. 20, when $x > 26\%$ in the composition $\text{Gd}_x(\text{Fe}_{58}\text{Co}_{42})_{100-x}$ of the reproduction layer, a C/N ratio was 40dB or more so that good values were obtained. On the other hand, when $x=25\%$, 26% , a C/N ratio was deteriorated. When comparing this with the foregoing energy relation, it is appreciated that this matches well the energy calculation results. This reveals that the medium of the present invention satisfying the foregoing energy conditional expressions shows the excellent reproduction characteristic. On the other hand, with regard to a disc with $x=26\%$, since a deviation relative to the condition of formation of the rear mask is relatively small, good C/N ratios have been obtained as compared with the conventional medium which is not the super-resolution medium. However, in order to obtain the sufficiently high C/N ratio, the condition of the present invention is necessary. Further, with $x=31\%$, although the condition of formation of the rear mask was satisfied in terms of the energy expression, a C/N ratio was somewhat deteriorated as being 40dB or less. By measuring a Kerr loop (a loop obtained by plotting Kerr rotation angles of a sample relative to a magnetic field applied in perpendicular to a film thickness direction; measured with a laser beam of 780nm) under irradiation of light from a side of the reproduction layer with respect to a disc with $x=31\%$ by increasing a temperature from room temperature, it has been clarified that the reproduction layer did not become a perpendicular magnetization film to a sufficient extent before the temperature increases to reach the Curie temperature of the intermediate layer. Thus, it has been found out that the deterioration of C/N was caused due to the fact that a condition necessary for the medium of the present invention other than the energy relation, that is, a condition that the reproduction layer should be a magnetic layer which becomes a perpendicular magnetization film at least before the intermediate layer reaches the Curie temperature, was not satisfied.

(Experimental Example 15)

Finally, consideration has been made from various aspects with respect to the characteristic of the magneto-optical recording medium of the present invention, which will be shown in Experimental Example 15 and Comparative Examples 7 and 8.

Si, Gd, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate

having a diameter of 130mm and a polycarbonate substrate with lands and grooves at a pitch of 1.6μm were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-5} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.4Pa, and thereafter, an SiN interference layer of 900Å thickness, a $Gd_{28}(Fe_{60}Co_{40})_{72}$ reproduction layer of 400Å thickness, a $Gd_{37}Fe_{63}$ intermediate layer of 100Å thickness, a $Tb_{20}(Fe_{80}Co_{20})_{80}$ memory layer of 300Å thickness and an SiN protective layer of 700Å thickness were formed in the order named, thus obtaining the magneto-optical recording medium of the present invention with a structure shown in Fig. 14. This medium is of a double-mask type in which a rear mask and a front mask are formed. Upon formation of each SiN dielectric layer, N₂ gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N₂ gases, so as to obtain a refractive index of 2.1. The $Gd_{28}(Fe_{60}Co_{40})_{72}$ reproduction layer was rare earth element sublattice magnetization dominant at room temperature, and was set to represent a saturation magnetization Ms1 of 180emu/cc, a compensation temperature Tcomp1 of 215°C and a Curie temperature Tc1 of 300°C or more. The $Gd_{37}Fe_{63}$ intermediate layer was rare earth element sublattice magnetization dominant at room temperature, and was set to represent a saturation magnetization Ms3 of 450emu/cc and a Curie temperature Tc3 of 190°C. The $Tb_{20}(Fe_{80}Co_{20})_{80}$ memory layer was iron family element lattice magnetization dominant, and was set to represent a saturation magnetization Ms2 of -240emu/cc and a Curie temperature Tc2 of 250°C.

The energy calculation was performed with respect to this medium as in the foregoing experimental examples, and Ewb-Eleak-Est-Ec1= 1×10^5 erg/cc was obtained. Accordingly, the calculation result showed formation of the rear mask.

After recording a magnetic domain of a 0.78μm mark length in the magneto-optical recording medium, the magnetic domain was observed by a polarizing microscope under irradiation of a semiconductor laser beam of 830nm. While increasing the laser power, it was confirmed that the recorded magnetic domain was contracted and the magnetization was oriented in an erasing direction at the center (high-temperature region) of the light spot at a certain laser power.

Subsequently, the recording/reproduction characteristic was measured using this magneto-optical recording medium. The measurement was performed by setting N.A. of an objective lens to be 0.53, a laser beam wavelength to be 780nm (using an optical head), a linear velocity to be 9m/s and a recording power to be 10mW. First, erasing was performed entirely on the medium, and thereafter, a mark of 0.40μm length was recorded by modulating a laser beam at a frequency of 11.3MHz. Subsequently, a variation of C/N ratios were measured by changing a reproducing power from 0.8mW to 4.4mW. The results are shown in Fig. 21.

In the magneto-optical recording medium of the present invention, since a temperature of the medium does not increase sufficiently while the reproducing power is 1.0mW or less, magnetization of the reproduction layer is oriented substantially in a film plane. Accordingly, since the mark recorded in the memory layer is masked by the reproduction layer, substantially no C/N ratio is obtained. On the other hand, when the reproducing power is increased to about 2.0mW to 2.8mW, a medium-temperature region, that is, an aperture region, is formed within the reproducing spot to transfer the magnetic domain of the memory layer to the reproduction layer so that the C/N ratio is increased. A configuration of the aperture region at this time is substantially the same as in the super resolution of the conventional two-layered structure using the in-plane film. Accordingly, although the super-resolution phenomenon is generated, since size and location of the aperture region is not optimum, only about 36dB can be obtained as a C/N ratio. When the reproducing power is further increased to 3.2mW to 4.0mW, a portion appears within the spot where the intermediate layer reaches the Curie temperature, that is, a rear mask is formed. Then, as shown in Fig. 5A, the aperture configuration becomes optimum relative to the spot so that a C/N ratio of 45dB is obtained. On the other hand, when the reproducing power exceeds 4.0mW, the highest temperature exceeds the Curie temperature of the memory layer so that the recorded data are damaged to reduce the C/N ratio.

Next, amplitudes and DC levels of the reproduced signal were measured for further supporting the formation of the rear mask in the magneto-optical recording medium of the present invention. In case of the recorded mark length being 0.4μm, when the reproducing power exceeds 3mW, a carrier level is rapidly increased so that the formation of the rear mask can be confirmed.

The amplitudes and DC levels were obtained from the reproduced signal for the 0.8μm marks recorded in the same medium. The DC level takes a positive sign at an erasing side. In case of the conventional optical disc, an aperture configuration does not change even when the reproducing power is changed. Accordingly, when the reproducing power is within a range which does not cause the memory layer to reach the Curie temperature, a relationship between the amplitude of the reproduced signal and the reproducing power forms a straight line passing the origin. Further, the mark is not recorded over the full width of the spot light so that erased-state portions remain at both sides of the mark. Accordingly, even when the marks are recorded with

a duty cycle of 50%, the DC level of the reproduced signal does not become 0, but offsets to the erasing side. Thus, each of relationships of both the amplitude and the DC level relative to the reproducing power forms a straight line with a positive slope passing through the origin. Alternatively, when reduction in the Kerr rotation angles of the reproduction layer due to the power increase is at a level which can not be ignored, a curve is formed which is slightly convex upward depending on such a level. On the other hand, in case of the super-resolution disc of the present invention, a straight line does not pass the origin, and further, its slope is changed around the reproducing power of 3mW. This is considered as follows:

When the reproducing power is 0.5mW or less, even the highest-temperature portion does not reach a temperature where the reproduction layer transits from an in-plane magnetization film to a perpendicular magnetization film. Accordingly, the magnetization of the reproduction layer is in plane, that is, masked, in all the regions within the spot. Thus, the amplitude and the DC level are both 0. On the other hand, when the reproducing power exceeds 0.5mW, a part of the reproduction layer within the spot becomes a perpendicular magnetization film. When the power is further increased, since the aperture region expands, both the amplitude and the DC level are rapidly increased with a slope exceeding a proportional relationship with the reproducing power. However, when the reproducing power exceeds 3mW, the rear mask starts to be formed within the spot so that a direction of the magnetization aligns in the erasing direction in the rear-masked portion. This portion worked for the signal reproduction before appearance of the rear mask, but does not work for the signal reproduction as being masked in the erasing direction when the rear mask appears. Accordingly, across the reproducing power of 3mW, the DC level is rapidly increased in the erasing direction, while the amplitude of the reproduced signal is reduced. From the foregoing results, the behavior of the rear mask in the super-resolution disc of the present invention has been supported.

Further, in order to confirm that the super-resolution effect of the present invention is generated without applying the reproducing magnetic field from the external, the results of examination about dependency upon the reproducing magnetic field are shown in Fig. 22. Fig. 22 was obtained in the following manner. After the 0.4mm marks were recorded on the disc as in the foregoing manner, the reproducing magnetic field was changed while performing the signal reproduction with the reproducing power of 3.2mW, and a variation of C/N ratios at that time was plotted. As clear from this figure, the C/N ratio of 45dB was stably obtained in a range of the reproducing magnetic field ± 200 Oe.

Subsequently, crosstalk with the adjacent track (hereinafter referred to as "crosstalk") was measured. First, erasing was performed entirely on the lands and the grooves, and thereafter, a signal of a $0.78\mu\text{m}$ mark length was recorded on the land as in the foregoing manner so as to measure a carrier level CL. Subsequently, a carrier level CG upon tracking the adjacent groove was measured. The crosstalk was represented by a ratio CL/CG. Since the experiment was performed on the assumption that data were recorded on both the land and groove, an effective track pitch was $0.8\mu\text{m}$. The results are shown in Fig. 23. As clear from the figure, the crosstalk was suppressed to about -28dB in a range of the reproducing power of 3.2mW to 4.0mW, which range was optimum for the medium.

Although not shown in Fig. 23, the crosstalk measurement was performed in the same manner with respect to the medium of Experimental Example 13, wherein the crosstalk values in a range between -32dB and -35dB were obtained relative to a range of the reproducing power of 2.5mW to 4.0mW.

The foregoing data were all obtained without applying the initializing magnetic field, and the excellent results were obtained for the marks recorded at high density using an information recording/reproduction device like the conventional information recording/reproduction device.

Next, experiments were performed with respect to the conventionally known medium structure in the same manner as before and comparison was made with the medium of the present invention.

(Comparative Example 7)

Using the same apparatus and method as in Experimental Example 15, an SiN interference layer of 900\AA thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 800\AA thickness and an SiN protective layer of 700\AA thickness were formed on a polycarbonate substrate in the order named. In other words, a single layer disc having, as a magnetic layer, only the memory layer used in Experimental Example 15 was prepared. First, the marks of various sizes were recorded on the medium, and C/N ratios were measured as in Experimental Example 15. The reproducing power was set to be in a range from 2.0mW to 3.8mW so as to obtain the highest C/N ratio. As a result, although the sufficiently high C/N ratio was obtained when the mark length was large, i.e. $0.78\mu\text{m}$, the resolution was rapidly reduced when the mark length was short, i.e. close to a cut-off frequency of the optical system, so that the C/N ratio of only 26dB was obtained when the mark length was $0.40\mu\text{m}$.

Further, in the measurement of the crosstalk, since the effective track pitch of $0.8\mu\text{m}$ was narrow relative to the reproducing spot, and further, no mask effect was provided in case of the single layer disc, the crosstalk

of only about -22dB was obtained as shown in Fig. 23.

(Comparative Example 8)

5 Using the same apparatus and method as in Experimental Example 15, an SiN interference layer of 900Å thickness, a $\text{Gd}_{28}(\text{Fe}_{80}\text{Co}_{40})_{72}$ reproduction layer of 700Å thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 300Å thickness and an SiN protective layer of 700Å thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium of Comparative Example 8.

10 First, the marks of 0.40μm mark length were recorded on the medium, and reproducing power dependencies of carrier and noise were measured. Since even the medium of this comparative example provides the super-resolution effect by using an in-plane magnetization film at low temperatures, a carrier level was increased, as in the medium of the present invention in Experimental Example 15, in a range of the reproducing power between 0.8mW and 2.8mW. However, in the two-layered super-resolution medium of this comparative example, since a rear mask does not appear even when the reproducing power is increased to 3mW or more, 15 the rapid carrier increase as in the medium of the present invention in Experimental Example 15 was not observed. In the medium of this comparative example, the C/N ratio of only 37dB was obtained at maximum in case of the mark length being 0.40μm.

20 Next, the marks of various sizes were recorded on the medium of this comparative example, and the spatial frequency characteristic was measured. The results were such that, although the resolution was increased at high-frequency regions as compared with the single layer disc, since no rear mask effect was provided and a positional relationship between the aperture region and the spot was not optimum, the resolution was inferior as compared with the disc of Experimental Example 15.

25 Further, with regard to the crosstalk, the crosstalk of about -30dB equivalent to that of the medium of the present invention in Experimental Example 15, was obtained. However, in a range of the reproducing power between 2.0mW and 4.0mW, the crosstalk in this comparative example was deteriorated by about 2dB to 3dB as compared with the medium of the present invention in Experimental Example 13.

30

35

40

45

50

55

Table 1

	Reproduction Layer				
	Composition at %	Film Thick- ness Å	Ms emu/cc	Tcomp °C	Tc °C
Experimental Example 1	Gd ₃₀ (Fe ₆₅ Co ₃₅) ₇₀	400	196	240	300<
Experimental Example 2	Gd ₂₈ (Fe ₆₅ Co ₃₅) ₇₂	400	160	180	300<
Experimental Example 3	Gd ₂₈ (Fe ₆₀ Co ₄₀) ₇₂	400	160	205	300<
Experimental Example 4	Gd ₂₇ (Fe ₅₇ Co ₄₃) ₇₃	450	170	190	300<
Experimental Example 5	Gd ₃₀ (Fe ₆₂ Co ₃₈) ₇₀	380	280	290	300<
Experimental Example 6	Gd ₂₉ (Fe ₆₅ Co ₃₅) ₇₁	430	250	260	300<
Comparative Example 1	Gd ₂₀ (Fe ₇₅ Co ₂₅) ₈₀	300	-180	-	300<
Comparative Example 2	Gd ₂₁ (Fe ₇₅ Co ₂₅) ₇₉	300	-160	-	300<
Comparative Example 3	Gd ₃₀ (Fe ₆₀ Co ₄₀) ₇₀	400	180	240	300<

(Ms in positive represents RE rich, and in negative TM rich.)

Table 1 (Continued)

	Intermediate Layer				
	Composition at %	Film Thick- ness • Å	Ms emu/cc	Tcomp ° C	Tc ° C
Experimental Example 1	Tb ₁₈ (Fe ₉₇ Co ₃) ₈₂	50	95	-	135
Experimental Example 2	Dy ₂₀ (Fe ₉₇ Co ₃) ₈₀	60	80	-	128
Experimental Example 3	Gd ₄₀ Fe ₆₀	100	475	-	190
Experimental Example 4	Gd ₄₃ Fe ₅₅	80	540	-	165
Experimental Example 5	Gd ₃₇ Fe ₆₃	120	420	-	195
Experimental Example 6	Gd ₄₂ (Fe ₉₅ Co ₅) ₉₈	130	480	-	176
Comparative Example 1	Tb ₁₈ (Fe ₉₀ Co ₅ Al ₅) ₈₂	100	-160	-	140
Comparative Example 2	Tb ₁₈ (Fe ₉₀ Co ₅ Al ₅) ₈₂	100	-160	-	140
Comparative Example 3					

(Ms in positive represents RE rich, and in negative TM rich.)

Table 1 (Continued)

	Auxiliary Layer				
	Composition at %	Film Thick- ness ° Å	Ms emu/cc	Tcomp °C	Tc °C
Experimental Example 1					
Experimental Example 2					
Experimental Example 3					
Experimental Example 4					
Experimental Example 5					
Experimental Example 6					
Comparative Example 1					
Comparative Example 2	$\text{Gd}_{22}(\text{Fe}_{60}\text{Co}_{40})_{78}$	160	-160	-	280
Comparative Example 3					

(Ms in positive represents RE rich, and in negative TM rich.)

Table 1 (Continued)

	Memory Layer				
	Composition at %	Memory Layer ° Å	MS emu/cc	Tcomp °C	Tc °C
Experimental Example 1	Tb ₁₈ (Fe ₈₄ Co ₁₂) ₈₂	350	120	-	220
Experimental Example 2	Tb ₁₈ (Fe ₈₄ Co ₁₂) ₈₂	350	120	-	220
Experimental Example 3	Tb ₂₀ (Fe ₈₀ Co ₂₀) ₈₀	300	-150	-	260
Experimental Example 4	Tb ₂₂ (Fe ₈₀ Co ₂₀) ₇₈	320	-50	-	240
Experimental Example 5	Tb ₁₈ (Fe ₈₄ Co ₁₆) ₈₂	300	-200	-	220
Experimental Example 6	Tb ₂₀ (Fe ₈₀ Co ₂₀) ₈₀	350	-240	-	270
Comparative Example 1	Tb ₁₈ (Fe ₈₀ Co ₂₀) ₈₂	400	-150	-	250
Comparative Example 2	Tb ₁₈ (Fe ₈₀ Co ₂₀) ₈₂	400	-150	-	250
Comparative Example 3	Tb ₂₀ (Fe ₈₀ Co ₂₀) ₈₀	400	-150	-	250

Table 1 (Continued)

	Initializing Magnetic Field	Reproducing Magnetic Field
	Oe	Oe
Experimental Example 1	0	0
Experimental Example 2	0	0
Experimental Example 3	0	0
Experimental Example 4	0	0
Experimental Example 5	0	0
Experimental Example 6	0	0
Comparative Example 1	0	0
	0	200
	0	400
Comparative Example 2	0	0
	1000	400
	2000	400
	3000	200
	3000	400
Comparative Example 3	0	0

Table 1 (Continued)

	C/N			Crosstalk
	0.78 μ m	0.40 μ m	0.30 μ m	0.78 μ m
	dB	dB	dB	dB
Experimental Example 1	48	45	36	-20
Experimental Example 2	48	44	35	-21
Experimental Example 3	49	43	36	-39
Experimental Example 4	49	43	35	-38
Experimental Example 5	48	45	35	-37
Experimental Example 6	49	44	36	-39
Comparative Example 1	48	18	5	-12
	48	30	18	-13
	48	45	36	-19
Comparative Example 2	48	21	2	-15
	48	26	8	-17
	48	29	13	-19
	48	30	20	19
	48	45	34	-39
Comparative Example 3	48	35	20	-34

Table 2

	Experimental Example 7	Experimental Example 8	Experimental Example 9	Experimental Example 10	Comparative Example 4
Gd content (at.%)	25	26	28	31	23
Hs1 (emu/cc)	-10	17	70	133	-72
Ms2 (emu/cc)	-225	-225	-225	-225	-225
E _{vb} (erg/cc)	9.50E+04	9.50E+04	9.50E+04	9.50E+04	9.50E+04
E _{leak} (erg/cc)	2.28E+02	6.60E+02	1.12E+04	4.40E+04	1.18E+04
E _{st} (erg/cc)	8.48E+03	-1.44E+04	-5.93E+04	-1.13E+05	6.10E+04
E _c (erg/cc)	6.00E+04	6.00E+04	6.00E+04	6.00E+04	6.00E+04
E _{vb} -E _{leak} -E _{st} - E _c (erg/cc)	2.63E+04	4.88E+04	8.32E+04	1.07E+05	-3.79E+04

E+x represents 10^{+x}

Table 3

	Experimental Example 11	Experimental Example 12	Experimental Example 13	Experimental Example 14	Comparative Example 5	Comparative Example 6
Gd content (at.%)	27	28	29	31	25	26
Ms1 (emu/cc)	-10	10	30	70	-66	-32
Ms2 (emu/cc)	-180	-180	-180	-180	-180	-180
E _{vb} (erg/cc)	7.50E+04	7.50E+04	7.50E+04	7.50E+04	7.50E+04	7.50E+04
E _{leak} (erg/cc)	2.28E+02	2.28E+02	2.06E+03	1.12E+04	9.95E+03	2.34E+03
E _{st} (erg/cc)	6.78E+03	-6.78E+03	-2.03E+04	-4.75E+04	4.48E+04	2.17E+04
E _c (erg/cc)	5.50E+04	5.50E+04	5.50E+04	5.50E+04	5.50E+04	5.50E+04
E _{vb} -E _{leak} -E _{st} - E _c (erg/cc)	1.30E+04	2.66E+04	3.83E+04	5.63E+04	-3.47E+04	-4.04E+04

E+x represents 10^{+x}

(Second Embodiment)

When a magnetic layer showing an in-plane magnetic anisotropy at room temperature is used as the reproduction layer in the medium of the first embodiment, a magneto-optical recording medium should be designed in consideration of not only the optical effect but also the magnetic behavior of each of the magnetic

layers at room temperature and a reproducing temperature, for obtaining the excellent mask effect.

In the second embodiment, the medium, which has been considered in that aspect, will be described.

Hereinbelow, a magneto-optical recording medium according to the second preferred embodiment of the present invention and an information reproducing method using the medium will be described in detail hereinbelow with reference to the accompanying drawings.

The magneto-optical recording medium of the present invention has at least three magnetic layers, that is, a first magnetic layer being a perpendicular magnetization film, a third magnetic layer having a Curie temperature lower than those of the first magnetic layer and a second magnetic layer, and the second magnetic layer being a perpendicular magnetization film (Fig. 24). Hereinbelow, the first magnetic layer will be referred to as a reproduction layer, the second magnetic layer as a memory layer and the third magnetic layer as an intermediate layer.

The memory layer 113 is a layer for storing recorded information and thus is required to stably hold the magnetic domains. As a material of the memory layer, a material which has a large perpendicular magnetic anisotropy and can stably hold a magnetization state, for example, a rare earth-iron family amorphous alloy, such as, TbFeCo, DyFeCo, TbDyFeCo or the like, garnet, a platinum family-iron family periodic structure film, such as, Pt/Co, Pd/Co or the like, or a platinum family-iron family alloy, such as, PtCo, PdCo or the like is preferable.

It is necessary that a film thickness of the memory layer 113 is 10nm or greater for stably holding the magnetic domains. Practically, the total film thickness of the three magnetic layers, i.e. the memory layer 113, the reproduction layer 111 and the intermediate layer 112, is preferably smaller for reducing the recording power, and thus the film thickness of the memory layer is preferably 50nm or less.

The reproduction layer 111 is a layer for reproducing magnetization information held in the memory layer 113. The reproduction layer 111 has a magnetization characteristic such that it is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film at a given temperature or higher between room temperature and its Curie temperature. The reproduction layer 111 is located closer to a light incident side as compared with the intermediate layer 112 and the memory layer 113, and its Curie temperature is set to be higher than at least those of the intermediate layer 112 and the memory layer 113 for preventing deterioration of a Kerr rotation angle upon reproduction.

As a material of the reproduction layer 111, a rare earth-iron family amorphous alloy, for example, a material mainly containing GdFeCo, is preferable. Tb, Dy or the like may be added. Further, rare earth light metal, such as, Nd, Pr, Sm or the like may be added for preventing deterioration of the Kerr rotation angle at shorter wavelength. Preferably, the reproduction layer has a small magnetic anisotropy, and a compensation temperature between room temperature and the Curie temperature. This compensation temperature is set to be near a Curie temperature of the intermediate layer 112, specifically, in a range of -50°C to 100°C relative to the Curie temperature of the intermediate layer 112, and preferably, in a range of -20°C to +80°C relative to the Curie temperature of the intermediate layer 112, which will be described later.

In the magneto-optical recording medium of the present invention, a film thickness of the reproduction layer 111 is selected to be 20nm or greater. In the magneto-optical recording medium of the present invention, since the memory layer 113 shows a perpendicular magnetic anisotropy at room temperature and each of the reproduction layer 111 and the intermediate layer 112 shows an in-plane magnetic anisotropy at room temperature, an interface magnetic wall is formed between the memory layer 113 and the reproduction and intermediate layers 111 and 112. Since a material having a large perpendicular magnetic anisotropy is used for the memory layer 113, most of the interface magnetic wall is formed at a side of the intermediate and reproduction layers 112 and 111. Accordingly, even if the composition is the same, when the reproduction layer 111 is thin, the magnetic wall permeates through the intermediate layer 112 to extend to a surface of the reproduction layer 111 at the light incident side at room temperature, as shown in Fig. 25A. Thus, the mask effect becomes insufficient to reduce a C/N ratio. In view of this, the film thickness of the reproduction layer 111 is required to be 20nm or greater.

To the contrary, when the reproduction layer 111 is too thick, as shown in Fig. 25B, since the exchange-coupling force of the memory layer 113 does not reach the light incident side surface of the reproduction layer 111, the magnetization is not oriented in a perpendicular direction even at a temperature caused by the reproducing power so that a level of a reproduced signal is reduced. In view of this, the film thickness of the reproduction layer 111 is required to be 100nm or less.

Further, the film thickness of the reproduction layer 111 influences a temperature distribution of the medium and a mask effect at a low-temperature region. Crosstalk with the adjacent track also changes depending on the film thickness. Preferably, the film thickness of the reproduction layer 111 is selected to be no less than 25nm and no more than 50nm so that the medium becomes effective for narrowing the track pitch.

The intermediate layer 112 is provided mainly for partly mediating and partly cutting off the exchange-cou-

pling force from the memory layer 113 to the reproduction layer 111. The intermediate layer 112 has a magnetization characteristic such that it is an in-plane magnetic film at room temperature and becomes a perpendicular magnetization film at a given temperature or higher between room temperature and its Curie temperature. The intermediate layer 112 is located between the reproduction layer 111 and the memory layer 113 and has a Curie temperature which is set to be higher than room temperature and lower than those of the reproduction layer 111 and the memory layer 113. The Curie temperature of the intermediate layer 112 is set to be high enough to mediate the exchange-coupling force from the memory layer 113 to the reproduction layer 111 at a low-temperature portion and a medium-temperature portion within the light spot, but low enough to cut off the exchange-coupling force at a highest-temperature portion within the light spot, and thus preferably, 100°C or higher and 220°C or lower, and more preferably, 120°C or higher and 180°C or lower. As a material of the intermediate layer 112, for example, a rare earth-iron family amorphous alloy, such as, GdFeCo, GdCo, GdTbFeCo, GdDyFeCo, TbFeCo, DyFeCo, TbDyFeCo or the like is preferable. A non-magnetic element, such as, Cr, Al, Si, Cu or the like may be added for lowering the Curie temperature.

In the magneto-optical recording medium of the present invention, a film thickness of the intermediate layer 112 is selected to be no less than 3nm and no more than 30nm. When the film thickness of the intermediate layer 112 is smaller than 3nm, the stability of the magnetic characteristic of the magnetic film is deteriorated or the intrinsic magnetic characteristic can not be achieved due to manufacturing disuniformity. Further, there is a problem that, even when the intermediate layer reaches the Curie temperature with a pin hole being generated, the exchange coupling between the reproduction layer 111 and the memory layer 113 is not cut off.

Further, when the film thickness of the intermediate layer 112 is small, as shown in Fig. 26A, of the magnetic wall formed in the intermediate layer 112 and the reproduction layer 111 at room temperature, a rate is increased which permeates the reproduction layer 111 so that the mask effect at the reproduction layer 111 becomes incomplete. In view of this, the film thickness of the intermediate layer 112 should be selected to be 3nm or greater.

On the other hand, since a saturation magnetization M_s of the intermediate layer 112 is greater than that of the reproduction layer 111, when the film thickness of the intermediate layer 112 is large, as shown in Fig. 26B, the intermediate layer 112 can not mediate the exchange-coupling force from the memory layer 113 to the reproduction layer 111 at a medium-temperature portion so that transfer of the magnetization to the reproduction layer 111 becomes incomplete even at a temperature caused by the reproducing power. Thus, a level of the reproduced signal is reduced. In view of this, the film thickness of the intermediate layer 112 is required to be 30nm or less.

The film thickness of the intermediate layer 112 influences the mask condition at a low-temperature region, that is, a temperature region where the reproduction layer 111 has the in-plane anisotropy, and thus also influences the crosstalk with the adjacent track. Preferably, the film thickness of the intermediate layer 112 is selected to be no less than 5nm and no more than 20nm so that the medium becomes effective for narrowing the track pitch.

An element, such as, Al, Ti, Pt, Nb, Cr or the like may be added to the reproduction layer 111, the intermediate layer 112 and the memory layer 113 for improving their corrosion resistances. For enhancing the interference effect and the protective performance, a dielectric layer formed of SiN_x , AlO_x , TaO_x , SiO_x or the like may be provided in addition to the foregoing reproduction, intermediate and memory layers. Further, for improving thermal conductivity, a layer formed of Al, AlTa, AlTi, TiCr, Cu or the like and having good thermal conductivity may be provided. Further, an initialization layer in which magnetization is aligned in one direction for performing the optical modulation overwrite may be provided. Further, auxiliary layers for recording assistance and reproducing assistance may be provided to adjust the exchange-coupling force or the magnetostatic coupling force. Moreover, a protective coat formed of the foregoing dielectric layer or a polymer resin may be added as a protective film.

Since the recording and reproduction of the data signal relative to the medium in the second embodiment is the same as in the first embodiment, explanation thereof will be omitted for brevity.

(Experimental Example 15)

Si, Gd, Tb, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate having a diameter of 130mm and a polycarbonate substrate with lands and grooves were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-5} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.4Pa, and thereafter, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 20nm thickness, a GdFe intermediate layer of 10nm thickness, a TbFeCo memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed in the

order named, thus obtaining the medium with a structure shown in Fig. 24. Upon formation of each SiN dielectric layer, N₂ gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N₂ gases, so as to obtain a refractive index of 2.1.

The composition of the GdFeCo reproduction layer was Gd₂₈(Fe₈₀Co₄₀)₇₂ and represented RE rich at room temperature, a saturation magnetization Ms of 222emu/cc, a compensation temperature of 215°C and a Curie temperature of 300°C or more.

The composition of the GdFe intermediate layer was Gd₄₀Fe₆₀ and represented TM rich at room temperature, a saturation magnetization Ms of 420emu/cc and a Curie temperature of 190°C.

The composition of the TbFeCo memory layer was Tb₂₀(Fe₈₀Co₂₀)₈₀ and represented TM rich at room temperature, a saturation magnetization Ms of 200emu/cc and a Curie temperature of 270°C.

The recording/reproduction characteristic was measured using this magneto-optical recording medium. The measurement was performed by setting N.A. of an objective lens to be 0.55, a laser beam wavelength to be 780nm, a recording power to be in a range of 7 to 15mW and a reproducing power to be in a range of 2.5 to 4.0mW, so as to provide the highest C/N ratio. A linear velocity was set to be 9m/s. First, erasing was performed entirely on the medium, and thereafter, a carrier signal of 11.3MHz (corresponding to a mark length 0.40μm) was recorded in the memory layer so as to examine the C/N ratios.

Subsequently, crosstalk with the adjacent track (hereinafter referred to as "crosstalk") was measured. The measurement was performed by setting N.A. of an objective lens to be 0.55, a laser beam wavelength to be 780nm, a recording power to be in a range of 7 to 15mW and a linear velocity to be 9m/s. First, erasing was performed entirely on the lands and the grooves of the medium, and thereafter, a carrier signal of 5.8MHz (corresponding to a mark length 0.78μm) was recorded on the memory layer so as to measure a carrier CL. Subsequently, a carrier CG upon tracking the adjacent groove was measured. The crosstalk was represented by a difference CL-CG. Since the experiment was performed on the assumption that data were recorded on both the land and groove, an effective track pitch was 0.8μm. The measurement results of the C/N ratios under the optimum condition and the crosstalks at the same reproducing power are shown in Table 4.

(Experimental Examples 16 to 22)

The magneto-optical recording mediums were prepared with the same structure and materials as those in Experimental Example 15 except for the film thickness of the reproduction layer as the first magnetic layer. The film thicknesses of the respective reproduction layers in Experimental Examples 16 to 22 are shown in Table 4. The C/N ratios under the optimum condition and the crosstalks at the same reproducing power were measured in the same manner as in Experimental Example 15. The measurement results are shown in Table 4.

(Comparative Examples 7 to 9)

As shown in Table 5, the magneto-optical recording mediums were prepared with the same structure and materials as those in Experimental Example 15 except for the film thickness of the reproduction layer as the first magnetic layer. A signal corresponding to the mark length 0.4μm was recorded, and the C/N ratios were measured. The measurement results are shown in Table 5.

Fig. 27 is a graph showing the measurement results of Experimental Examples 15 to 22 and Comparative Examples 7 to 9 in terms of the C/N ratios relative to the film thicknesses of the reproduction layer. A C/N ratio of 43dB or more was obtained in a range of the film thickness of the reproduction layer no less than 20nm and no more than 100nm. Further, the crosstalk was suppressed to -30dB or less in a range of the film thickness of the reproduction layer no less than 25nm and no more than 50nm. Accordingly, by using the present invention, the C/N ratio sufficiently high for the excellent information reproduction was obtained. Further, by selecting the film thickness of the reproduction layer to be no less than 25nm and no more than 50nm, the track density can be improved in addition to the line recording density.

(Experimental Examples 23 to 30)

Using the same apparatus and method as in Experimental Example 15, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 40nm thickness, a GdFe intermediate layer, a TbFeCo memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed in the order named, thus obtaining the medium with a structure shown in Fig. 24. The film thicknesses of the respective intermediate layers in Experimental Examples 23 to 30 are shown in Table 6. With regard to these mediums of the present invention, a carrier signal of 11.3MHz (corresponding to a mark length 0.40μm) was recorded, and the C/N ratios were

measured, in the same manner as in Experimental Example 15. The measurement results are shown in Table 6. A C/N ratio of 40dB or more was obtained in a range of the film thickness of the intermediate layer no less than 3nm and no more than 30nm. Accordingly, the excellent information reproduction can be expected.

The crosstalk was suppressed to -30dB or less in a range of the film thickness of the intermediate layer no less than 5nm and no more than 20nm. This shows that optimization of the film thickness of the intermediate layer is also effective for narrowing the track pitch.

(Comparative Examples 10, 11)

Using the same apparatus and method as in Experimental Examples 23 to 30, the magneto-optical recording mediums were prepared with the same structure and materials as those in Experimental Examples 23 to 30 except for the film thickness of the intermediate layer. The film thicknesses of the respective intermediate layers are shown in Table 7. The C/N ratios and crosstalks were measured in the same manner as in Experimental Examples 23 to 30. The measurement results are shown in Table 7.

Fig. 29 is a graph showing the measurement results of Experimental Examples 23 to 30 and Comparative Examples 10 and 11 in terms of the C/N ratios relative to the film thicknesses of the intermediate layer, and Fig. 30 is a graph showing the measurement results of Experimental Examples 23 to 30 and Comparative Examples 10 and 11 in terms of the crosstalks relative to the film thicknesses of the intermediate layer. A C/N ratio of 40dB or more was obtained in a range of the film thickness of the intermediate layer no less than 3nm and no more than 30nm. Further, a C/N ratio reaches 43dB in a range of no less than 5nm and no more than 30nm. For improving not only the line recording density but also the track density, the film thickness of the intermediate layer is preferably selected to be no less than 5nm and no more than 20nm where the crosstalk is suppressed to -30dB.

Table 4

	Film Thickness of Reproduction Layer (nm)	Recording Power (mW)	C/N (dB)	Crosstalk (dB)
Experimental Example 15	20	11	43.2	-26.3
Experimental Example 16	25	11.5	45.5	-30.4
Experimental Example 17	30	11.5	45.7	-31.1
Experimental Example 18	40	12	45.8	-32.2
Experimental Example 19	50	12	45.4	-30.7
Experimental Example 20	60	12.5	44.6	-28.5
Experimental Example 21	80	13	44	-27.6
Experimental Example 22	100	14	43.2	-25

Table 5

	Film Thickness of Reproduction Layer (nm)	Recording Power (mW)	C/N (dB)	Crosstalk (dB)
Experimental Example 7	10	11	34.5	-22.5
Experimental Example 8	15	11	35.5	-23
Experimental Example 9	120	15	40	-23.4

Table 6

	Film Thickness of Intermediate Layer (nm)	Recording Power (mW)	C/N (dB)	Crosstalk (dB)
Experimental Example 23	3	12	40.5	-22.9
Experimental Example 24	4	12	42	-25.6
Experimental Example 25	5	12	43.6	-30.6
Experimental Example 26	7	12	45.5	-31.1
Experimental Example 27	10	12	45.8	-32.2
Experimental Example 28	15	12	45.7	-31.5
Experimental Example 29	20	12.5	44	-30.5
Experimental Example 30	30	12.5	43	-27.3

Table 7

	Film Thickness of Intermediate Layer (nm)	Recording Power (mW)	C/N (dB)	Crosstalk (dB)
Comparative Example 10	2	12	37.5	-22.2
Comparative Example 11	40	13	35	-21

(Third Embodiment)

In a third embodiment, the optimum compositions of the reproduction layer and the intermediate layer for obtaining the excellent mask effect will be described, wherein a magnetic layer showing an in-plane magnetic anisotropy at room temperature is used as the reproduction layer in the medium of the first embodiment.

Hereinbelow, the third embodiment of the present invention will be described in detail with reference to the drawings.

Fig. 31 shows a sectional view of an optical disc in the third embodiment. As shown in Fig. 31, in the optical disc used in this embodiment, an interference layer 214, a first magnetic layer (hereinafter referred to as "reproduction layer") 211, a third magnetic layer (hereinafter referred to as "intermediate layer") 212, a second magnetic layer (hereinafter referred to as "memory layer") 213 and a protective layer 215 are laminated on a substrate 220 in the order named. The substrate 220 is normally formed of a transparent material, such as, glass or polycarbonate.

Each of these layers can be formed by continuous sputtering or continuous deposition using the DC magnetron sputtering apparatus.

The interference layer 214 is provided for enhancing the magneto-optical effect and formed of, for example, a transparent dielectric material, such as, Si_3N_4 , AlN , SiO_2 , SiO , ZnS , MgF_2 or the like.

The protective layer 215 is used for protecting the magnetic layers and formed of a material like that of the interference layer 214.

The interference layer 214 and the protective layer 215 have nothing to do with the essence of the present invention, and thus can be omitted. Accordingly, no detailed explanation thereof will be given hereinbelow. Although not shown in Fig. 31, the protective layer 215 may be applied with a hard-coating material, such as, an ultraviolet-setting resin for protecting the films or using a magnetic-field modulation overwrite magnetic head.

The reproduction layer 211 is a layer for reproducing magnetization information held in the memory layer 213. The reproduction layer 211 has a magnetization characteristic such that it is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film at a given temperature or higher between room temperature and its Curie temperature. The reproduction layer 211 is located closer to a light incident side as compared with the intermediate layer 212 and the memory layer 213, and its Curie temperature is set to be higher than at least those of the intermediate layer 212 and the memory layer 213 for preventing deterioration of a Kerr rotation angle upon reproduction.

As a material of the reproduction layer 211, a rare earth-iron family amorphous alloy having a small perpendicular magnetic anisotropy, particularly, GdFeCo , is preferable. Rare earth light metal, such as, Nd , Pr , Sm or the like may be added for increasing the Kerr rotation angle at shorter wavelength. Preferably, the reproduction layer has a compensation temperature between room temperature and the Curie temperature. This compensation temperature is set to be near a Curie temperature of the intermediate layer 212, specifically, in a range of -50°C to $+100^\circ\text{C}$ relative to the Curie temperature of the intermediate layer 212, and preferably, in a range of -20°C to $+80^\circ\text{C}$ relative to the Curie temperature of the intermediate layer 212, which will be described later. Further, a composition range is set to $\text{Gd}_x(\text{Fe}_{100-y}\text{Co}_y)_{100-x}$, wherein $24 \leq x \leq 32$ (atomic %) and $20 \leq y \leq 50$ (atomic %).

The intermediate layer 212 is provided for the following three purposes:

- (1) The intermediate layer 212, around room temperature, moderates the magnetic wall energy between the reproduction layer 211 and the memory layer 213 and helps the reproduction layer 211 to be an in-plane magnetization film. This results in contributing to reduction in film thickness of the reproduction layer.
- (2) When reaching a given temperature or higher, the intermediate layer 212, along with the reproduction layer 211, transits to a perpendicular magnetization film to mediate the exchange coupling from the memory layer 213 to the reproduction layer 211.
- (3) At the Curie temperature or higher of the intermediate layer 212, the intermediate layer 212 cut off the exchange coupling between the reproduction layer 211 and the memory layer 213.

In order to achieve these purposes, the intermediate layer 212 is located between the reproduction layer 211 and the memory layer 213 and has a Curie temperature which is set to be higher than room temperature and lower than those of the reproduction layer 211 and the memory layer 213. The Curie temperature of the intermediate layer 212 is set to be high enough to mediate the exchange-coupling force from the memory layer 213 to the reproduction layer 211 at a medium-temperature portion within the light spot, but low enough to cut off the exchange-coupling force at a highest-temperature portion within the light spot, and thus preferably, 100°C or higher and 220°C or lower, and more preferably, 120°C or higher and 180°C or lower. As a material of the intermediate layer 212, for example, a rare earth-iron family amorphous alloy, particularly, GdFeCo , is preferable. A non-magnetic element, such as, Cr , Al , Si , Cu or the like may be added for lowering the Curie temperature. Further, a composition range is set to $\text{Gd}_p(\text{Fe}_{100-q}\text{Co}_q)_{100-p}$, wherein $25 \leq p \leq 50$ (atomic %) and

$0 \leq q \leq 20$ (atomic %).

The memory layer 213 is a layer for storing recorded information and thus is required to stably hold the very small magnetic domain of no more than $1\mu\text{m}$. As a material of the memory layer 213, a material which has a large perpendicular magnetic anisotropy and can stably hold a magnetization state, for example, a rare earth-iron family amorphous alloy, such as, TbFeCo, DyFeCo, TbDyFeCo or the like, garnet, a platinum family-iron family periodic structure film, such as, Pt/Co, Pd/Co or the like, or a platinum family-iron family alloy, such as, PtCo, PdCo or the like is preferable.

An element, such as, Al, Ti, Pt, Nb, Cr or the like may be added to the reproduction layer 211, the intermediate layer 212 and the memory layer 213 for improving their corrosion resistances. Further, for improving thermal conductivity, a layer formed of Al, AlTa, AlTi, TiCr, Cu or the like and having good thermal conductivity may be provided. Further, an initialization layer in which magnetization is aligned in one direction for performing the optical modulation overwrite may be provided. Further, auxiliary layers for recording assistance and reproducing assistance may be provided to adjust the exchange-coupling force or the magnetostatic coupling force.

Since the recording and reproduction of the data signal relative to the medium in the third embodiment is the same as in the first embodiment, explanation thereof will be omitted for brevity.

The third embodiment of the present invention will be described in further detail by way of experimental examples. However, the present invention is not limited to these experimental examples.

(Experimental Example 31)

Si, Gd, Tb, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate having a diameter of 130mm and a polycarbonate substrate with lands and grooves at a pitch of $1.6\mu\text{m}$ were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-6} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.4Pa, and thereafter, an SiN interference layer of 90nm thickness, a $\text{Gd}_{28}(\text{Fe}_{60}\text{Co}_{40})_{72}$ reproduction layer of 40nm thickness, a $\text{Gd}_{37}\text{Fe}_{63}$ intermediate layer of 10nm thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed in the order named, thus obtaining the medium with a structure shown in Fig. 31. Upon formation of each SiN dielectric layer, N_2 gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N_2 gases, so as to obtain a refractive index of 2.1. The $\text{Gd}_{28}(\text{Fe}_{60}\text{Co}_{40})_{72}$ reproduction layer was rare earth element sublattice magnetization dominant at room temperature, and was set to represent a saturation magnetization M_s of 225emu/cc, a compensation temperature of 217°C and a Curie temperature of 300°C or more.

The $\text{Gd}_{37}\text{Fe}_{63}$ intermediate layer was rare earth element sublattice magnetization dominant at room temperature, and was set to represent a saturation magnetization M_s of 470emu/cc and a Curie temperature of 190°C .

The $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer was iron family element lattice magnetization dominant, and was set to represent a saturation magnetization M_s of 250emu/cc and a Curie temperature of 270°C .

After recording a magnetic domain of a $0.78\mu\text{m}$ mark length in the magneto-optical recording medium, the magnetic domain was observed by a polarizing microscope under irradiation of a semiconductor laser beam of 830nm. While increasing the laser power, it was confirmed that the recorded magnetic domain was contracted and the magnetization was oriented in an erasing direction at the center (high-temperature region) of the light spot at a certain laser power.

Subsequently, the recording/reproduction characteristic was measured using this magneto-optical recording medium. The measurement was performed by setting N.A. of an objective lens to be 0.53, a laser beam wavelength to be 780nm (using an optical head), a linear velocity to be 9m/s and a recording power to be 10mW. First, erasing was performed entirely on the medium, and thereafter, a mark of $0.40\mu\text{m}$ length was recorded by modulating a laser beam at a frequency of 11.3MHz. Subsequently, a variation of C/N ratios were measured by changing a reproducing power from 0.8mW to 4.4mW. The results are shown in Fig. 32.

In the magneto-optical recording medium of the present invention, since a temperature of the medium does not increase sufficiently while the reproducing power is 1.0mW or less, magnetization of the reproduction layer is oriented substantially in a film plane. Accordingly, since the mark recorded in the memory layer is masked by the reproduction layer, substantially no C/N ratio is obtained. On the other hand, when the reproducing power is increased to about 2.0mW to 2.8mW, a medium-temperature region, that is, an aperture region, is formed within the reproducing spot to transfer the magnetic domain of the memory layer to the reproduction layer so that the C/N ratio is increased. A configuration of the aperture region at this time is substantially the same as in the super resolution of the conventional two-layered structure using the in-plane film as shown in Fig. 3B.

Accordingly, although the super-resolution phenomenon is generated, since size and location of the aperture region is not optimum, only about 36dB can be obtained as a C/N ratio. When the reproducing power is further increased to 3.2mW to 4.0mW, a portion appears within the spot where the intermediate layer reaches the Curie temperature, that is, a rear mask is formed. Then, as shown in Fig. 6A, the aperture configuration becomes optimum relative to the spot so that a C/N ratio of 45dB is obtained. On the other hand, when the reproducing power exceeds 4.0mW, the highest temperature exceeds the Curie temperature of the memory layer so that the recorded data are damaged to reduce the C/N ratio.

Subsequently, the mark-length dependency of C/N was examined by changing a laser-beam modulation frequency, at the time of recording, between 5.8MHz, 9.0MHz, 11.3MHz and 15MHz (corresponding to mark lengths 0.78 μ m, 0.50 μ m, 0.40 μ m and 0.30 μ m, respectively) with respect to the same medium. The results are shown in Fig. 33. As shown in the figure, the excellent spatial frequency characteristic was obtained in the recording medium of the present invention.

Subsequently, crosstalk with the adjacent track (hereinafter referred to as "crosstalk") was measured. First, erasing was performed entirely on the lands and the grooves, and thereafter, a signal of a 0.78 μ m mark length was recorded on the land as in the foregoing manner so as to measure a carrier level CL. Subsequently, a carrier level CG upon tracking the adjacent groove was measured. The crosstalk was represented by a ratio CL/CG. Since the experiment was performed on the assumption that data were recorded on both the land and groove, an effective track pitch was 0.8 μ m. The results are shown in Fig. 34. As clear from the figure, the crosstalk was suppressed to about -28dB in a range of the reproducing power of 3.2mW to 4.0mW, which range was optimum for the medium. This shows that the present medium is also effective for narrowing the track pitch.

The foregoing data were all obtained without applying the initializing magnetic field and the reproducing magnetic field, and the excellent results were obtained for the marks recorded at high density using an information recording/reproduction device like the conventional information recording/reproduction device. The measurement results of the C/N ratios under the optimum condition and the crosstalk at the same reproducing power are shown in Table 8 at Experimental Example 31.

(Experimental Example 32)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $Gd_x(Fe_{60}Co_{40})_{100-x}$ reproduction layer of 40nm thickness, a Gd_pFe_{100-p} intermediate layer of 10nm thickness, a $Tb_{20}(Fe_{80}Co_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 31. In this experimental example, Gd contents x and p of the reproduction layer and the intermediate layer, respectively, were changed variously so as to examine a variation of the characteristics relative to the compositions.

A relationship between Gd content x (at%) in the reproduction layer and C/N when recording the 0.40 μ m marks on the respective samples under the same condition as in Experimental Example 31, is shown in Fig. 35. For example, when seeing a curve with Gd content p (at%) in the intermediate layer being 30, it is the curve which is convex upward and has a maximal value around x=30. This is considered as follows: When x is small, a saturation magnetization M_s of the reproduction layer becomes small to cause an in-plane anisotropy of the reproduction layer to be reduced. Accordingly, a temperature at which the magnetization aligns in perpendicular due to the exchange coupling with the memory layer, is lowered so that the front mask effect is weakened to reduce C/N. To the contrary, when x is too large, the front mask effect becomes so strong that the intermediate layer reaches the Curie temperature before the aperture sufficiently opens, thereby also deteriorating C/N. The front mask effect is determined due to balance between the in-plane anisotropies of the reproduction layer and the intermediate layer such that, when the in-plane anisotropy of the reproduction layer is weakened, the in-plane anisotropy of the intermediate layer should be strengthened. Specifically, when Gd content p of the intermediate layer is increased, an optimum value of x is reduced. Accordingly, as shown in Fig. 35, a peak position of C/N shifts due to change in p. As will be described later, in the conventional two-layered super-resolution medium using an in-plane magnetization film, C/N of about 37dB was obtained relative to the mark length of 0.40 μ m. As compared with this, it is seen that the excellent super-resolution effect is achieved by the medium of the present invention. For ensuring high reliability of the information reproduction, it is necessary that C/N is no less than 43dB. It is preferable that Gd content x (at%) in the reproduction layer is in a range of $24 \leq x \leq 32$ in the super-resolution medium of the present invention. For ensuring the higher reliability, it is preferable that C/N is about 45dB. Accordingly, it is more preferable that Gd content x is set to be in a range of $26 \leq x \leq 30$.

Next, the crosstalk was measured for each of the mediums of this experimental example in the same manner as in Experimental Example 31. The results are shown in Fig. 36. For example, when seeing a curve with

Gd content p (at%) of the intermediate layer being 30, it is the curve which is convex downward and has a minimal value around $x=30$. This is caused by the following reason: With respect to the same composition of the intermediate layer, when x is large, an in-plane anisotropy of the reproduction layer is so large that the front mask effect becomes too strong. Accordingly, since a carrier level at the land does not increase, a difference is not distinct as compared with reproduction at the groove. To the contrary, when x is small, the front mask effect becomes small so that the reproduction at the groove is liable to be subjected to influence of the crosstalk. Accordingly, with regard to the crosstalk, the optimum value also exists at the most-balanced position between the in-plane anisotropies of the reproduction and intermediate layers. In consideration of the crosstalk being about -22dB obtained in the later-described measurement performed relative to a single-layer TbFeCo disc, the front mask effect appears in the super-resolution medium of the present invention when $x \geq 24$. Accordingly, the front mask is formed in the foregoing range of Gd content x (at%) derived in view of C/N, thereby being also effective to the crosstalk.

The same data are shown in Figs. 33 and 34 in terms of Gd content p (at%) in the intermediate layer.

Fig. 37 shows C/N data which are in the form of upward-convex curves like in Fig. 35. This is caused by the following reason: When Gd content in the intermediate layer is small, the in-plane anisotropy thereof is small, and the Curie temperature thereof is increased. Accordingly, if the reproducing power is increased until the intermediate layer reaches the Curie temperature, the aperture expands within the spot to an extreme extent so that the resolution is lowered. To the contrary, when Gd content in the intermediate layer is large, the intermediate layer reaches the Curie temperature with the low reproducing power so that the exchange coupling with the memory layer is not performed to a sufficient level. As described before, for ensuring the high reliability of the information reproduction, it is necessary that C/N is no less than 43dB. Accordingly, it is preferable that Gd content p (at%) in the intermediate layer is in a range of $20 \leq p \leq 50$ in the super-resolution medium of the present invention. As also described before, for ensuring the higher reliability, it is preferable that C/N is about 45dB. Accordingly, it is more preferable that Gd content p is set to be in a range of $30 \leq p \leq 45$.

On the other hand, from the crosstalk data shown in Fig. 38, it is seen that the crosstalk largely changes relative to Gd contents in the intermediate layer. This is because, since Gd content in the intermediate layer influences the lowering of both the in-plane anisotropy and the reproducing power, Gd content in the intermediate layer largely influences the front mask effect. According to the results shown in Fig. 38, the crosstalk was not necessarily improved in the composition providing C/N of no less than 43dB. When using -22dB, which is obtained by the single-layer TbFeCo disc, as a reference, the front mask effect is obtained when $p \geq 25$.

From the foregoing results, Gd content p (at%) in the intermediate layer of the present invention is set, preferably, to $25 \leq p \leq 50$, and more preferably, to $30 \leq p \leq 45$. A portion of the data obtained in this experimental example is shown in Table 8.

In this experimental example, the film thicknesses of the reproduction layer and the intermediate layer were set to 40nm and 10nm, respectively, for comparison. However, when considering the mask effect of the reproduction layer, the film thickness of the reproduction layer may have a value no less than 20nm. Further, in consideration that the intermediate layer works to cut off the exchange coupling between the reproduction layer and the memory layer at the Curie temperature or higher, the film thickness of the intermediate layer may have a value no less than 3nm. Further, the film thickness of the memory layer may have a value no less than 10nm for stably holding the magnetic domains, so that the medium which realizes the effect of the present invention can be obtained. To the contrary, in consideration of the necessary power for recording/reproduction of the information, it is preferable to suppress the film thickness of the total magnetic layers to 200nm or less.

Accordingly, when the film thicknesses are within the foregoing ranges, it is within the scope of the present invention.

(Experimental Example 33)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $Gd_x(Fe_{100-y}Co_y)_{100-x}$ reproduction layer of 40nm thickness, a Gd_pFe_{100-p} intermediate layer of 10nm thickness, a $Tb_{20}(Fe_{80}Co_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 31. In this experimental example, Co content y (at%) in the reproduction layer was changed variously relative to Gd contents x and p of the reproduction layer and the intermediate layer obtained in Experimental Example 32.

Co content in the GdFeCo alloy influences various materiality values, particularly, a perpendicular magnetic anisotropy K_u and a Curie temperature T_c . The reproduction layer in the present invention works not only to provide the mask effect, but also to enhance the Kerr effect in the aperture region. Since the Kerr rotation angle obtained upon irradiation of a polarization light beam onto a perpendicular magnetization film is, in gen-

eral, larger as a Curie temperature of a material is higher. Since quality of the reproduced signal is increased with the large Kerr rotation angle, it is preferable that the Curie temperature of the reproduction layer is set to a certain high value. When Co content in the GdFeCo alloy is reduced, the Curie temperature tends to be lowered so that it is desired to add Co to a certain extent. In this experimental example, $\text{Gd}_{24}(\text{Fe}_{80}\text{Co}_{20})_{76}$ was used for the reproduction layer. The results are shown in Table 8, wherein C/N of 42dB was obtained even relative to the 0.40 μm mark. Accordingly, the effect of the present invention was confirmed. However, when reducing Co content in the reproduction layer to 19at% or less, C/N was reduced to 39dB due to the lowering of the Curie temperature.

On the other hand, when Co content in the reproduction layer is too great, the reproduction layer becomes reluctant to transit to a perpendicular magnetization film even heated by the laser beam due to the lowering of the perpendicular magnetic anisotropy, that is, the exchange coupling with the memory layer is weakened, so that C/N is reduced. The results are shown in Table 8, wherein $\text{Gd}_{32}(\text{Fe}_{50}\text{Co}_{50})_{68}$ was used for the reproduction layer. As shown, C/N of 42dB was obtained even relative to the 0.40 μm mark. However, when increasing Co content in the reproduction layer to 51at% or greater, C/N was reduced to 38dB due to the insufficient exchange coupling in the aperture portion.

From the foregoing results, it is preferable that Co content y (at%) in the reproduction layer of the present invention is set to $20 \leq y \leq 50$.

(Experimental Example 34)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $\text{Gd}_x(\text{Fe}_{100-y}\text{Co}_y)_{100-x}$ reproduction layer of 40nm thickness, a $\text{Gd}_p(\text{Fe}_{100-q}\text{Co}_q)_{100-p}$ intermediate layer of 10nm thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 31. In this experimental example, Co content q (at%) in the intermediate layer was changed variously relative to Gd contents x and p and Co content y of the reproduction layer and the intermediate layer obtained in Experimental Examples 32 and 33.

Co content in the intermediate layer has relation to the Curie temperature and is one of important factors to determine the reproducing power to the medium. For example, assuming that a reproducing power is 4mW or larger when a linear velocity is 9m/s, a laser power for erasing data is required to be 7mW or greater in consideration of the power margin. Further, since the laser beam is in a pulsed form during the optical modulation recording, a recording power is required to be about 13mW so that reliability of the drive unit is extremely limited. Accordingly, the laser power upon data reproduction is set, preferably, to 4mW or less, and more preferably, to 3mW or less. For this, the Curie temperature of the intermediate layer should be 220°C or less.

Data shown in Table 8 were obtained using $\text{Gd}_{45}(\text{Fe}_{80}\text{Co}_{20})_{55}$ for the intermediate layer. When Co content in the intermediate layer is 20at%, the Curie temperature becomes 220°C so that the reliable information reproduction is possible. However, when Co content exceeds 20at%, the reproducing power is increased to extremely lower the reliability of the drive unit.

This experimental example has been explained as using GdFeCo for the intermediate layer. On the other hand, only in consideration of the Curie temperature, the Curie temperature is lowered by adding a non-magnetic element, such as, Al or Cr for the purpose of improving corrosion resistance. In this case, even when Co content exceeds 20at%, the Curie temperature of an acceptable value can be obtained due to the addition of the non-magnetic element. However, the property as a magnetic substance is deteriorated on the whole due to the addition of the non-magnetic element, and further, the perpendicular magnetic anisotropy is reduced due to the addition of Co. Accordingly, the exchange coupling with the memory layer at the aperture portion is weakened so that it becomes difficult to obtain a reproduced signal having excellent S/N. In view of the foregoing, it is preferable that the intermediate layer is formed of $\text{Gd}_p(\text{Fe}_{100-q}\text{Co}_q)_{100-p}$ as a main component, and that Co content q (at%) is set to $0 \leq q \leq 20$ even when another element is added.

(Experimental Example 35)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $\text{Gd}_x(\text{Fe}_{100-y}\text{Co}_y)_{100-x}$ reproduction layer of 40nm thickness, a $\text{Gd}_p(\text{Fe}_{100-q}\text{Co}_q)_{100-p}$ intermediate layer of 10nm thickness, a $\text{Tb}_a(\text{Fe}_{100-b}\text{Co}_b)_{100-a}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 31. In this experimental example, Tb content a (at%) and Co content b (at%) in the memory layer were changed variously relative to Gd contents x and p and Co contents y and q of the reproduction layer and the intermediate layer obtained in Experimental Examples 32, 33 and 34.

Fig. 39 shows a relationship between Tb content a (at%) in the memory layer and C/N, wherein a mark length is 0.40 μ m. On the other hand, Co content b (at%) in the memory layer is adjusted depending on Tb content so as to hold the Curie temperature to be constant at about 270°C.

As seen from the figure, the composition margin of the memory layer is sufficiently large in view of C/N so that C/N is substantially constant in a range of $18 \leq a \leq 31$. When Tb content a becomes no more than 18at%, a saturation magnetization becomes no less than 250emu/cc (iron family element sublattice magnetization dominant) so that influence of the diamagnetic field becomes large. As a result, further smaller magnetic domains (microdomain) are formed in the magnetic domain or deformation of configuration of the magnetic domain is caused so that noise components are increased to deteriorate C/N. To the contrary, when Tb content a becomes no less than 31at%, a saturation magnetization becomes no less than 200emu/cc (rare earth element sublattice magnetization dominant), and further, a compensation temperature becomes no less than 200°C. In this case, since the compensation temperature of the memory layer becomes higher than the Curie temperature of the intermediate layer, the memory layer is rare earth element sublattice magnetization dominant at a temperature where the exchange coupling with the reproduction layer is cut off. Then, since the magnetostatic coupling force acting on the reproduction layer from the memory layer is oriented in the same direction as the exchange-coupling force at the low temperature, it works in a direction to prevent the magnetic domain transferred to the reproduction layer from inverting due to the rear mask. Accordingly, the super-resolution effect is weakened to reduce C/N.

Comparison between the results shown in Fig. 39 and data obtained in the conventional two-layered super-resolution magneto-optical recording medium using an in-plane magnetization film, reveals that the effect of the present invention is obtained in a range of $14 \leq a \leq 33$. In order to ensure C/N of 42dB or more for improving the reliability, a range of $16 \leq a \leq 32$ is more preferable. Further, in order to ensure C/N which is stable in view of the composition margin, a range of $18 \leq a \leq 31$ is further preferable.

(Experimental Example 36)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $Gd_x(Fe_{100-y}Co_y)_{100-x}$ reproduction layer of 40nm thickness, a $Gd_p(Fe_{100-q}Co_q)_{100-p}$ intermediate layer of 10nm thickness, a $Tb_a(Fe_{100-b}Co_b)_{100-a}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 31. In this experimental example, Co content b (at%) in the memory layer was changed variously relative to Gd contents x and p and Co contents y and q of the reproduction layer and the intermediate layer and Tb content a of the memory layer obtained in Experimental Examples 32, 33, 34 and 35. One example of the results is shown in Table 1.

Co content in the memory layer has relation to the Curie temperature and is an important parameter for determining the laser power at the time of recording. In consideration of stability of data holding on the medium, the Curie temperature of the memory layer is required to be set to a certain high value. In view of this, it is preferable that the Curie temperature of the memory layer is about 180°C to 280°C. Accordingly, in order to ensure this Curie temperature in the range of Tb content described in Experimental Example 35, it is preferable that Co content b (at%) is set to $14 \leq b \leq 45$.

(Experimental Example 37)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $Gd_{28}(Fe_{60}Co_{40})_{72}$ reproduction layer of 40nm thickness, a $Gd_{37}Fe_{63}$ intermediate layer of 10nm thickness, a $Tb_{20}(Fe_{80}Co_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, and further, an Al heat radiation layer of 60nm was formed for improving the thermal characteristic, thus obtaining the medium with a structure shown in Fig. 40. It is known in the art that linear velocity dependency of the thermal characteristic can be improved by adding the heat radiation layer. Also in the present invention, linear velocity dependencies of the recording power and the reproducing power are improved by adding the heat radiation layer.

Although this effect is obtained in the optical modulation recording as described in Experimental Examples 31 to 36, the similar effect is also obtained in the magnetic-field modulation recording. In case of the magnetic-field modulation recording, it is known that the recorded mark becomes a bow-like shape (so-called arrow-feather mark) according to a configuration of the temperature distribution of the medium at the time of recording. By providing the heat radiation layer, there is an effect that a curvature of an arc portion of the mark can be reduced.

Fig. 41 shows recording power dependencies of carrier and noise when the magnetic-field modulation re-

cording was performed relative to the medium of this experimental example. As seen from the figure, according to this experimental example, even in case of the magnetic-field modulation recording, C/N was excellent, i.e. 44dB relative to even the small mark (0.40 μ m), thereby being capable of achieving the super-resolution effect of the present invention.

(Experimental Example 38)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $\text{Gd}_{28}(\text{Fe}_{60}\text{Co}_{40})_{72}$ reproduction layer of 40nm thickness, a $\text{Gd}_{37}\text{Fe}_{63}$ intermediate layer of 10nm thickness, a $\text{Dy}_{25}(\text{Fe}_{70}\text{Co}_{30})_{75}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 31.

In this experimental example, DyFeCo was used for the memory layer instead of TbFeCo. The good results as in Experimental Example 31 were obtained for both C/N and the crosstalk. It has been confirmed that the present invention is not limited to the TbFeCo memory layer.

Next, in order to make the effect of the present invention more distinct, like experiments were performed relative to the conventional medium structure for comparison.

(Comparative Example 12)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 80nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named. In other words, a single layer disc having, as a magnetic layer, only the memory layer used in Experimental Example 31 was prepared. First, the 0.40 μ m marks were recorded on the medium, and the reproducing power dependencies of carrier and noise were measured. The results are shown in Fig. 32. As seen in the figure, although a carrier level increases according to increment of the reproducing power, the slope is gradual since the mask effect observed in the medium of the present invention can not be obtained.

Next, the marks of various sizes were recorded on the medium of this comparative example, and the spatial frequency characteristic was measured. The results are shown in Fig. 33, wherein it is seen that, although the sufficiently high C/N ratio was obtained when the mark length was large, i.e. 0.78 μ m, the resolution was rapidly reduced when exceeding a cut-off frequency of the optical system.

Further, in the measurement of the crosstalk, since the effective track pitch of 0.8 μ m was narrow relative to the reproducing spot, and further, no mask effect was provided in case of the single layer disc, the crosstalk of only about -22dB was obtained as shown in Fig. 34.

(Comparative Example 13)

Using the same apparatus and method as in Experimental Example 31, an SiN interference layer of 90nm thickness, a $\text{Gd}_{28}(\text{Fe}_{60}\text{Co}_{40})_{72}$ reproduction layer of 70nm thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 3A.

First, the marks of 0.40 μ m mark length were recorded on the medium, and reproducing power dependencies of carrier and noise were measured. The results are shown in Fig. 32. As seen in the figure, since even the medium of this comparative example provides the super-resolution effect by using an in-plane magnetization film at low temperatures, a carrier level was increased, as in the medium of the present invention in Experimental Example 31, in a range of the reproducing power between 0.8mW and 2.8mW. However, in the two-layered super-resolution medium of this comparative example, since a rear mask does not appear even when the reproducing power is increased to 3mW or more, the rapid carrier increase as in the medium of the present invention in Experimental Example 31 was not observed.

Next, the marks of various sizes were recorded on the medium of this comparative example, and the spatial frequency characteristic was measured. As shown in Fig. 33, the results were such that, although the resolution was increased at high-frequency regions as compared with the single layer disc, since no rear mask effect was provided and a positional relationship between the aperture region and the spot was not optimum, the resolution was inferior as compared with the disc of Experimental Example 31.

On the other hand, with regard to the crosstalk, the front mask largely influences, but the rear mask does not. Accordingly, as shown in Fig. 34, the crosstalk of about -30dB, which is equivalent to that obtained in the medium of Experimental Example 31, was obtained.

Table 8

	Reproduction Layer $Gd_x(Fe_{100-y}Co_y)_{100-x}$			Intermediate Layer $Gd_p(Fe_{100-q-r}Co_qCr_r)_{100-p}$				Memory Layer $Tb_a(Fe_{100-b}Co_b)_{100-a}$		
	x (at%)	y (at%)	Film Thickness (nm)	p (at%)	q (at%)	r (at%)	Film Thickness (nm)	a (at%)	b (at%)	Film Thickness (nm)
Experimental Example 31	28	40	40	37	0	0	10	20	20	30
Experimental Example 32	24 32	40 40	40 40	45 25	0 0	10 0	10 0	20 20	20 20	30 30
Experimental Example 33	24 32	20 50	40 40	45 25	0 0	10 0	10 10	20 20	20 20	30 30
Experimental Example 34	32	40	40	45	20	0	10	20	20	30
Experimental Example 35	28 29	40 40	40 40	37 37	0 3	0 0	10 10	18 31	18 45	30 30
Experimental Example 36	28	40	40	37	0	0	10	18	14	30
Comparative Example 12	-	-	-	-	-	-	-	20	20	80
Comparative Example 13	28	40	70	-	-	-	-	20	20	30

Table 8 (Continued)

	C/N				Cross talk
	0.78um (dB)	0.40um (dB)	0.30um (dB)	0.78um (dB)	
Experimental Example 31	50	45	39	-28	
Experimental Example 32	49	42	34	-31	
Experimental Example 33	48	41	32	-26	
Experimental Example 34	48	43	35	-29	
Experimental Example 35	50	45	39	-28	
Experimental Example 36	49	44	39	-28	
Comparative Example 12	49	28	9	-22	
Comparative Example 13	50	36	28	-31	

(Fourth Embodiment)

In a fourth embodiment, preferable relationship between a Curie temperature of an intermediate layer and a compensation temperature of a reproduction layer will be described, wherein a magnetic layer showing an in-plane magnetic anisotropy at room temperature is used as the reproduction layer in the medium of the first embodiment.

Hereinbelow, the fourth embodiment of the present invention will be described in detail with reference to the drawings.

Fig. 42 shows a sectional view of an optical disc in the fourth embodiment. As shown in Fig. 42, in the optical disc used in this embodiment, an interference layer 314, a first magnetic layer (hereinafter referred to as "reproduction layer") 311, a third magnetic layer (hereinafter referred to as "intermediate layer") 312, a second magnetic layer (hereinafter referred to as "memory layer") 313 and a protective layer 315 are laminated on a substrate 320 in the order named. The substrate 320 is normally formed of a transparent material, such as, glass or polycarbonate.

Each of these layers can be formed by continuous sputtering or continuous deposition using the DC magnetron sputtering apparatus.

The interference layer 314 is provided for enhancing the magneto-optical effect and formed of, for example, a transparent dielectric material, such as, Si_3N_4 , AlN , SiO_2 , SiO , ZnS , MgF_2 or the like.

The protective layer 315 is used for protecting the magnetic layers and formed of a material like that of the interference layer 314.

The interference layer 314 and the protective layer 315 have nothing to do with the essence of the present invention, and thus, detailed explanation thereof will be omitted. Although not shown in Fig. 42, the protective layer 315 may be applied with a hard-coating material, such as, an ultraviolet-setting resin for protecting the films or using a magnetic-field modulation overwrite magnetic head.

The reproduction layer 311 is a layer for reproducing magnetization information held in the memory layer 313. The reproduction layer 311 has a magnetization characteristic such that it is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film at a given temperature or higher between room temperature and its Curie temperature. The reproduction layer 311 is located closer to a light

incident side as compared with the intermediate layer 312 and the memory layer 313, and its Curie temperature is set to be higher than at least those of the intermediate layer 312 and the memory layer 313 for preventing deterioration of a Kerr rotation angle upon reproduction. Further, the reproduction layer 311 has a compensation temperature T_{comp1} between room temperature and the Curie temperature, satisfying the following condition:

$$-20^{\circ}\text{C} \leq T_{comp1} - T_{c3} \leq 80^{\circ}\text{C}$$

wherein T_{c3} represents a Curie temperature of the intermediate layer.

As a specific material of the reproduction layer 311, a material, for example, a rare earth-iron family amorphous alloy having a small perpendicular magnetic anisotropy, such as, GdFeCo, GdTbFeCo, GdDyFeCo or the like, mainly containing GdFeCo, is preferable since it has a high Curie temperature and a low coercive force and easily causes contraction of recorded magnetic domains in a high-temperature region, which is the prime aim of the present medium. GdFeCo is particularly desired. Rare earth light metal, such as, Nd, Pr, Sm or the like may be added for increasing the Kerr rotation angle at shorter wavelength.

The intermediate layer 312 is provided for the following three purposes:

(1) The intermediate layer 312, around room temperature, moderates the magnetic wall energy between the reproduction layer 311 and the memory layer 313 and helps the reproduction layer 311 to be an in-plane magnetization film. This results in contributing to reduction in film thickness of the reproduction layer.

(2) When reaching a given temperature or higher, the intermediate layer 312, along with the reproduction layer 311, transits to a perpendicular magnetization film to mediate the exchange coupling from the memory layer 313 to the reproduction layer 311.

(3) At the Curie temperature or higher of the intermediate layer 312, the intermediate layer 312 cut off the exchange coupling between the reproduction layer 311 and the memory layer 313.

In order to achieve these purposes, the intermediate layer 312 is located between the reproduction layer 311 and the memory layer 313 and has a Curie temperature which is set to be higher than room temperature and lower than those of the reproduction layer 311 and the memory layer 313. The Curie temperature of the intermediate layer 312 is set to be high enough to mediate the exchange-coupling force from the memory layer 313 to the reproduction layer 311 at a medium-temperature portion within the light spot, but low enough to cut off the exchange-coupling force at a highest-temperature portion within the light spot, and thus preferably, 80°C or higher and 220°C or lower, and more preferably, 110°C or higher and 180°C or lower. As a material of the intermediate layer 312, for example, a rare earth-iron family amorphous alloy, such as, TbFe, TbFeCo, GdFe, GdFeCo, GdTbFeCo, GdDyFeCo, DyFe, DyFeCo, TbDyFeCo or the like is preferable. A non-magnetic element, such as, Cr, Al, Si, Cu or the like may be added for lowering the Curie temperature. Further, when masking a low-temperature region by causing the reproduction layer to be an in-plane magnetization film at a low temperature, it is preferable that an in-plane magnetic anisotropy of the intermediate layer at room temperature is greater than that of the reproduction layer at room temperature, for example, a saturation magnetization M_s of the intermediate layer at room temperature is greater than that of the reproduction layer at room temperature, for strengthening the in-plane magnetic anisotropy of the reproduction layer at the low temperature.

The memory layer 313 is a layer for storing recorded information and thus is required to stably hold the very small magnetic domain of no more than $1\mu\text{m}$. As a material of the memory layer 313, a material which has a large perpendicular magnetic anisotropy and can stably hold a magnetization state, for example, a rare earth-iron family amorphous alloy, such as, TbFeCo, DyFeCo, TbDyFeCo or the like, garnet, a platinum family-iron family periodic structure film, such as, Pt/Co, Pd/Co or the like, or a platinum family-iron family alloy, such as, PtCo, PdCo or the like is preferable.

An element, such as, Al, Ti, Pt, Nb, Cr or the like may be added to the reproduction layer 311, the intermediate layer 312 and the memory layer 313 for improving their corrosion resistances. Further, for improving thermal conductivity, a layer formed of Al, AlTa, AlTi, TiCr, Cu or the like and having good thermal conductivity may be provided. Further, an initialization layer in which magnetization is aligned in one direction for performing the optical modulation overwrite may be provided. Further, auxiliary layers for recording assistance and reproducing assistance may be provided to adjust the exchange-coupling force or the magnetostatic coupling force.

Since the recording and reproduction of the data signal relative to the medium in the fourth embodiment is the same as in the first embodiment, explanation thereof will be omitted for brevity.

In the reproducing process explained in the first embodiment, for forming the rear mask within the spot, the intermediate layer should reach the Curie temperature in the highest-temperature portion within the spot. The laser power for the information reproduction is normally set to about no more than 4mW on the medium since, if it is more than 4mW , the margin relative to the laser power at the time of recording becomes small. In consideration that a temperature reaches about 220°C by irradiation of the reproducing power, the Curie temperature of the intermediate layer should be set to 220°C or less. To the contrary, since the rear mask

should be formed only at a portion in the spot, if the intermediate layer reaches the Curie temperature without irradiation of the laser beam, neither the front mask nor the aperture is formed so that the signal can not be reproduced. A temperature in the magneto-optical recording/reproduction device normally increases to 50°C to 60°C. Accordingly, the Curie temperature of the intermediate layer should be 80°C or higher, or otherwise the stable information reproduction can not be performed. In view of this, the Curie temperature of the intermediate layer should be set to a range of 80°C to 220°C.

One condition for stably forming the rear mask when the intermediate layer reaches around the Curie temperature is that Hleak is small as described in the first embodiment. As shown in relation (10), Hleak is proportional to the saturation magnetization Ms_1 around the recorded magnetic domain. Thus, Ms_1 is required to be small. Accordingly, the foregoing condition is satisfied, provided that the reproduction layer reaches around the compensation temperature when the intermediate layer reaches around the Curie temperature.

Next, consideration will be given to Hst which constitutes another condition for forming the rear mask. Hst represents the magnetostatic coupling force acting on the reproduction layer from the recorded magnetic domain of the memory layer when the intermediate layer reaches around the Curie temperature. When the memory layer and the reproduction layer are of an anti-parallel type, Hst works in a direction to invert the transferred magnetic domain so as to form the rear mask. On the other hand, in case of a parallel type, Hst works in a direction to prevent formation of the rear mask. Specifically, Hst works in a direction to form the rear mask, provided that, for example, when the memory layer is iron family element sublattice magnetization dominant, the reproduction layer is rare earth element sublattice magnetization dominant at a temperature around the Curie temperature T_{c3} of the intermediate layer. This means that the effect of Hst to form the rear mask is large when the compensation temperature T_{comp1} of the reproduction layer is higher than the Curie temperature T_{c3} of the intermediate layer.

As described above, for reducing the magnetic-domain holding effect by Hleak and increasing the magnetic-domain contracting effect by Hst, the compensation temperature T_{comp1} of the reproduction layer is set to be somewhat higher than the Curie temperature T_{c3} of the intermediate temperature, wherein the rear mask is formed most stably. On the other hand, if T_{comp1} is lowered, the magnetic-domain contracting effect by Hst is reduced so that the rear mask can not be formed stably, thereby lowering quality of the reproduced signal. To the contrary, if T_{comp1} is too high, Ms_1 is increased to raise Hleak so that the magnetic domain of the reproduction layer becomes reluctant to contract even when the intermediate layer reaches the Curie temperature, thereby also lowering quality of the reproduced signal. Specifically, when $T_{comp1} - T_{c3}$ is set to be some tens (°C), and more concretely, no less than -20°C and no more than 80°C, the effect of the present invention becomes maximum.

The present invention will be described in further detail by way of experimental examples. However, the present invention is not limited to these experimental examples.

(Experimental Example 37)

Si, Gd, Tb, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate having a diameter of 130mm and a polycarbonate substrate with lands and grooves at a pitch of 1.6μm were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-5} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.4Pa, and thereafter, an SiN interference layer of 90nm thickness, a $Gd_{28}(Fe_{60}Co_{40})_{72}$ reproduction layer of 40nm thickness, a $Gd_{37}Fe_{63}$ intermediate layer of 10nm thickness, a $Tb_{20}(Fe_{80}Co_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed in the order named, thus obtaining the medium with a structure shown in Fig. 42. Upon formation of each SiN dielectric layer, N_2 gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N_2 gases, so as to obtain a refractive index of 2.1. The $Gd_{28}(Fe_{60}Co_{40})_{72}$ reproduction layer was rare earth element sublattice magnetization dominant at room temperature, and was set to represent a saturation magnetization Ms_1 of 180emu/cc, a compensation temperature T_{comp1} of 215°C and a Curie temperature T_{c1} of 300°C or more. The $Gd_{37}Fe_{63}$ intermediate layer was rare earth element sublattice magnetization dominant at room temperature, and was set to represent a saturation magnetization Ms_3 of 450emu/cc and a Curie temperature T_{c3} of 190°C. The $Tb_{20}(Fe_{80}Co_{20})_{80}$ memory layer was iron family element lattice magnetization dominant, and was set to represent a saturation magnetization Ms_2 of -250emu/cc and a Curie temperature T_{c2} of 270°C. Hereinafter, a polarity of a saturation magnetization will be described as being positive in case of rare earth element sublattice magnetization dominant and as being negative in case of iron family element sublattice magnetization dominant.

After recording a magnetic domain of a 0.78μm mark length in the magneto-optical recording medium, the

magnetic domain was observed by a polarizing microscope under irradiation of a semiconductor laser beam of 830nm. While increasing the laser power, it was confirmed that the recorded magnetic domain was contracted and the magnetization was oriented in an erasing direction at the center (high-temperature region) of the light spot at a certain laser power.

Subsequently, the recording/reproduction characteristic was measured using this magneto-optical recording medium. The measurement was performed by setting N.A. of an objective lens to be 0.53, a laser beam wavelength to be 780nm (using an optical head), a linear velocity to be 9m/s and a recording power to be 10mW. First, erasing was performed entirely on the medium, and thereafter, a mark of 0.40 μ m length was recorded by modulating a laser beam at a frequency of 11.3MHz. Subsequently, a variation of C/N ratios were measured by changing a reproducing power from 0.8mW to 4.4mW. The results are shown in Fig. 43.

In the magneto-optical recording medium of the present invention, since a temperature of the medium does not increase sufficiently while the reproducing power is 1.0mW or less, magnetization of the reproduction layer is oriented substantially in a film plane. Accordingly, since the mark recorded in the memory layer is masked by the reproduction layer, substantially no C/N ratio is obtained. On the other hand, when the reproducing power is increased to about 2.0mW to 2.8mW, a medium-temperature region, that is, an aperture region, is formed within the reproducing spot to transfer the magnetic domain of the memory layer to the reproduction layer so that the C/N ratio is increased. A configuration of the aperture region at this time is substantially the same as in the super resolution of the conventional two-layered structure using the in-plane film as shown in Fig. 3B. Accordingly, although the super-resolution phenomenon is generated, since size and location of the aperture region is not optimum, only about 36dB can be obtained as a C/N ratio. When the reproducing power is further increased to 3.2mW to 4.0mW, a portion appears within the spot where the intermediate layer reaches the Curie temperature, that is, a rear mask is formed. Then, as shown in Fig. 6A, the aperture configuration becomes optimum relative to the spot so that a C/N ratio of 45dB is obtained. On the other hand, when the reproducing power exceeds 4.0mW, the highest temperature exceeds the Curie temperature of the memory layer so that the recorded data are damaged to reduce the C/N ratio.

Next, amplitudes and DC levels of the reproduced signal were measured for further supporting the formation of the rear mask in the magneto-optical recording medium of the present invention. Carrier and noise shown in Fig. 44 are the same data as those described before. In case of the recorded mark length being 0.4 μ m, when the reproducing power exceeds 3mW, a carrier level is rapidly increased so that the formation of the rear mask can be confirmed.

The amplitudes and DC levels were obtained from the reproduced signal for the 0.8 μ m marks recorded in the same medium. The DC level takes a positive sign at an erasing side. In case of the conventional optical disc, an aperture configuration does not change even when the reproducing power is changed. Accordingly, when the reproducing power is within a range which does not cause the memory layer to reach the Curie temperature, a relationship between the amplitude of the reproduced signal and the reproducing power forms a straight line passing the origin. Further, the mark is not recorded over the full width of the spot light so that erased-state portions remain at both sides of the mark. Accordingly, even when the marks are recorded with a duty cycle of 50%, the DC level of the reproduced signal does not become 0, but offsets to the erasing side (positive side in Fig. 44). Thus, each of relationships of both the amplitude and the DC level relative to the reproducing power forms a straight line with a positive slope passing through the origin. Alternatively, when reduction in the Kerr rotation angles of the reproduction layer due to the power increase is at a level which can not be ignored, a curve is formed which is slightly convex upward depending on such a level. On the other hand, in case of the super-resolution disc of the present invention, a straight line does not pass the origin, and further, its slope is changed around the reproducing power of 3mW. This is considered as follows:

When the reproducing power is 0.5mW or less, even the highest-temperature portion does not reach a temperature where the reproduction layer transits from an in-plane magnetization film to a perpendicular magnetization film. Accordingly, the magnetization of the reproduction layer is in plane, that is, masked, in all the regions within the spot. Thus, the amplitude and the DC level are both 0. On the other hand, when the reproducing power exceeds 0.5mW, a part of the reproduction layer within the spot becomes a perpendicular magnetization film. When the power is further increased, since the aperture region expands, both the amplitude and the DC level are rapidly increased with a slope exceeding a proportional relationship with the reproducing power. However, when the reproducing power exceeds 3mW, the rear mask starts to be formed within the spot so that a direction of the magnetization aligns in the erasing direction in the rear-masked portion. This portion worked for the signal reproduction before appearance of the rear mask, but does not work for the signal reproduction as being masked in the erasing direction when the rear mask appears. Accordingly, across the reproducing power of 3mW, the DC level is rapidly increased in the erasing direction, while the amplitude of the reproduced signal is reduced. From the foregoing results, the behavior of the rear mask in the super-resolution disc of the present invention has been supported.

Further, in order to confirm that the super-resolution effect of the present invention is generated without applying the reproducing magnetic field from the external, the results of examination about dependency upon the reproducing magnetic field are shown in Fig. 45. Fig. 45 was obtained in the following manner. After the 0.4 μ m marks were recorded on the disc as in the foregoing manner, the reproducing magnetic field was changed while performing the signal reproduction with the reproducing power of 3.2mW, and a variation of C/N ratios at that time was plotted. As clear from this figure, the C/N ratio of 45dB was stably obtained in a range of the reproducing magnetic field ± 200 Oe.

Subsequently, the mark-length dependency of C/N was examined by changing a laser-beam modulation frequency, at the time of recording, between 5.8MHz, 9.0MHz, 11.3MHz and 15MHz (corresponding to mark lengths 0.78 μ m, 0.50 μ m, 0.40 μ m and 0.30 μ m, respectively) with respect to the same medium. The results are shown in Fig. 46. As shown in the figure, the excellent spatial frequency characteristic was obtained in the recording medium of the present invention.

Subsequently, crosstalk with the adjacent track (hereinafter referred to as "crosstalk") was measured. First, erasing was performed entirely on the lands and the grooves, and thereafter, a signal of a 0.78 μ m mark length was recorded on the land as in the foregoing manner so as to measure a carrier level CL. Subsequently, a carrier level CG upon tracking the adjacent groove was measured. The crosstalk was represented by a ratio CL/CG. Since the experiment was performed on the assumption that data were recorded on both the land and groove, an effective track pitch was 0.8 μ m. The results are shown in Fig. 47. As clear from the figure, the crosstalk was suppressed to about -28dB in a range of the reproducing power of 3.2mW to 4.0mW, which range was optimum for the medium. This shows that the present medium is also effective for narrowing the track pitch.

The foregoing data were all obtained without applying the initializing magnetic field, and the excellent results were obtained for the marks recorded at high density using an information recording/reproduction device like the conventional information recording/reproduction device. The measurement results of the C/N ratios under the optimum condition and the crosstalk at the same reproducing power are shown in Table 9 at Experimental Example 37.

(Experimental Example 38)

Using the same apparatus and method as in Experimental Example 37, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 40nm thickness, a GdFeCo intermediate layer of 10nm thickness, a TbFeCo memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 42. In this experimental example, by changing the compositions of the reproduction layer and the intermediate layer, the saturation magnetization, the compensation temperature and the Curie temperature of those layers were changed so as to examine a variation of the characteristics relative to those materiality values.

A relationship between a saturation magnetization Ms1 (emu/cc) of the reproduction layer and C/N when recording the 0.40 μ m marks on the respective samples under the same condition as in Experimental Example 37, is shown in Fig. 48. For example, when seeing a curve with a saturation magnetization Ms3 (emu/cc) of the intermediate layer being 100, it is the curve which is convex upward and has a maximal value around Ms1=260. This is considered as follows: When the saturation magnetization Ms1 of the reproduction layer is small, an in-plane anisotropy of the reproduction layer is reduced. Accordingly, a temperature at which the magnetization aligns in perpendicular due to the exchange coupling with the memory layer, is lowered so that the front mask effect is weakened to reduce C/N. To the contrary, when Ms1 is too large, the front mask effect becomes so strong that the intermediate layer reaches the Curie temperature before the aperture sufficiently opens, thereby also deteriorating C/N. The front mask effect is determined due to balance between the in-plane anisotropies of the reproduction layer and the intermediate layer such that, when the in-plane anisotropy of the reproduction layer is weakened, the in-plane anisotropy of the intermediate layer should be strengthened. Specifically, when the saturation magnetization Ms3 of the intermediate layer is increased, an optimum value of Ms1 is reduced. Accordingly, as shown in Fig. 48, a peak position of C/N shifts due to change in Ms3. As will be described later, in the conventional two-layered super-resolution medium using an in-plane magnetization film, C/N of about 37dB was obtained relative to the mark length of 0.40 μ m. As compared with this, it is seen that the excellent super-resolution effect is achieved by the medium of the present invention. For ensuring high reliability of the information reproduction, it is necessary that C/N is no-less than 43dB. It is preferable that the saturation magnetization Ms1 of the reproduction layer at room temperature is in a range of $20 \leq Ms1 \leq 340$ (rare earth element sublattice magnetization dominant) in the super-resolution medium of the present invention. For ensuring the higher reliability, it is preferable that C/N is about 45dB. Accordingly, it is more preferable that Ms1 is set to be in a range of $100 \leq Ms1 \leq 260$.

Next, the crosstalk was measured for each of the mediums of this experimental example in the same man-

ner as in Experimental Example 37. The results are shown in Fig. 49. For example, when seeing a curve with the saturation magnetization Ms_3 (emu/cc) of the intermediate layer being 100, it is the curve which is convex downward and has a minimal value around $Ms_1=260$. This is caused by the following reason: With respect to the same composition of the intermediate layer, when Ms_1 is large, an in-plane anisotropy of the reproduction layer is so large that the front mask effect becomes too strong. Accordingly, since a carrier level at the land does not increase, a difference is not distinct as compared with reproduction at the groove. To the contrary, when Ms_1 is small, the front mask effect becomes small so that the reproduction at the groove is liable to be subjected to influence of the crosstalk. Accordingly, with regard to the crosstalk, the optimum value also exists at the most-balanced position between the in-plane anisotropies of the reproduction and intermediate layers.

In consideration of the crosstalk being about -22dB obtained in the later-described measurement performed relative to a single-layer TbFeCo disc, it is assumed that a level of the crosstalk where the effect of the present invention fully appears, is -25dB. Accordingly, the front mask is formed in the foregoing range of Ms_1 derived in view of C/N, thereby being also effective to the crosstalk.

The same data are shown in Figs. 50 and 51 in terms of the saturation magnetization Ms_3 (emu/cc) of the intermediate layer. Fig. 50 shows C/N data which are in the form of upward-convex curves like in Fig. 48. This is caused by the following reason: When the saturation magnetization Ms_3 of the intermediate layer is small, the in-plane anisotropy thereof is small. Accordingly, if the reproducing power is increased until the intermediate layer reaches the Curie temperature, the aperture expands within the spot to an extreme extent so that the resolution is lowered. To the contrary, when the saturation magnetization Ms_3 of the intermediate layer is large, the exchange coupling with the memory layer is not performed to a sufficient level before the intermediate layer reaches the Curie temperature. As described before, for ensuring the high reliability of the information reproduction, it is necessary that C/N is no less than 43dB. Accordingly, it is preferable that the saturation magnetization Ms_3 of the intermediate layer is in a range of $-200 \leq Ms_3 \leq 700$ in the super-resolution medium of the present invention. On the other hand, from the crosstalk data shown in Fig. 51, it is seen that the crosstalk largely changes relative to the saturation magnetization Ms_3 of the intermediate layer. This is because the saturation magnetization of the intermediate layer largely influences the front mask effect. According to the results shown in Fig. 51, the crosstalk was not necessarily improved in the composition providing C/N of no less than 43dB. When using -25dB as a reference as before, the front mask effect was obtained when $Ms_3 \geq -150$. Accordingly, in consideration of both C/N and the crosstalk, the saturation magnetization Ms_3 of the intermediate layer is preferably set to $-150 \leq Ms_3 \leq 700$. For further narrowing the track pitch, more excellent crosstalk is required. Accordingly, when the crosstalk is no more than -30dB, then $200 \leq Ms_3 \leq 700$. Further, for ensuring C/N of about 45dB for higher reliability, then $200 \leq Ms_3 \leq 550$. From the foregoing results, the saturation magnetization Ms_3 of the intermediate layer of the present invention is set, preferably, to $-150 \leq Ms_3 \leq 700$, more preferably, to $200 \leq Ms_3 \leq 700$, and further preferably, to $200 \leq Ms_3 \leq 500$. A portion of the data obtained in this experimental example is shown in Table 9.

For supporting the foregoing rear mask formation mechanism, the experiment results obtained in this experimental example are expressed from another point of view. Fig. 52 is a diagram showing a relationship between the saturation magnetization and the compensation temperature of the reproduction layer. Fig. 53 is a diagram showing a relationship between the saturation magnetization and the Curie temperature of the intermediate layer. The shown relationships may change depending on a combination of the compositions of GdFeCo. In this experimental example, the characteristics were changed not largely by Co content, but largely by Gd content so that the curves as shown in Figs. 52 and 53 were obtained. In the C/N data shown in Fig. 48, the peak position shifted depending on the saturation magnetization of the intermediate layer. On the other hand, by writing the C/N data based on Figs. 52 and 53 so that the axis of abscissas represent a difference between the compensation temperature of the reproduction layer and the Curie temperature of the intermediate layer ($\Delta T = T_{comp1} - T_{c3}$), curves are obtained as shown in Fig. 54, wherein the peak positions substantially coincide with each other.

As described before, the rear mask formation of the present invention largely depends on directions and magnitudes of magnetizations of the reproduction layer and the memory layer when the intermediate layer substantially reaches the Curie temperature to cut off the exchange coupling between the reproduction layer and the memory layer. In this experimental example, the composition of the memory layer is held constant and iron family element sublattice magnetization dominant at room temperature. Accordingly, whether or not the rear mask is formed depends on the characteristic of the reproduction layer.

In a range of $0 \leq \Delta T \leq 60$, when the intermediate layer reaches the Curie temperature, the reproduction layer does not reach the compensation temperature and thus is rare earth element sublattice magnetization dominant. Accordingly, the magnetostatic coupling force from the memory layer which is iron family element sublattice magnetization dominant, works in a direction to assist formation of the rear mask. Further, since the saturation magnetization of the reproduction layer itself is also small, the leakage magnetic field from around

the magnetic domain is small so that the mask is liable to be formed. As a result, high C/N can be obtained.

In case of ΔT reduced to be a negative value, when the intermediate layer reaches the Curie temperature, the reproduction layer already exceeds the compensation temperature so as to be iron family element sublattice magnetization dominant. Accordingly, the magnetostatic coupling force from the memory layer works in a direction to prevent contraction of the magnetic domain transferred to the reproduction layer so that the mask is reluctant to be formed. As a result, C/N is gradually reduced. To the contrary, when ΔT is too great, the saturation magnetization of the reproduction layer at the time of cutting-off of the exchange coupling is too large so that the magnetic domain is caused to be held due to the leakage magnetic field. As a result, the rear mask is not formed, and thus, C/N is reduced.

From these results, C/N of no less than 43dB is obtained when $-20 \leq T_{\text{comp1}} - T_{\text{c3}} \leq 80$, and C/N of no less than 45dB is obtained when $0 \leq T_{\text{comp1}} - T_{\text{c3}} \leq 50$.

In this experimental example, the film thicknesses of the reproduction layer and the intermediate layer were set to 40nm and 10nm, respectively, for comparison. However, when considering the mask effect of the reproduction layer, the film thickness of the reproduction layer may have a value no less than 20nm. Further, in consideration that the intermediate layer works to cut off the exchange coupling between the reproduction layer and the memory layer at the Curie temperature or higher, the film thickness of the intermediate layer may have a value no less than 3nm. Further, the film thickness of the memory layer may have a value no less than 10nm for stably holding the magnetic domains, so that the medium which realizes the effect of the present invention can be obtained. To the contrary, in consideration of the necessary power for recording/reproduction of the information, it is preferable to suppress the film thickness of the total magnetic layers to 200nm or less.

Accordingly, when the film thicknesses are within the foregoing ranges, it is within the scope of the present invention.

(Experimental Example 39)

Using the same apparatus and method as in Experimental Example 37, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 40nm thickness, a GdFeCo intermediate layer of 10nm thickness, a TbFeCo memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 42. In this experimental example, the saturation magnetization M_{s2} (emu/cc) of the memory layer was changed variously relative to the optimum film characteristics of the reproduction layer and the intermediate layer obtained in Experimental Example 38.

Fig. 55 shows a relationship between the saturation magnetization of the memory layer and C/N (mark length 0.40 μm). As seen from the figure, the composition margin of the memory layer is sufficiently large in view of C/N so that C/N is substantially constant in a range of $-300 \leq M_{\text{s2}} \leq 200$. When the saturation magnetization of the memory layer exceeds -300emu/cc (iron family element sublattice magnetization dominant), influence of the diamagnetic field of the memory layer itself becomes large. As a result, further smaller magnetic domains (microdomain) are formed in the magnetic domain or deformation of configuration of the magnetic domain is caused so that noise components are increased to deteriorate C/N. To the contrary, when the saturation magnetization of the memory layer becomes no less than 200emu/cc (rare earth element sublattice magnetization dominant), a compensation temperature of the memory layer becomes no less than 200°C. In this case, since the compensation temperature of the memory layer becomes higher than the Curie temperature of the intermediate layer, the memory layer is rare earth element sublattice magnetization dominant at a temperature where the exchange coupling with the reproduction layer is cut off. Then, since the magnetostatic coupling force acting on the reproduction layer from the memory layer is oriented in the same direction as the exchange-coupling force at the low temperature, it works in a direction to prevent the magnetic domain transferred to the reproduction layer from inverting due to the rear mask. Accordingly, the super-resolution effect is weakened to reduce C/N.

From the results in Fig. 55, C/N of 43dB or higher can be obtained due to the super-resolution effect of the present invention when $-350 \leq M_{\text{s2}} \leq 250$. Further, in order to ensure C/N which is stable in view of the composition margin, a range of $-300 \leq M_{\text{s2}} \leq 200$ is preferable.

(Experimental Example 40)

Using the same apparatus and method as in Experimental Example 37, an SiN interference layer of 90nm thickness, a $\text{Gd}_{28}(\text{Fe}_{60}\text{Co}_{40})_{72}$ reproduction layer of 40nm thickness, a $\text{Gd}_{37}\text{Fe}_{63}$ intermediate layer of 10nm thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, and further, an Al heat radiation layer of 60nm

was formed for improving the thermal characteristic, thus obtaining the medium with a structure shown in Fig. 56. It is known in the art that linear velocity dependency of the thermal characteristic can be improved by adding the heat radiation layer. Also in the present invention, linear velocity dependencies of the recording power and the reproducing power are improved by adding the heat radiation layer.

Although this effect is obtained in the optical modulation recording, the similar effect is also obtained in the magnetic-field modulation recording. In case of the magnetic-field modulation recording, it is known that the recorded mark becomes a bow-like shape (so-called arrow-feather mark) according to a configuration of the temperature distribution of the medium at the time of recording. By providing the heat radiation layer, there is an effect that a curvature of an arc portion of the mark can be reduced.

Fig. 57 shows recording power dependencies of carrier and noise when the magnetic-field modulation recording was performed relative to the medium of this experimental example. As seen from the figure, according to this experimental example, even in case of the magnetic-field modulation recording, C/N was excellent, i.e. 44dB relative to even the small mark ($0.40\mu\text{m}$), thereby being capable of achieving the super-resolution effect of the present invention.

(Experimental Example 41)

Using the same apparatus and method as in Experimental Example 37, an SiN interference layer of 90nm thickness, a $\text{Gd}_{28}(\text{Fe}_{60}\text{Co}_{40})_{72}$ reproduction layer of 40nm thickness, a $\text{Gd}_{37}\text{Fe}_{63}$ intermediate layer of 10nm thickness, a $\text{Dy}_{25}(\text{Fe}_{70}\text{Co}_{30})_{75}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 42.

In this experimental example, DyFeCo was used for the memory layer instead of TbFeCo. The good results as in Experimental Example 37 were obtained for both C/N and the crosstalk. It has been confirmed that the present invention is not limited to the TbFeCo memory layer.

Next, in order to make the effect of the present invention more distinct, like experiments were performed relative to the conventional medium structure for comparison.

(Comparative Example 14)

Using the same apparatus and method as in Experimental Example 37, an SiN interference layer of 90nm thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 80nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named. In other words, a single layer disc having, as a magnetic layer, only the memory layer used in Experimental Example 37 was prepared. First, the $0.40\mu\text{m}$ marks were recorded on the medium, and the reproducing power dependencies of carrier and noise were measured. The results are shown in Fig. 43. As seen in the figure, although a carrier level increases according to increment of the reproducing power, the slope is gradual since the mask effect observed in the medium of the present invention can not be obtained.

Next, the marks of various sizes were recorded on the medium of this comparative example, and the spatial frequency characteristic was measured. The results are shown in Fig. 46, wherein it is seen that, although the sufficiently high C/N ratio was obtained when the mark length was large, i.e. $0.78\mu\text{m}$, the resolution was rapidly reduced when exceeding a cut-off frequency of the optical system.

Further, in the measurement of the crosstalk, since the effective track pitch of $0.8\mu\text{m}$ was narrow relative to the reproducing spot, and further, no mask effect was provided in case of the single layer disc, the crosstalk of only about -22dB was obtained as shown in Fig. 47.

(Comparative Example 15)

Using the same apparatus and method as in Experimental Example 37, an SiN interference layer of 90nm thickness, a $\text{Gd}_{28}(\text{Fe}_{60}\text{Co}_{40})_{72}$ reproduction layer of 70nm thickness, a $\text{Tb}_{20}(\text{Fe}_{80}\text{Co}_{20})_{80}$ memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the medium with a structure shown in Fig. 3A.

First, the marks of $0.40\mu\text{m}$ mark length were recorded on the medium, and reproducing power dependencies of carrier and noise were measured. The results are shown in Fig. 43. As seen in the figure, since even the medium of this comparative example provides the super-resolution effect by using an in-plane magnetization film at low temperatures, a carrier level was increased, as in the medium of the present invention in Experimental Example 37, in a range of the reproducing power between 0.8mW and 2.8mW. However, in the two-layered super-resolution medium of this comparative example, since a rear mask does not appear even

when the reproducing power is increased to 3mW or more, the rapid carrier increase as in the medium of the present invention in Experimental Example 37 was not observed.

Next, the marks of various sizes were recorded on the medium of this comparative example, and the spatial frequency characteristic was measured. As shown in Fig. 46, the results were such that, although the resolution was increased at high-frequency regions as compared with the single layer disc, since no rear mask effect was provided and a positional relationship between the aperture region and the spot was not optimum, the resolution was inferior as compared with the disc of Experimental Example 37.

On the other hand, with regard to the crosstalk, the front mask largely influences, but the rear mask does not. Accordingly, as shown in Fig. 47, the crosstalk of about -30dB, which is equivalent to that obtained in the medium of Experimental Example 37, was obtained.

Table 9

	Reproduction Layer $Gd_x(Fe_{100-y}Co_y)_{100-x}$					
	x (at%)	y (at%)	Film Thick- ness (nm)	Saturation Magnet- ization (emu/cc)	Compen- sation Temperature (°C)	Curle Tempe- rature (°C)
Experimental Example 37	28	40	40	180	215	>300
Experimental Example 38	24 32	40 40	40 40	20 340	110 270	>300 >300
Experimental Example 39	28 29	40 40	40 40	180 180	215 230	>300 >300
Comparative Example 14	-	-	-	-	-	-
Comparative Example 15	28	40	70	180	215	>300

Table 9 (Continued)

	Intermediate Layer $Gd_p(Fe_{100-q-r}Co_qCr_r)_{100-p}$						
	p (at%)	q (at%)	r (at%)	Film Thick- ness (nm)	Saturation Magnet- ization (emu/cc)	Compen- sation Temperature (C)	Curle Tempe- rature (C)
Experimental Example 37	37	0	0	10	450	-	190
Experimental Example 38	45	0	10	10	700	-	100
	25	0	0	10	-50	-	210
Experimental Example 39	37	0	0	10	470	-	190
	37	3	0	10	470	-	210
Comparative Example 14	-	-	-	-	-	-	-
Comparative Example 15	-	-	-	-	-	-	-

Table 9 (Continued)

	Memory Layer $Tb_a(Fe_{100-b}Co_b)_{100-a}$							C/N			Cross-talk
	a (at%)	b (at%)	Film Thickness (nm)	Saturation Magnetization (emu/cc)	Compensation Temperature ($^{\circ}C$)	Curie Temperature ($^{\circ}C$)	0.78 μm (dB)	0.40 μm (dB)	0.30 μm (dB)	0.78 μm (dB)	
Experimental Example 37	20	20	30	-250	-	270	50	45	39	-28	
Experimental Example 38	20	20	30	-250	-	270	49	42	34	-31	
	20	20	30	-250	-	270	49	43	35	-26	
Experimental Example 39	18	18	30	-300	-	270	50	45	39	-28	
	31	45	30	250	220	270	49	44	39	-30	
Comparative Example 14	20	20	80	-250	-	270	49	28	9	-22	
Comparative Example 15	20	20	30	-250	-	270	50	36	28	-31	

(Fifth Embodiment)

In a fifth embodiment, formation of a front mask in addition to a rear mask will be described, wherein a magnetic layer showing a perpendicular magnetic anisotropy at room temperature is used as the reproduction layer in the medium of the first embodiment.

In the fifth embodiment, the front mask is formed using an initializing magnet. Accordingly, this arrangement appears to be outside the object of the present invention. However, as compared with the conventional technique shown in Figs. 2A to 2C, wherein a front mask is formed using an initializing magnet and a rear mask is formed using a reproducing magnet, this embodiment is considered to be within the object of the present invention since only the initializing magnet is an external magnet so that a recorded mark equal to or smaller than the diffraction limit of light can be reproduced in high signal quality with a simple structure.

Hereinbelow, a magneto-optical recording medium according to the fifth preferred embodiment of the present invention and an information reproducing method using the medium will be described in detail hereinbelow with reference to the accompanying drawings.

The magneto-optical recording medium of the present invention has, on a translucent substrate, at least three magnetic layers, that is, a first magnetic layer, a third magnetic layer having a Curie temperature lower than those of the first magnetic layer and a second magnetic layer, and the second magnetic layer being a perpendicular magnetization film, in the order named from a side of the substrate (Fig. 58). Hereinbelow, the first magnetic layer will be referred to as a reproduction layer, the second magnetic layer as a memory layer and the third magnetic layer as an intermediate layer.

Further, for improvement, the medium may have a four-magnetic-layered structure by dividing the foregoing intermediate layer into two layers. In case of this four-magnetic-layered structure, the foregoing third magnetic layer is divided into two magnetic layers which will be referred to as first and second intermediate layers from the light incident side. Hereinafter, when referring to simply as "intermediate layer", it represents the intermediate layer of the three-magnetic-layered structure, and when referring to as "first intermediate layer" and "second intermediate layer", they represent the first intermediate layer and the second intermediate layer, respectively, of the four-magnetic-layered structure.

The reproduction layer is a layer for reproducing magnetization information held in the memory layer. The reproduction layer is located closer to a light incident side as compared with the intermediate layer and the memory layer, and its Curie temperature is set to be higher than those of the intermediate layer and the memory layer for preventing deterioration of a Kerr rotation angle upon reproduction. Further, it is necessary that a coercive force of the reproduction layer is smaller than that of the memory layer. Preferably, the reproduction layer has a small magnetic anisotropy, and a compensation temperature between room temperature and the Curie temperature. Further, a magnetization manner of the reproduction layer is such that the reproduction layer is a perpendicular magnetization film at room temperature and between room temperature and the Curie temperature. As a specific material of the reproduction layer, a material, for example, a rare earth-iron family amorphous alloy, such as, GdFeCo, GdTbFeCo, GdDyFeCo, NdGdFeCo or the like, mainly containing GdFeCo, is preferable since it has a high Curie temperature and a low coercive force and easily causes contraction of recorded magnetic domains in a high-temperature region, which is the prime aim of the present medium.

The intermediate layer is provided mainly for partly mediating and partly reducing or cutting off an exchange-coupling force from the memory layer to the reproduction layer. More specifically, the intermediate layer has a role to moderate an interface magnetic wall energy between the reproduction layer and the memory layer for realizing, with a smaller initializing magnetic field, formation of a mask (front mask) at a low-temperature region within a light spot by inverting magnetization of the reproduction layer in one direction at room temperature and for stably holding a magnetization state of each layer even when a magnetic wall is generated. The intermediate layer has a further role to mediate an exchange-coupling force between the reproduction layer and the memory layer so as to transfer magnetization information of the memory layer to the reproduction layer in an aperture region (medium-temperature region). The intermediate layer has a still further role to cut off the exchange-coupling force between the reproduction layer and the memory layer for forming a rear mask in a high-temperature region. Accordingly, the intermediate layer is located between the reproduction layer and the memory layer and has a Curie temperature which is set to be higher than room temperature and lower than those of the reproduction layer and the memory layer. The Curie temperature of the intermediate layer is set to be high enough to mediate the exchange-coupling force from the memory layer to the reproduction layer at a low-temperature portion and a medium-temperature portion within a light spot, but low enough to cut off the exchange-coupling force at a highest-temperature portion within the light spot, and thus preferably, 80°C or higher and 220°C or lower, and more preferably, 110°C or higher and 180°C or lower. When the reproduction layer has the compensation temperature between room temperature and the Curie temperature, the Curie temperature of the intermediate layer is set to a temperature within a range of, preferably, -100°C

to +50°C relative to the compensation temperature, and more preferably, -80°C to +20°C relative to the compensation temperature.

An in-plane anisotropy of the intermediate layer at room temperature is set to be greater than those of the reproduction layer and the memory layer at room temperature. This means that the magnetization of the intermediate layer is more liable to align in an in-plane direction as compared with those of the reproduction layer and the memory layer.

As a material of the intermediate layer, for example, a rare earth-iron family amorphous alloy, such as, GdFe, GdFeCo, GdTbFeCo, GdDyFeCo or the like is preferable. It is also effective to increase an effective in-plane anisotropy by increasing the saturation magnetization. This can reduce the interface magnetic wall energy between the first intermediate layer and the memory layer. A non-magnetic element, such as, Cr, Al, Si, Cu or the like may be added for lowering the Curie temperature.

Further, in order to improve the reproducing characteristic of the medium of the present invention, the foregoing intermediate layer may be divided into two magnetic layers as the first intermediate layer and the second intermediate layer, which are provided next to the reproduction layer from the light incident side. In this case, the first intermediate layer has a role to stably hold, at a low temperature, the magnetization state of the reproduction layer at a front mask region in the low-temperature region after initialization, and to cause contraction of the magnetic domain of the reproduction layer at the high-temperature region. In view of this, a perpendicular magnetic anisotropy of the first intermediate layer is set to be greater than that of the reproduction layer, in other words, a coercive force thereof is large. A Curie temperature of the first intermediate layer is set to be the same as the Curie temperature of the foregoing intermediate layer, which is lower than those of the other magnetic layers (reproduction layer, second intermediate layer, memory layer). As a material of the first intermediate layer, TbFe, TbFeCo, GdTbFeCo, GdDyFeCo, DyFe, DyFeCo, TbDyFeCo or the like is preferable. The second intermediate layer mainly has a role, as the foregoing intermediate layer, to moderate an interface magnetic wall energy between the reproduction layer and the memory layer for realizing, with a smaller initializing magnetic field, formation of a mask (front mask) at a low-temperature region within a light spot by inverting magnetization of the reproduction layer in one direction at room temperature and for stably holding a magnetization state of each layer even when a magnetic wall is generated. In view of this, an in-plane anisotropy of the second intermediate layer at room temperature is set to be greater than those of the first intermediate layer and the memory layer. As a material of the second intermediate layer, a material, such as, GdFe, GdFeCo, GdTbFeCo, GdDyFeCo or the like, mainly containing Gd, is preferable. It is also effective to increase an effective in-plane anisotropy by increasing the saturation magnetization. This can reduce the interface magnetic wall energy between the first intermediate layer and the memory layer.

The memory layer is a layer for storing recorded information and thus is required to stably hold the magnetic domains. As a material of the memory layer, a material which has a large perpendicular magnetic anisotropy and can stably hold a magnetization state, for example, a rare earth-iron family amorphous alloy, such as, TbFeCo, DyFeCo, TbDyFeCo or the like, garnet, a platinum family-iron family periodic structure film, such as, Pt/Co, Pd/Co or the like, or a platinum family-iron family alloy, such as, PtCo, PdCo or the like is preferable.

An element, such as, Al, Ti, Pt, Nb, Cr or the like may be added to the reproduction layer, the intermediate layer and the memory layer for improving their corrosion resistances. For enhancing the interference effect and the protective performance, a dielectric layer formed of SiN_x, AlO_x, TaO_x, SiO_x or the like may be provided in addition to the foregoing reproduction, intermediate and memory layers. Further, for improving thermal conductivity, a layer formed of Al, AlTa, AlTi, TiCr, Cu or the like and having good thermal conductivity may be provided. Further, an initialization layer in which magnetization is aligned in one direction for performing the optical modulation overwrite may be provided. Further, auxiliary layers for recording assistance and reproducing assistance may be provided to adjust the exchange-coupling force or the magnetostatic coupling force. Moreover, a protective coat formed of the foregoing dielectric layer or a polymer resin may be added as a protective film.

Since the recording process of this embodiment is the same as that in the first embodiment, explanation thereof will be omitted for brevity.

Now, the reproduction process of the present invention will be described hereinbelow.

In the present invention, the magnetic super resolution is realized by apparently and optically masking a partial region within the light spot without applying the external magnetic field. In the present medium, the front mask, the rear mask and the aperture are present within the light spot. These regions are divided by a temperature distribution within the light spot. Hereinbelow, structures of these masks and nature of the aperture will be described.

In the present invention, there are a medium formed of three magnetic layers and a medium formed of four magnetic layers. Explanation will be given to each of them. Hereinafter, Tm1 represents a boundary temperature between the front mask and the aperture, and Tm2 represents a boundary temperature between the

aperture and the rear mask.

(A) Three-Magnetic-Layered Structure (see Figs. 59A to 59C)

5 (a) Front Mask Region

First, the front mask to be formed in the low-temperature region will be described hereinbelow.

In the present medium, the magnetization of the reproduction layer is aligned in one direction by an initializing magnetic field to form a front mask region in advance before irradiation of a light beam.

10 Before irradiating the light beam, that is, when a medium temperature T is an ambient temperature T_a (room temperature), in order to align the magnetization of the reproduction layer in one direction, relation (30) should be established.

$$H_{c1} + H_{w1} < H_{ini} \quad (T = T_a) \quad (30)$$

15 wherein H_{c1} represents a coercive force of the reproduction layer, H_{w1} an effective magnetic field applied to the reproduction layer due to an interface magnetic wall between the reproduction layer and the memory layer, H_{ini} an initializing magnetic field.

Further, relation (31) should be established for preventing damage to the magnetization information of the memory layer due to the initializing magnetic field.

$$H_{c2} + H_{w2} > H_{ini} \quad (T = T_a) \quad (31)$$

20 wherein H_{w2} represents an effective magnetic field applied to the memory layer due to the interface magnetic wall between the reproduction layer and the memory layer.

If an interface magnetic wall energy between the reproduction layer and the memory layer is σ_{wi} , a saturation magnetization of the reproduction layer is M_{s1} , a saturation magnetization of the memory layer is M_{s2} , a film thickness of the reproduction layer is h_1 and a film thickness of the memory layer is h_2 , H_{w1} and H_{w2} are expressed by relations (32) and (33), respectively.

$$H_{w1} = \sigma_{wi} / (2M_{s1}h_1) \quad (32)$$

$$H_{w2} = \sigma_{wi} / (2M_{s2}h_2) \quad (33)$$

Further, relation (34) should be established for holding formation of the mask within the light spot after initialization and even when the medium temperature increases due to irradiation of the light beam.

$$30 \quad H_{w1} < H_{c1} \quad (T_a < T < T_{m1}) \quad (34)$$

(b) Aperture Region

35 The initialized reproduction layer reduces H_{c1} as the medium temperature T is raised due to irradiation of the light beam. When the effective magnetic field due to the interface magnetic wall becomes dominant, the magnetization of the reproduction layer is inverted so as to eliminate the interface magnetic wall. As a result, the magnetization information of the memory layer is transferred to the reproduction layer. A condition for this is expressed by relation (35).

$$H_{c1} < H_{w1} \quad (T_{m1} < T < T_{m2}) \quad (35)$$

40 In further detail, in addition to the effective magnetic field H_{wi} due to the exchange-coupling force from the memory layer 513, an effective magnetic field H_{wb} due to the Bloch magnetic wall energy and a static magnetic field H_d from the interior of the medium are applied to the recorded magnetic domain 1. H_{wi} works to stably hold the recorded magnetic domain 1 of the reproduction layer, while H_{wb} and H_d apply forces in directions to expand and contract the recorded magnetic domain. Accordingly, in order for the reproduction layer 511 to be stably transferred with the magnetization of the memory layer 513, a condition expressed by relation (36) should be satisfied before the recorded magnetic domain reaches the high-temperature region.

$$|H_{wb} - H_d| < H_{c1} + H_{w1} \quad (T_{m1} < T < T_{m2}) \quad (36)$$

45 The coercive force H_{c1} of the reproduction layer 511 is apparently increased due to the exchange-coupling force from the memory layer 513. Accordingly, relation (36) can be easily established to stably transfer the magnetization information of the memory layer 513 so that the recorded information can be reproduced accurately.

(c) Rear Mask Region

55 Since detail of the rear mask region (high-temperature region) is the same as that in the first embodiment, explanation thereof will be omitted for brevity.

(B) Four-Magnetic-Layered Structure (see Figs. 60A to 60C)

In the foregoing description, the intermediate layer is formed of one magnetic layer. On the other hand, the intermediate layer can be divided into two magnetic layers to improve the characteristic for performing reproduction more stably.

Specifically, the intermediate layer is divided into a first intermediate layer 5121 and a second intermediate layer 5122. For establishing relations (34) and (35) more reliably, the first intermediate layer 5121, which has a perpendicular magnetic anisotropy greater than and a Curie temperature lower than those of the reproduction layer, is provided between the reproduction layer and the memory layer, and the second intermediate layer 5122 is provided between the first intermediate layer and the memory layer for stabilizing the magnetic wall generated between the first intermediate layer and the memory layer.

At this time, a coercive force of the reproduction layer is apparently increased due to the first intermediate layer 5121. If a saturation magnetization of the first intermediate layer 5121 is M_{s1} , a coercive force thereof is H_{c1} , and a film thickness thereof is h_1 , an apparent coercive force H_{c1}' of the reproduction layer is expressed by relation (37).

$$H_{c1}' = (M_{s1}h_1H_{c1} + M_{s5}h_5H_{c5}) / (M_{s1}h_1 + M_{s5}h_5) \quad (37)$$

Further, H_{w1} becomes H_{w1}' expressed by relation (38).

$$H_{w1}' = \sigma_{wi} / (2M_{s1}h_1 + 2M_{s5}h_5) \quad (38)$$

Accordingly, at a low temperature, the coercive force of the reproduction layer becomes greater as compared with the case where the intermediate layer is not divided. Further, the effective magnetic field due to the interface magnetic wall becomes smaller. Thus, relation (34) can be established more stably.

When the temperature is further increased, since the Curie temperature of the first intermediate layer 5121 is low, the coercive force of the reproduction layer rapidly returns to the normal small state. Accordingly, relation (35) can also be established stably at the same time.

As described above, the four-magnetic-layered structure is capable of performing the super-resolution reproduction more stably as compared with the three-magnetic-layered structure.

The present invention will be described in further detail by way of experimental examples. However, the present invention is not limited to these experimental examples.

(Experimental Example 42)

Si, Gd, Tb, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate having a diameter of 130mm and a polycarbonate substrate with lands and grooves were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-5} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.4Pa, and thereafter, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 40nm thickness, a GdFe intermediate layer of 15nm thickness, a TbFeCo memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on the substrate in the order named, thus obtaining a sample with a structure shown in Fig. 61. Upon formation of each SiN dielectric layer, N_2 gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N_2 gases, so as to obtain a refractive index of 2.1.

The composition of the GdFeCo reproduction layer was set to represent RE rich at room temperature, a saturation magnetization M_s of 108emu/cc, a compensation temperature of 160°C and a Curie temperature of 300°C or more.

The composition of the GdFe intermediate layer was set to represent RE rich at room temperature, a saturation magnetization M_s of 420emu/cc and a Curie temperature of 190°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, a saturation magnetization M_s of -240emu/cc and a Curie temperature of 270°C.

Subsequently, the recording/reproduction characteristic was measured in the following manner, using this magneto-optical recording medium. Before reproduction, an initializing magnetic field of 3,000 Oe in a perpendicular direction was applied to the medium. The results are shown in Tables 10 to 14.

After recording a magnetic domain of a 0.78 μ m mark length in the magneto-optical recording medium, the magnetic domain was observed by a polarizing microscope under irradiation of a semiconductor laser beam of 830nm. While increasing the laser power, it was confirmed that the recorded magnetic domain was contracted and the magnetization was oriented in an erasing direction at the center (high-temperature region) of the light spot at a certain laser power.

Subsequently, the recording/reproduction characteristic was measured using this magneto-optical record-

ing medium. The measurement was performed by setting N.A. of an objective lens to be 0.55, a laser beam wavelength to be 780nm, a recording power to be in a range of 7k to 13mW and a reproducing power to be in a range of 2.5 to 3.5mW, so as to provide the highest C/N ratio. A linear velocity was set to be 9m/s. First, erasing was performed entirely on the medium, and thereafter, carrier signals of 5.8MHz, 11.3MHz and 15MHz (corresponding to mark lengths 0.78 μ m, 0.40 μ m and 0.30 μ m, respectively) were recorded in the memory layer so as to examine the mark-length dependency of C/N.

Subsequently, crosstalk with the adjacent tracks (hereinafter referred to as "crosstalk") was measured. Specifically, after recording a signal of a 0.78 μ m mark length on the land as in the foregoing manner and measuring a carrier level C1, a carrier level C2 was similarly measured upon tracking the adjacent groove where data had been erased, and the crosstalk was represented by a ratio (C2/C1). Since the experiment was performed on the assumption that data were recorded on both the land and groove, an effective track pitch was 0.8 μ m. Both the C/N ratios and the crosstalk were measured without applying an initializing magnetic field and a reproducing magnetic field. Tables 10 to 14 show compositions and materiality values of each layer and the results of the C/N ratios and the crosstalk.

(Experimental Example 43)

Using the same apparatus and method as in Experimental Example 42, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 40nm thickness, a TbFeCoCr intermediate layer of 11nm thickness, a GdFeCo auxiliary layer of 15nm thickness, a TbFeCo memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining a sample with a structure shown in Fig. 62. Upon formation of each SiN dielectric layer, N₂ gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N₂ gases, so as to obtain a refractive index of 2.1.

The composition of the GdFeCo reproduction layer was set to represent RE rich at room temperature, a saturation magnetization Ms of 160emu/cc, a compensation temperature of 180°C and a Curie temperature of 300°C or more.

The composition of the TbFeCoCr first intermediate layer was set to represent TM rich at room temperature, a saturation magnetization Ms of -160emu/cc and a Curie temperature of 150°C.

The composition of the GdFeCo second intermediate layer was set to represent TM rich at room temperature, a saturation magnetization Ms of -160emu/cc and a Curie temperature of 300°C or more.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, a saturation magnetization Ms of -240emu/cc and a Curie temperature of 270°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was evaluated as in Experimental Example 42. Before reproduction, an initializing magnetic field of 3,000 Oe in a perpendicular direction was applied to the medium. The results are shown in Tables 10 to 14.

(Experimental Example 44)

Using the same apparatus and method as in Experimental Example 42, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 32nm thickness, a TbFeCo intermediate layer of 11nm thickness, a GdFeCo auxiliary layer of 16nm thickness, a TbFeCo memory layer of 30nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining a sample with a structure shown in Fig. 62.

The composition of the GdFeCo reproduction layer was set to represent RE rich at room temperature, a saturation magnetization Ms of 170emu/cc, a compensation temperature of 205°C and a Curie temperature of 300°C or more.

The composition of the TbFeCo first intermediate layer was set to represent TM rich at room temperature, a saturation magnetization Ms of -180emu/cc and a Curie temperature of 145°C.

The composition of the GdFeCo second intermediate layer was set to represent TM rich at room temperature, a saturation magnetization Ms of -160emu/cc and a Curie temperature of 300°C or more.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, a saturation magnetization Ms of -150emu/cc and a Curie temperature of 230°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was evaluated as in Experimental Example 42. Before reproduction, an initializing magnetic field of 3,000 Oe in a perpendicular direction was applied to the medium. The results are shown in Tables 10 to 14.

Now, the known super-resolution magneto-optical recording medium was prepared, and evaluation thereof was performed in the same manner as in the foregoing experimental examples.

(Comparative Example 16)

First, a medium the same as that described in Japanese Patent Application Laid-open No. 3-93056 was prepared and evaluated.

Using the same film forming apparatus and method as in Experimental Example 42, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 30nm thickness, a TbFeCoAl intermediate layer of 10nm thickness, a TbFeCo memory layer of 40nm thickness and an SiN protective layer of 70nm thickness were formed on a glass substrate in the order named, thus obtaining the magneto-optical recording medium of Comparative Example 16.

The composition of the GdFeCo reproduction layer was set to represent TM rich at room temperature, Ms of -180emu/cc and a Curie temperature of 300°C or more.

The composition of the TbFeCoAl intermediate layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 140°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -240emu/cc and a Curie temperature of 260°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was measured as in Experimental Example 42. In this case, however, upon reproduction, a reproducing magnetic field was applied to the medium in a perpendicular direction, by changing a magnitude of the reproducing magnetic field between 0 Oe, 200 Oe and 400 Oe. The results are shown in Tables 10 to 14. The conventional non-super-resolution medium, such as, the medium having only the memory layer, showed data similar to the reproduction characteristic (C/N, crosstalk) obtained in the medium of this comparative example when the reproducing magnetic field is 0.

(Comparative Example 17)

Next, a medium the same as that described in Japanese Patent Application Laid-open No. 3-255946 was prepared and evaluated. In this case, the intermediate layer was divided into two layers for improving the characteristic.

Using the same film forming apparatus and method as in Experimental Example 42, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 30nm thickness, a TbFeCoAl first intermediate layer of 10nm thickness, a GdFeCo second intermediate layer of 16nm, a TbFeCo memory layer of 40nm thickness and an SiN protective layer of 70nm thickness were formed on a glass substrate in the order named, thus obtaining the magneto-optical recording medium of Comparative Example 17.

The composition of the GdFeCo reproduction layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 300°C or more.

The composition of the TbFeCoAl first intermediate layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 140°C.

The composition of the GdFeCo second intermediate layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 280°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -240emu/cc and a Curie temperature of 260°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was measured as in Experimental Example 42. In this case, however, prior to reproduction, an initializing magnetic field of 3,000 Oe in a perpendicular direction was applied to the medium, and a reproducing magnetic field was applied to the medium by changing a magnitude of the reproducing magnetic field between 0 Oe, 200 Oe and 400 Oe. The results are shown in Tables 10 to 14.

According to the measurement results of the foregoing Experimental Examples 42 to 44, particularly to the measurement results with the short mark lengths, in any of the mediums, the high C/N ratios were obtained with the short mark lengths without applying the reproducing magnetic field. Further, the improvement in crosstalk was also observed along with C/N. On the other hand, in the medium of Comparative Example 16, the sufficiently high C/N ratio was not obtained without applying the reproducing magnetic field of 400 Oe. Further, the crosstalk showed the bad results. On the other hand, in the medium of Comparative Example 17, no improvement in C/N and crosstalk was observed without applying the sufficient reproducing magnetic field.

Accordingly, in the magneto-optical recording medium of the present invention, both the C/N ratio and the crosstalk can be improved without applying the reproducing magnetic field or without applying the reproducing magnetic field. Thus, both the line recording density and the track density can be improved.

Table 10

	Reproduction Layer				
	Composition at%	Film Thickness Å	Ms emu/cc	Tcomp ° C	Tc ° C
Experimental Example 42	Gd ₂₆ (Fe ₆₁ Co ₃₉) ₇₄	400	108	160	300<
Experimental Example 43	Gd ₂₈ (Fe ₆₅ Co ₃₅) ₇₂	400	160	180	300<
Experimental Example 44	Gd ₂₈ (Fe ₆₀ Co ₄₀) ₇₂	400	170	205	300<
Comparative Example 16	Gd ₂₀ (Fe ₇₅ Co ₂₅) ₈₀	300	-180	-	300<
Comparative Example 17	Gd ₂₁ (Fe ₇₅ Co ₂₅) ₇₉	300	-160	-	300<

Table 11

	Intermediate Layer or First Intermediate Layer				
	Composition at%	Film Thickness Å	Ms emu/cc	Tcomp ° C	Tc ° C
Experimental Example 42	Gd ₃₈ Fe ₆₂	150	420	-	190
Experimental Example 43	Tb ₁₈ (Fe ₈₄ Co ₁₀ Cr ₆) ₈₂	110	-160	-	150
Experimental Example 44	Tb ₂₀ (Fe ₉₆ Co ₄) ₈₀	110	-180	-	145
Comparative Example 16	Tb ₁₈ (Fe ₉₀ Co ₅ A ₁₅) ₈₂	100	-160	-	140
Comparative Example 17	Tb ₁₈ (Fe ₉₀ Co ₅ A ₁₅) ₈₂	100	-160	-	140

Table 12

	Second Intermediate Layer				
	Composition at%	Film Thickness Å	Ms emu/cc	Tcomp ° C	Tc ° C
Experimental Example 43	Gd ₂₂ (Fe ₆₀ Co ₄₀) ₇₈	150	-160	-	300<
Experimental Example 44	Gd ₂₁ (Fe ₆₀ Co ₄₀) ₇₉	160	-160	-	300<
Comparative Example 17	Gd ₂₂ (Fe ₆₀ Co ₄₀) ₇₈	160	-160	-	280

Table 13

	Memory Layer				
	Composition at%	Film Thickness Å	Ms emu/cc	Tcomp ° C	Tc ° C
Experimental Example 42	Tb20(Fe80Co20)80	300	-240	-	260
Experimental Example 43	Tb20(Fe80Co20)80	300	-240	-	260
Experimental Example 44	Tb20(Fe80Co20)80	300	-240	-	260
Comparative Example 16	Tb20(Fe80Co20)80	300	-240	-	260
Comparative Example 17	Tb20(Fe80Co20)80	300	-240	-	260

Table 14

	Initializing Magnetic Field Oe	Reproducing Magnetic Field Oe	C/N			Crosstalk
			0.78μm dB	0.40μm dB	0.30μm dB	0.78μm dB
Experimental Example 42	3000	0	48	41	33	-30
Experimental Example 43	3000	0	48	44	38	-37
Experimental Example 44	3000	0	49	45	38	-36
Comparative Example 16	0	0	48	18	5	-12
Comparative Example 17	0	200	48	30	18	-13
	0	400	48	45	36	-19
	3000	0	48	21	2	-15
	3000	200	48	30	20	19
	3000	400	48	45	34	-39

(Sixth Embodiment)

In the foregoing embodiments, the information in the memory layer is transferred to the reproduction layer in the medium-temperature region or in the low-temperature and medium-temperature regions, using the exchange-coupling force. On the other hand, in the sixth embodiment, the information in the memory layer is transferred to the reproduction layer in those regions, using the magnetostatic coupling force.

Hereinbelow, a magneto-optical recording medium according to the sixth preferred embodiment of the present invention and an information reproducing method using the medium will be described in detail here-

inbelow with reference to the accompanying drawings.

The magneto-optical recording medium of the present invention has, on a translucent substrate, at least two magnetic layers, that is, a reproduction layer and a memory layer being a perpendicular magnetization film (Fig. 63A).

5 The reproduction layer is a layer for reproducing magnetization information held in the memory layer. The reproduction layer is located closer to a light incident side as compared with the memory layer, and its Curie temperature is set to be higher than that of the memory layer for preventing deterioration of a Kerr rotation angle upon reproduction. Further, it is necessary that a coercive force of the reproduction layer is smaller than that of the memory layer. Moreover, it is necessary that the reproduction layer has a compensation temperature
10 between room temperature and a Curie temperature of the memory layer. This is because, in the present medium, upon reproduction, a high-temperature region within the light spot is increased to a temperature which exceeds the compensation temperature of the reproduction layer, so as to form the rear mask for performing the super-resolution reproduction. Accordingly, if the Curie temperature of the memory layer is equal to or lower than the compensation temperature of the reproduction layer, the magnetization information of the memory layer is damaged upon reproduction so that the effect of the present invention can not be achieved. The Curie temperature of the memory layer is set to be higher than the compensation temperature of the reproduction layer, preferably, by 10°C or more, and more preferably, by 20°C or more. On the other hand, if it is set to be too high, the recording by the laser beam can not be easily performed. In view of this, the Curie temperature of the memory layer is set to be, preferably, no more than 280°C, and more preferably, no more than 240°C.
20 In other words, the compensation temperature of the reproduction layer is set to be, preferably, no more than 270°C, and more preferably, no more than 230°C.

On the other hand, a magnetization manner of the reproduction layer is such that the reproduction layer is a perpendicular magnetization film at room temperature and between room temperature and its Curie temperature, or the reproduction layer is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film between room temperature and its compensation temperature. As a specific material of the reproduction layer, a material, for example, a rare earth-iron family amorphous alloy, such as, GdFeCo, GdTbFeCo, GdDyFeCo, NdGdFeCo or the like, mainly containing GdFeCo, is preferable since it has a high Curie temperature and a low coercive force and easily causes contraction of recorded magnetic domains in a high-temperature region, which is the prime aim of the present medium.

30 When using GdFeCo for the reproduction layer, the compensation temperature largely depends on, particularly, the composition of rare earth element (Gd). Thus, when using a magnetic layer mainly containing GdFeCo as the reproduction layer, it is preferable that Gd content is set to be 24 to 35 at %.

The memory layer is a layer for storing recorded information and thus is required to stably hold the magnetic domains. As a material of the memory layer, a material which has a large perpendicular magnetic anisotropy and can stably hold a magnetization state, for example, a rare earth-iron family amorphous alloy, such as, TbFeCo, DyFeCo, TbDyFeCo or the like, is preferable.

Further, it is necessary that a compensation temperature of the memory layer is set to be, at least, lower than a temperature where the reproduction layer is magnetostatically coupled with the memory layer. This is because, in the present invention, since, upon reproduction, a high-temperature region within the light spot is increased to a temperature which exceeds the compensation temperature of the reproduction layer, so as to invert the net magnetization of the reproduction layer in an opposite direction as compared with the reproduction layer at an aperture region, thereby causing the reproduction layer and the memory layer to be in an anti-magnetostatic coupling state to form the rear mask, it is necessary for the memory layer to hold the same magnetization state in a transfer region and a rear mask region.

45 For example, when using ferrimagnetic rare earth-iron family element amorphous alloy films for the reproduction layer and the memory layer, it may be arranged that the reproduction layer is rare earth element sublattice magnetization dominant at room temperature and the memory layer is iron family element sublattice magnetization dominant at room temperature, or both the reproduction layer and the memory layer are rare earth element sublattice magnetization dominant at room temperature. Since it is easy to realize the foregoing structure by using the ferrimagnetic rare earth-iron family element amorphous alloy film, this film is preferable for the medium of the present invention.

Between the foregoing reproduction and memory layers, the exchange-coupling force is cut off and the magnetostatic coupling force is exerted over a temperature range from room temperature to a high temperature. For realizing this, it is necessary that the reproduction layer is rare earth element sublattice magnetization dominant at room temperature and the memory layer is iron family element sublattice magnetization dominant at room temperature. Further, for cutting off the exchange-coupling force working between the reproduction layer and the memory layer over the temperature range from room temperature to a high temperature, it is effective to prevent the exchange-coupling force from acting at the interface by the plasma processing after
55

formation of the reproduction layer and until formation of the memory layer, or to provide an intermediate layer between the reproduction layer and the memory layer for cutting off the exchange-coupling force (Fig. 63B). A non-metal layer, such as, a dielectric, a non-magnetic metal layer, a magnetic layer formed of an in-plane magnetization film or the like is preferable as the intermediate layer. By providing such an intermediate layer, the exchange force can be cut off more reliably as compared with the foregoing plasma processing method.

An element, such as, Al, Ti, Pt, Nb, Cr or the like may be added to the reproduction layer and the memory layer for improving their corrosion resistances. For enhancing the interference effect and the protective performance, a dielectric layer formed of SiN_x , AlO_x , TaO_x , SiO_x or the like may be provided in addition to the foregoing reproduction and memory layers. Further, for improving thermal conductivity, a layer formed of Al, AlTi, AlTi, TiCr, Cu or the like and having good thermal conductivity may be provided. Further, an initialization layer in which magnetization is aligned in one direction for performing the optical modulation overwrite may be provided. Further, auxiliary layers for recording assistance and reproducing assistance may be provided to adjust the exchange-coupling force or the magnetostatic coupling force. Moreover, a protective coat formed of the foregoing dielectric layer or a polymer resin may be added as a protective film.

Since the recording process of this embodiment is the same as that in the foregoing embodiments, explanation thereof will be omitted for brevity.

Now, the reproduction process of the present invention will be described hereinbelow.

In the present invention, the magnetic super resolution is realized by apparently and optically masking a partial region within the light spot without applying the external magnetic field. Figs. 65A, 65B and 65C are diagrams showing a process, wherein the recorded magnetic domain of the reproduction layer transferred from the memory layer (hereinbelow simply referred to as "recorded magnetic domain") is contracted in the high-temperature region while the light spot moves. For brevity, in Figs. 65A to 65C, the contracting process of only one recorded magnetic domain is shown. Further, in these figures, a rare earth-iron family ferrimagnetic substance is used as a magnetic material, blank arrows 630 represent the whole magnetization, black arrows 631 represent the iron family sublattice magnetization, the reproduction layer 611 is an RE rich magnetic layer and the memory layer 613 is a TM rich magnetic layer. On the other hand, in Figs. 64A to 64C, the whole image upon reproduction is shown along with the temperature distribution. In Fig. 64B, blank arrows represent the whole magnetization and black arrows represent the iron family sublattice magnetization, like in Figs. 65A to 65C.

The temperature distribution of the medium is shifted from the center of the light spot in a direction opposite to a moving direction of the light spot due to the limit of thermal conductivity. As shown in Fig. 65A, shortly after the light spot 602 has reached the recorded magnetic domain 601, the recorded magnetic domain 601 does not reach the high-temperature region 605. In addition to a magnetic field H_{st} due to the magnetostatic coupling force from the memory layer 613, an effective magnetic field H_{wb} due to the Bloch magnetic wall energy and a static magnetic field H_{leak} from another region of the reproduction layer are applied to the recorded magnetic domain 601. H_{st} works to stably hold the recorded magnetic domain 601 of the reproduction layer, while H_{wb} applies a force in a direction to contract the recorded magnetic domain. Accordingly, in order for the reproduction layer 611 to be stably transferred with the magnetization of the memory layer 613, a condition expressed by relation (39) should be satisfied before the recorded magnetic domain 601 reaches the high-temperature region 605.

$$|H_{wb} \pm H_{leak}| < H_{c1} + H_{st} (T < T_h - \text{mask}) \quad (39)$$

If a Bloch magnetic wall energy is σ_{wb} and a radius of the recorded magnetic domain 601 of the reproduction layer 611 is r , H_{wb} is expressed by relation (40) and works in a direction to contract the recorded magnetic domain 601 (Fig. 66).

$$H_{wb} = \sigma_{wb} / 2Ms_1r \quad (40)$$

When the light spot further moves so that the recorded magnetic domain 601 enters the high-temperature region where a temperature reaches equal to or higher than the compensation temperature of the reproduction layer, the net magnetization of the reproduction layer orients reversely. As result, the recorded magnetic domain is applied with an anti-parallel magnetostatic force from the memory layer. Accordingly, H_{st} works to invert the recorded magnetic domain like H_{wb} . Fig. 66 shows a state of the magnetic field applying to the magnetic domain just before contraction. Practically, the magnetic wall moves from the high-temperature side to cause contraction of the magnetic domain as shown in Fig. 66. Accordingly, relation (41) is established so that the Bloch magnetic wall 608 of the recorded magnetic domain 601 moves in a direction to contract the magnetic domain.

$$H_{wb} + H_{st} \pm H_{leak} > H_{c1} (T > T_h - \text{mask}) \quad (41)$$

As shown in Fig. 65B, when entering the high-temperature region 605, the recorded magnetic domain 601 contracts to be inverted so that, finally, as shown in Fig. 65C, the magnetization is all aligned in the erasing direction. "Th-mask" shown in relations (40) and (41) and in Fig. 64C is equal to the compensation temperature

of the reproduction layer.

Further, the static magnetic field H_{st} from the memory layer 613 also works on the magnetization in the erasing direction. However, if the magnetization in the erasing direction is inverted by H_{st} , a magnetic wall is formed over an extensive range of the high-temperature region 605 so that the magnetic wall energy is largely increased. Accordingly, the magnetization inversion does not occur, and the magnetization in the erasing direction is held. Thus, in the high-temperature region 605, a region is generated in which magnetization is always oriented in the erasing direction. This region becomes the rear mask 605. If a radius of the inverted magnetic domain is R , an effective magnetic field H_{wb}' of the Bloch magnetic wall energy in case of the erasing magnetization being inverted is expressed by relation (42).

$$H_{wb}' = \sigma_{wb}/2Ms1R \quad (42)$$

Thus, a condition that the erasing magnetization is not inverted by H_{st} is expressed by relation (43).

$$H_{wb}' > H_{st} \quad (43)$$

Specifically, as shown in Figs. 64A to 64C, since the reproduction layer 611 always becomes a perpendicular magnetization film orienting in the erasing direction at the high-temperature region 605 within the light spot 602, thus serving as an optical mask (rear mask 605). Accordingly, as shown in Fig. 64A, the light spot 602 is apparently narrowed to a region excluding the high-temperature region 605 and serving as the aperture region 603 so that the recorded magnetic domain (recorded mark) having a period equal to or smaller than the detection limit can be detected.

In the foregoing, the light spot region other than the high-temperature region becomes all the aperture region. On the other hand, when the reproduction layer is formed of a magnetic layer which, in addition to the foregoing condition, is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film between room temperature and the compensation temperature, not only the high-temperature region in the light spot, but also the low-temperature region in the light spot can be masked.

Specifically, in the low-temperature region where a temperature is around room temperature, the magnetization information of the memory layer is masked by the reproduction layer in the form of an in-plane magnetization film. On the other hand, in the medium-temperature region where the reproduction layer becomes a perpendicular magnetization film, the magnetization information of the memory layer is transferred to the reproduction layer due to the magnetostatic coupling so as to be reproduced. Further, in the high-temperature region, the magnetization information of the memory layer is masked through the foregoing mechanism. The super resolution of such a double-mask type can improve not only the line recording density, but also the track density.

The present invention will be described in further detail by way of experimental examples. However, the present invention is not limited to these experimental examples.

First, a magneto-optical recording medium in which a reproduction layer is a perpendicular magnetization film at room temperature and between room temperature and a Curie temperature was prepared and evaluated, which will be described in the following Experimental Examples 45 and 46.

(Experimental Example 45)

Si, Gd, Tb, Fe and Co targets were attached to a DC magnetron sputtering apparatus, and a glass substrate having a diameter of 130mm and a polycarbonate substrate with lands and grooves were fixed to a substrate holder which was set at a position separated from the respective targets by a distance of 150mm. Thereafter, the interior of the chamber was evacuated by a cryopump to a high vacuum of 1×10^{-5} Pa or less. During the evacuation, Ar gas was introduced into the chamber to 0.4Pa, and thereafter, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 40nm thickness, an SiN intermediate layer of 10nm thickness, a TbFeCo memory layer of 35nm thickness and an SiN protective layer of 70nm thickness were formed in the order named, thus obtaining the magneto-optical recording medium of the present invention with a structure shown in Fig. 67. Upon formation of each SiN dielectric layer, N_2 gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N_2 gases, so as to obtain a refractive index of 2.1.

The composition of the GdFeCo reproduction layer was $Gd_{24}(Fe_{66}Co_{32})_{76}$ and represented RE rich at room temperature, M_s of 120emu/cc, a compensation temperature of 200°C and a Curie temperature of 300°C or more. This reproduction layer was a perpendicular magnetization film at room temperature.

The composition of the TbFeCo memory layer was $Tb_{20}(Fe_{80}Co_{20})_{80}$ and represented TM rich at room temperature, M_s of -230emu/cc and a Curie temperature of 250°C.

Evaluation was performed in the following manner using the present medium.

First, after recording a magnetic domain of a 0.78 μ m mark length in the magneto-optical recording medium, the magnetic domain was observed by a polarizing microscope under irradiation of a semiconductor laser beam

of 780nm. While increasing the laser power, it was confirmed that the transferred recorded magnetic domain was contracted and the magnetization was oriented in an erasing direction at the center (high-temperature region) of the light spot at a certain laser power.

Subsequently, the recording/reproduction characteristic was measured using this magneto-optical recording medium. The measurement was performed by setting N.A. of an objective lens to be 0.55, a laser beam wavelength to be 780nm, a recording power to be in a range of 7 to 13mW and a reproducing power to be in a range of 3.0 to 4.0mW, so as to provide the highest C/N ratio. A linear velocity was set to be 9m/s. First, erasing was performed entirely on the medium, and thereafter, carrier signals of 5.8MHz, 11.3MHz and 15MHz (corresponding to mark lengths 0.78 μ m, 0.40 μ m and 0.30 μ m, respectively) were recorded in the memory layer so as to examine the mark-length dependency of C/N.

Subsequently, crosstalk with the adjacent tracks (hereinafter referred to as "crosstalk") was measured. Specifically, after recording a signal of a 0.78 μ m mark length on the land as in the foregoing manner and measuring a carrier level C1, a carrier level C2 was similarly measured upon tracking the adjacent groove where data had been erased, and the crosstalk was represented by a ratio (C2/C1). Since the experiment was performed on the assumption that data were recorded on both the land and groove, an effective track pitch was 0.8 μ m.

Both the C/N ratios and the crosstalk were measured without applying an initializing magnetic field and a reproducing magnetic field. The results are shown in Table 15. It is seen that, although the crosstalk was not improved, a high value was obtained for C/N with the short mark length.

(Experimental Example 46)

A magneto-optical recording medium the same as that in Experimental Example 45 was prepared, except that the intermediate layer was omitted and that the memory layer was formed after the substrate was plasma-processed (the substrate was reverse-sputtered with RF of 300W) with a very small amount of O₂ gas being introduced after formation of the reproduction layer. Also in this medium, the exchange coupling between the reproduction layer and the memory layer was cut off so that the super resolution effect was achieved without using the reproducing magnetic field. This magneto-optical recording medium was evaluated as in Experimental Example 45. The results are shown in Table 15. It is seen that, although the crosstalk was not improved, a high value was obtained for C/N with the short mark length.

(Experimental Example 47)

Using the same apparatus and method as in Experimental Example 45, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 40nm thickness, an SiN intermediate layer of 10nm thickness, a TbFeCo memory layer of 35nm thickness and an SiN protective layer of 70nm thickness were formed on a polycarbonate substrate in the order named, thus obtaining the magneto-optical recording medium of the present invention with a structure shown in Fig. 67. Upon formation of each SiN dielectric layer, N₂ gas was introduced in addition to the Ar gas, and the SiN layer was formed by DC reactive sputtering, adjusting a mixing ratio of the Ar and N₂ gases, so as to obtain a refractive index of 2.1.

The composition of the GdFeCo reproduction layer was Gd₂₈(Fe₆₀Co₄₀)₇₂ and represented RE rich at room temperature, Ms of 220emu/cc, a compensation temperature of 217°C and a Curie temperature of 300°C or more. This reproduction layer was an in-plane magnetization film at room temperature and became a perpendicular magnetization film at about 140°C.

The composition of the TbFeCo memory layer was Tb₂₀(Fe₈₀Co₂₀)₈₀ and represented TM rich at room temperature, Ms of -230emu/cc and a Curie temperature of 250°C.

This magneto-optical recording medium was evaluated as in Experimental Example 45. The results are shown in Table 15. It is seen that, since the low-temperature region was masked by an in-plane magnetization film, the crosstalk was also improved along with C/N.

Now, the known super-resolution magneto-optical recording medium was prepared, and evaluation thereof was performed in the same manner as in the foregoing experimental examples.

(Comparative Example 18)

First, a medium the same as that described in Japanese Patent Application Laid-open No. 3-93056 was prepared and evaluated.

Using the same film forming apparatus and method as in Experimental Example 45, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 30nm thickness, a TbFeCoAl intermediate layer of

10nm thickness, a TbFeCo memory layer of 40nm thickness and an SiN protective layer of 70nm thickness were formed on a glass substrate in the order named, thus obtaining the magneto-optical recording medium of Comparative Example 18.

The composition of the GdFeCo reproduction layer was set to represent TM rich at room temperature, Ms of -180emu/cc and a Curie temperature of 300°C or more.

The composition of the TbFeCoAl intermediate layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 140°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -150emu/cc and a Curie temperature of 250°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was measured as in Experimental Example 45. In this case, however, upon reproduction, a reproducing magnetic field was applied to the medium in a perpendicular direction, by changing a magnitude of the reproducing magnetic field between 0 Oe, 200 Oe and 400 Oe. The results are shown in Table 15.

(Comparative Example 19)

Next, a medium the same as that described in Japanese Patent Application Laid-open No. 3-255946 was prepared and evaluated.

Using the same film forming apparatus and method as in Experimental Example 45, an SiN interference layer of 90nm thickness, a GdFeCo reproduction layer of 30nm thickness, a TbFeCoAl intermediate layer of 10nm thickness, a GdFeCo auxiliary layer of 16nm, a TbFeCo memory layer of 40nm thickness and an SiN protective layer of 70nm thickness were formed on a glass substrate in the order named, thus obtaining the magneto-optical recording medium of Comparative Example 19.

The composition of the GdFeCo reproduction layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 300°C or more.

The composition of the TbFeCoAl intermediate layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 140°C.

The composition of the GdFeCo auxiliary layer was set to represent TM rich at room temperature, Ms of -160emu/cc and a Curie temperature of 280°C.

The composition of the TbFeCo memory layer was set to represent TM rich at room temperature, Ms of -150emu/cc and a Curie temperature of 250°C.

Subsequently, using this magneto-optical recording medium, the recording/reproduction characteristic was measured as in Experimental Example 45. In this case, however, prior to reproduction, an initializing magnetic field in a perpendicular direction was applied to the medium by changing a magnitude of the initializing magnetic field between 0 Oe, 1,000 Oe and 2,000 Oe, and a reproducing magnetic field was applied to the medium by changing a magnitude of the reproducing magnetic field between 0 Oe, 200 Oe and 400 Oe. The results are shown in Table 15.

Accordingly, in the magneto-optical recording medium of the present invention, the C/N ratio or both the C/N ratio and the crosstalk can be improved without applying the reproducing magnetic field or without applying both the initializing magnetic field and the reproducing magnetic field. Thus, the line recording density or both the line recording density and the track density can be improved.

Table 15

5				C/N			Crosstalk
		Initializing Magnetic Field	Reproducing Magnetic Field	0.78 μ m	0.40 μ m	0.30 μ m	0.78 μ m
		Oe	Oe	dB	dB	dB	dB
10	Experimental Example 45	0	0	48	44	35	-15
	Experimental Example 46	0	0	48	41	33	-14
15	Experimental Example 47	0	0	49	44	35	-30
	Comparative Example 18	0	0	48	18	5	-12
20		0	200	48	30	18	-13
		0	400	48	44	36	-19
25	Comparative Example 19	0	0	48	21	2	-15
		1000	400	48	26	8	-17
		2000	400	48	29	13	-19
30		3000	200	48	30	20	19
		3000	400	48	44	34	-30

35 Claims

1. A magneto-optical recording medium comprising:
 - a substrate;
 - a first magnetic layer laminated on said substrate for reproducing information;
 - a second magnetic layer laminated on said first magnetic layer for storing the information; and
 - a third magnetic layer disposed between said first and second magnetic layers and having a Curie temperature lower than Curie temperatures of said first and second magnetic layers,
 wherein a direction of magnetization of a region of said first magnetic layer, said region being adjacent to a region of said third magnetic layer where a temperature is equal to or higher than the Curie temperature of said third magnetic layer, is oriented in a direction of magnetization around said region of said first magnetic layer.
2. The magneto-optical recording medium as set forth in claim 1, wherein said first magnetic layer has a compensation temperature between room temperature and its Curie temperature.
3. The magneto-optical recording medium as set forth in claim 1, wherein said first magnetic layer is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film when increased in temperature.
4. The magneto-optical recording medium as set forth in claim 1, wherein said first magnetic layer is a perpendicular magnetization film over a range from room temperature to its Curie temperature.

5. The magneto-optical recording medium as set forth in claim 2, wherein the Curie temperature of said second magnetic layer is lower than the Curie temperature of said first magnetic layer.
6. The magneto-optical recording medium as set forth in claim 2, wherein the Curie temperature of said third magnetic layer is around the compensation temperature of said first magnetic layer.
7. The magneto-optical recording medium as set forth in claim 3, wherein a film thickness of said first magnetic layer is no less than 20nm and no more than 100nm.
8. The magneto-optical recording medium as set forth in claim 3, wherein a film thickness of said third magnetic layer is no less than 3nm and no more than 30nm.
9. The magneto-optical recording medium as set forth in claim 3, wherein said first magnetic layer is mainly formed of GdFeCo.
10. The magneto-optical recording medium as set forth in claim 3, wherein said third magnetic layer is mainly formed of one of GdFe and GdFeCo.
11. The magneto-optical recording medium as set forth in claim 3, wherein said third magnetic layer is an in-plane magnetization film at room temperature and becomes a perpendicular magnetization film when increased in temperature.
12. The magneto-optical recording medium as set forth in claim 11, wherein an in-plane anisotropy of said third magnetic layer at room temperature is greater than an in-plane anisotropy of said first magnetic layer at room temperature.
13. The magneto-optical recording medium as set forth in claim 1, wherein each of said first and second magnetic layers is formed of a ferrimagnetic rare earth-iron family element amorphous alloy.
14. The magneto-optical recording medium as set forth in claim 13, wherein said first magnetic layer is rare earth rich at room temperature and said second magnetic layer is iron family rich at room temperature, and vice versa.
15. The magneto-optical recording medium as set forth in claim 9, wherein said first magnetic layer has the following composition:

$$\text{Gd}_x(\text{Fe}_{100-y}\text{Co}_y)_{100-x}, \text{ wherein } 24 \leq x \leq 32 \text{ and } 20 \leq y \leq 50.$$
16. The magneto-optical recording medium as set forth in claim 10, wherein said third magnetic layer has the following composition:

$$\text{Gd}_x(\text{Fe}_{100-y}\text{Co}_y)_{100-x}, \text{ wherein } 25 \leq x \leq 50 \text{ and } 0 \leq y \leq 20.$$
17. The magneto-optical recording medium as set forth in claim 1, wherein said second magnetic layer contains one of TbFe, TbFeCo, DyFe and DyFeCo as a main component.
18. The magneto-optical recording medium as set forth in claim 17, wherein said second magnetic layer has the following composition:

$$\text{Tb}_x(\text{Fe}_{100-y}\text{Co}_y)_{100-x}, \text{ wherein } 14 \leq x \leq 33 \text{ and } 14 \leq y \leq 45.$$
19. The magneto-optical recording medium as set forth in claim 6, wherein the compensation temperature T_{comp} of said first magnetic layer and the Curie temperature T_3 of said third magnetic layer satisfy the following relation:

$$-20^\circ\text{C} \leq T_{\text{comp}} - T_3 \leq 80^\circ\text{C}$$
20. The magneto-optical recording medium as set forth in claim 1, wherein a saturation magnetization M_{s1} of said first magnetic layer satisfies the following relation at room temperature:

$$20\text{emu/cc} \leq M_{s1} \leq 340\text{emu/cc}$$
21. The magneto-optical recording medium as set forth in claim 1, wherein a saturation magnetization M_{s2}

of said second magnetic layer satisfies the following relation when being rare earth rich at room temperature:

$$Ms2 \leq 250 \text{emu/cc}$$

and the following relation when being iron family rich at room temperature:

$$Ms2 \leq 350 \text{emu/cc}$$

22. The magneto-optical recording medium as set forth in claim 1, wherein a saturation magnetization $Ms3$ of said third magnetic layer satisfies the following relation when being rare earth rich at room temperature:

$$Ms3 \leq 700 \text{emu/cc}$$

and the following relation when being iron family rich at room temperature:

$$Ms3 \leq 150 \text{emu/cc}$$

23. The magneto-optical recording medium as set forth in claim 1, wherein the Curie temperature $T3$ of said third magnetic layer satisfies the following relation:

$$80^\circ\text{C} \leq T3 \leq 220^\circ\text{C}$$

24. The magneto-optical recording medium as set forth in claim 1, wherein a coercive force of said second magnetic layer is smaller than a coercive force of said first magnetic layer.

25. The magneto-optical recording medium as set forth in claim 1, wherein a coercive force of said third magnetic layer is greater than a coercive force of said first magnetic layer.

26. The magneto-optical recording medium as set forth in claim 1, wherein said third magnetic layer cuts off an exchange-coupling force working between said first and second magnetic layers at least at a temperature equal to or higher than room temperature.

27. The magneto-optical recording medium as set forth in claim 1, wherein said third magnetic layer is a perpendicular magnetization film over a range from room temperature to its Curie temperature.

28. An information reproducing method for reproducing information stored in a magneto-optical recording medium including:

a substrate;

a first magnetic layer laminated on said substrate for reproducing the information;

a second magnetic layer laminated on said first magnetic layer for storing the information; and

a third magnetic layer disposed between said first and second magnetic layers and having a Curie temperature lower than Curie temperatures of said first and second magnetic layers,

wherein a direction of magnetization of a region of said first magnetic layer, said region being adjacent to a region of said third magnetic layer where a temperature is equal to or higher than the Curie temperature of said third magnetic layer, is oriented in a direction of magnetization around said region of said first magnetic layer,

said information reproducing method comprising the steps of:

irradiating a light spot;

increasing, in temperature, said third magnetic layer to near its Curie temperature in a high-temperature region within said light spot so as to orient the direction of magnetization, in said high-temperature region, of said first magnetic layer in the direction of magnetization of said first magnetic layer around said high-temperature region;

transferring the information stored in said second magnetic layer to said first magnetic layer at least at a medium-temperature region within said light spot; and

reproducing said information by detecting a magneto-optical effect of reflected light of said light spot.

29. The information reproducing method as set forth in claim 28, wherein, in said transferring step, the information stored in said second magnetic layer is transferred to said first magnetic layer via said third magnetic layer due to an exchange-coupling force.

30. The information reproducing method as set forth in claim 28, wherein, in said transferring step, the information stored in said second magnetic layer is transferred to said first magnetic layer due to a magneto-static coupling force.

31. The information reproducing method as set forth in claim 28, further comprising the step of applying an external magnetic field for initializing magnetization in a low-temperature region within said light spot to align in one direction.

5 32. A magneto-optical recording medium comprising a stack of laminated magnetic layers comprising a reproduction layer, a storage layer, and at least one intermediate layer between the reproduction layer and the storage layer, wherein the intermediate layer has a Curie temperature lower than those of the reproduction and storage layers, and is effective to cut off the exchange coupling between the reproduction and storage layer above a predetermined temperature.

10 33. A magneto-optical reproducing method using a recording medium according to Claim 32.

34. A magneto-optical recording method using a recording medium according to Claim 32.

15

20

25

30

35

40

45

50

55

FIG. 1A
PRIOR ART

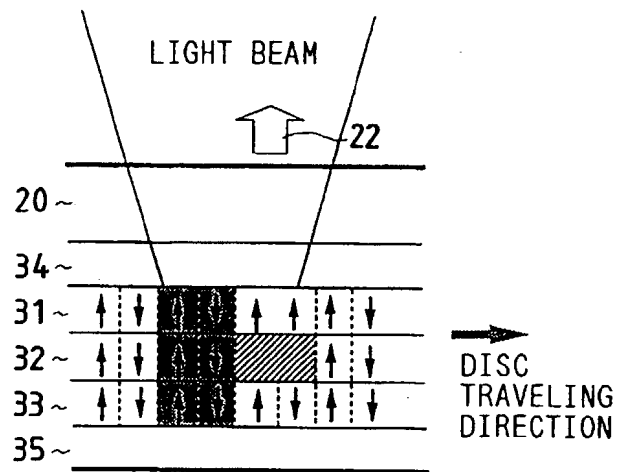


FIG. 1B
PRIOR ART

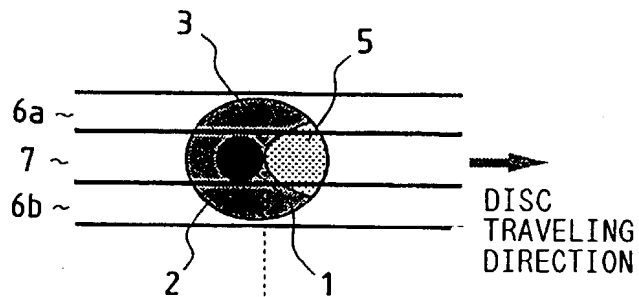


FIG. 1C
PRIOR ART

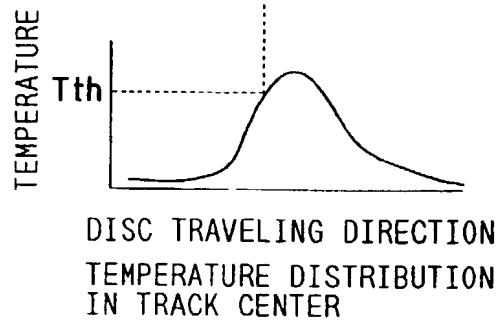


FIG. 2A
PRIOR ART

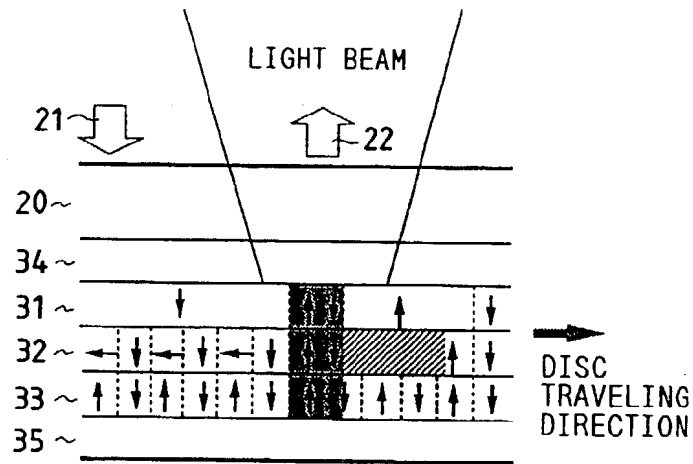


FIG. 2B
PRIOR ART

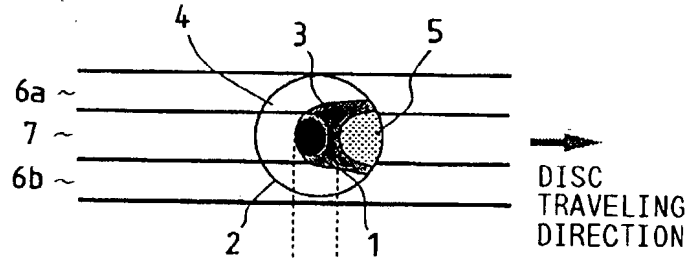


FIG. 2C
PRIOR ART

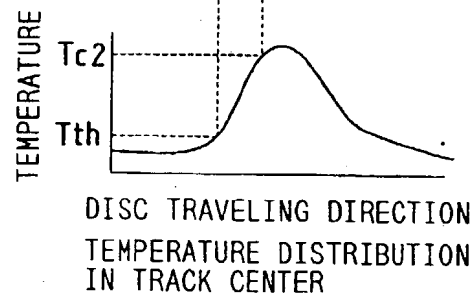


FIG. 3A
PRIOR ART

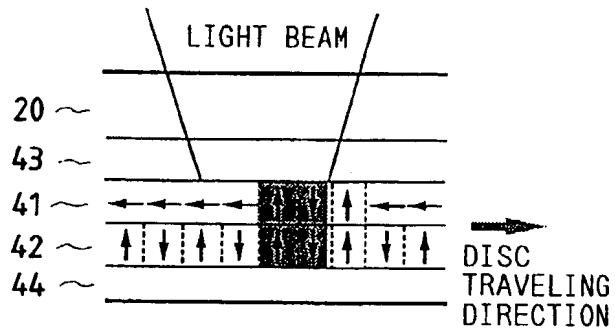


FIG. 3B
PRIOR ART

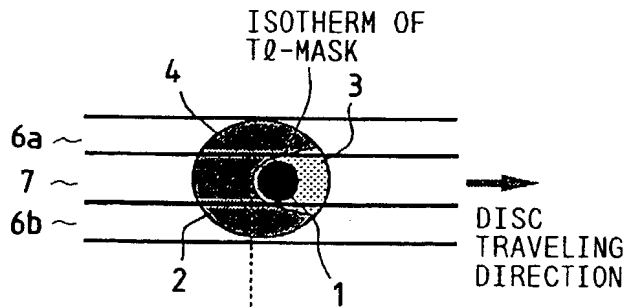


FIG. 3C
PRIOR ART

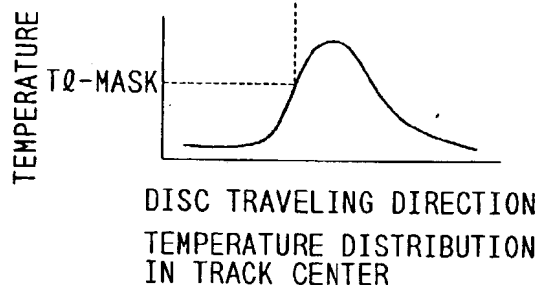


FIG. 4

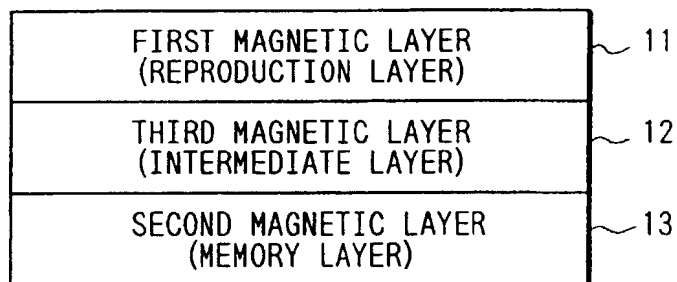


FIG. 5A

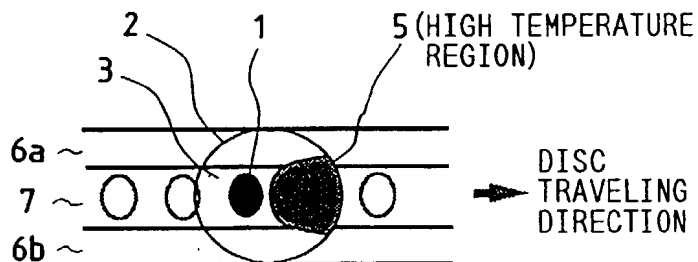


FIG. 5B

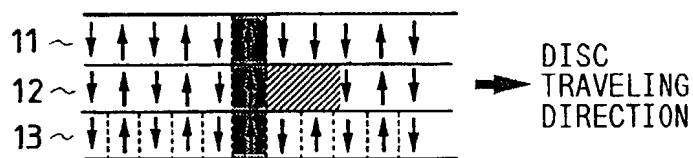


FIG. 5C

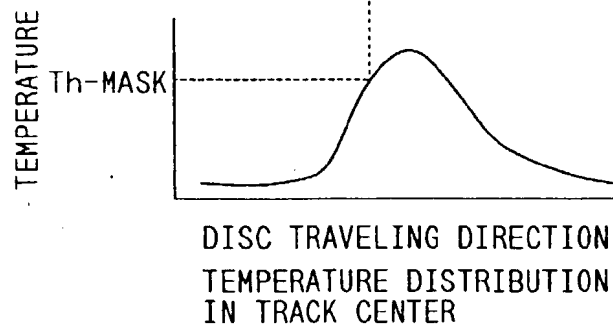


FIG. 6A

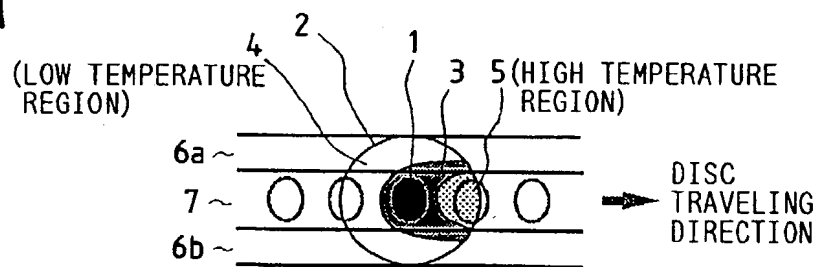


FIG. 6B

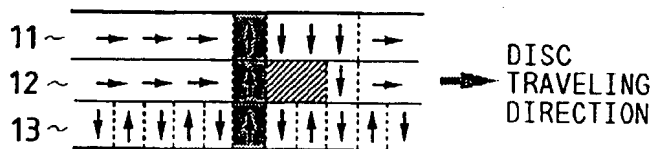


FIG. 6C

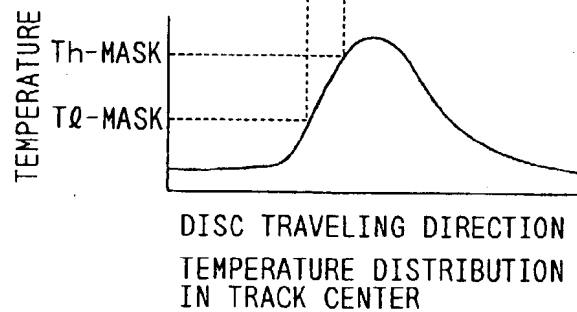


FIG. 7A

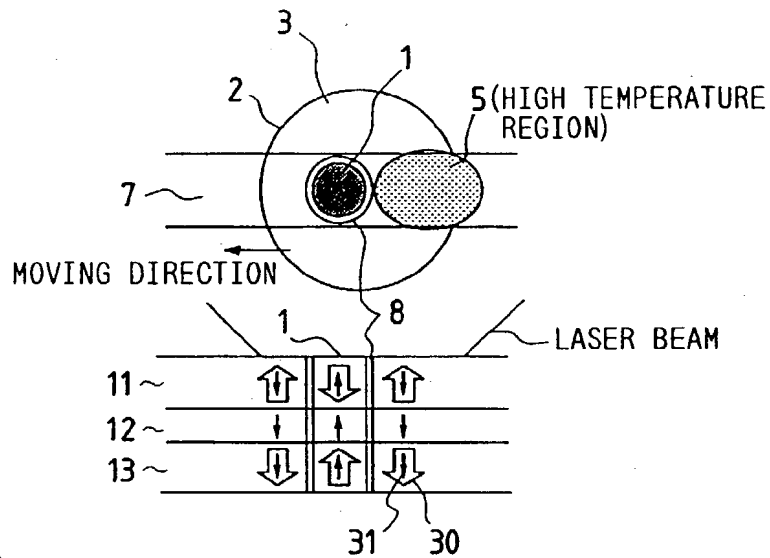


FIG. 7B

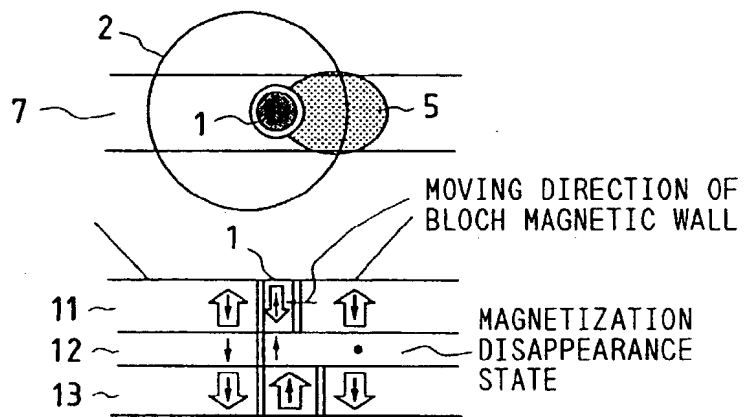


FIG. 7C

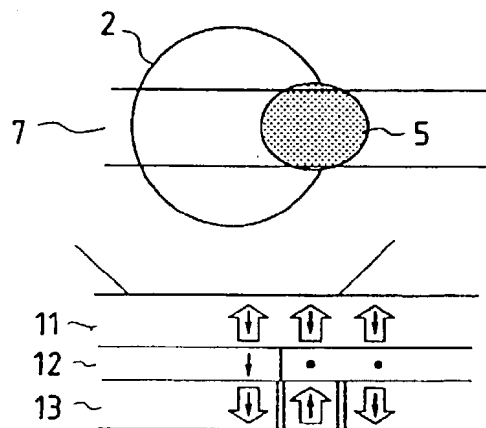


FIG. 8

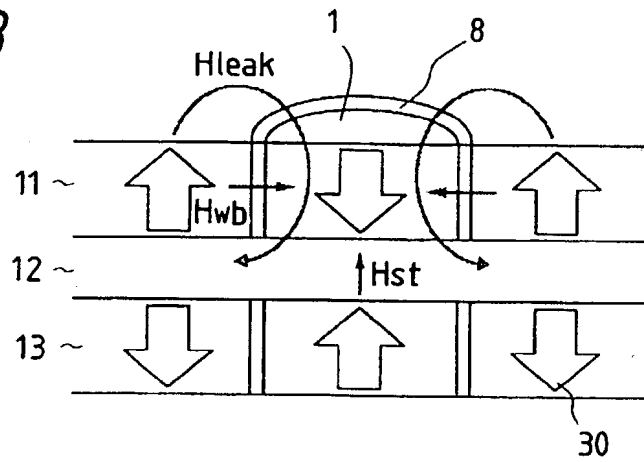


FIG. 9A

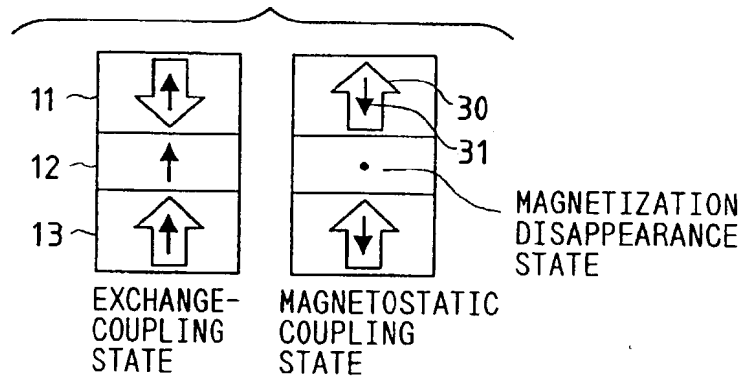


FIG. 9B

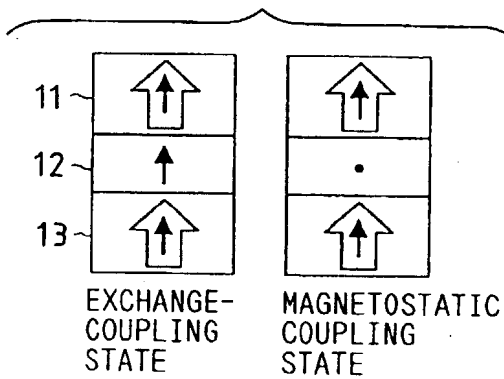


FIG. 10A

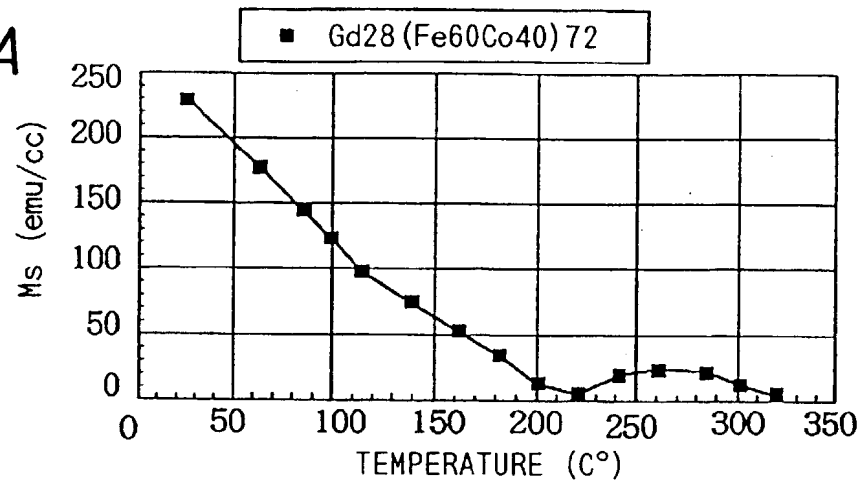


FIG. 10B

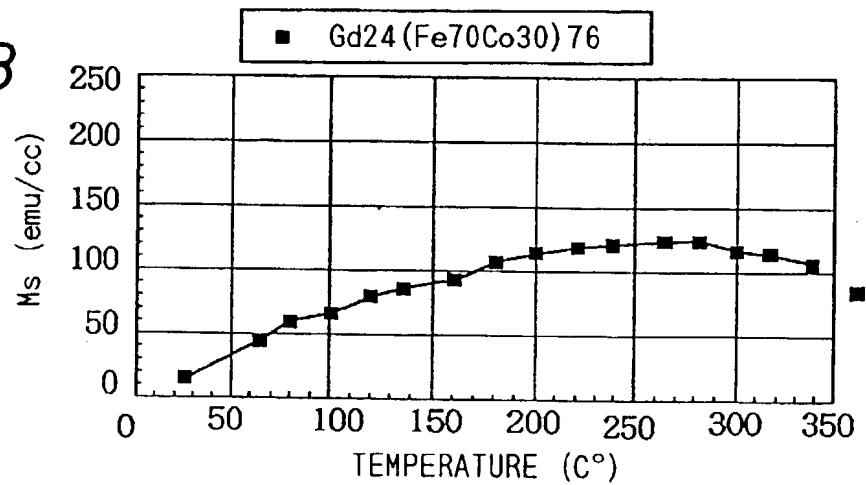


FIG. 10C

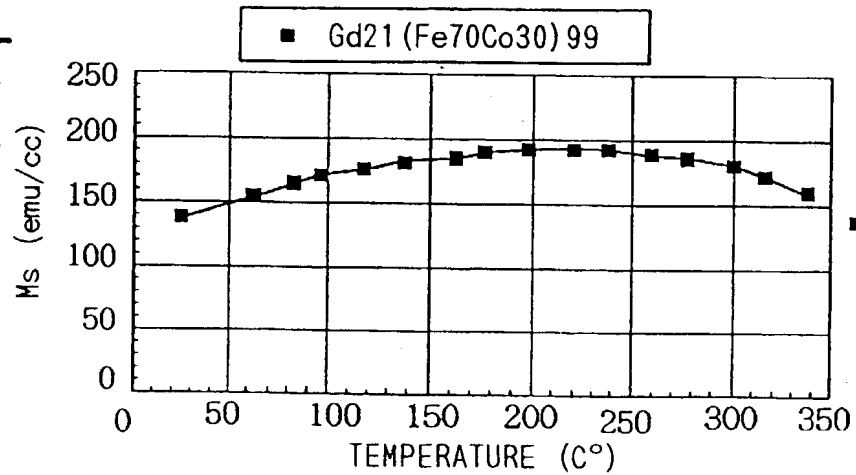


FIG. 11

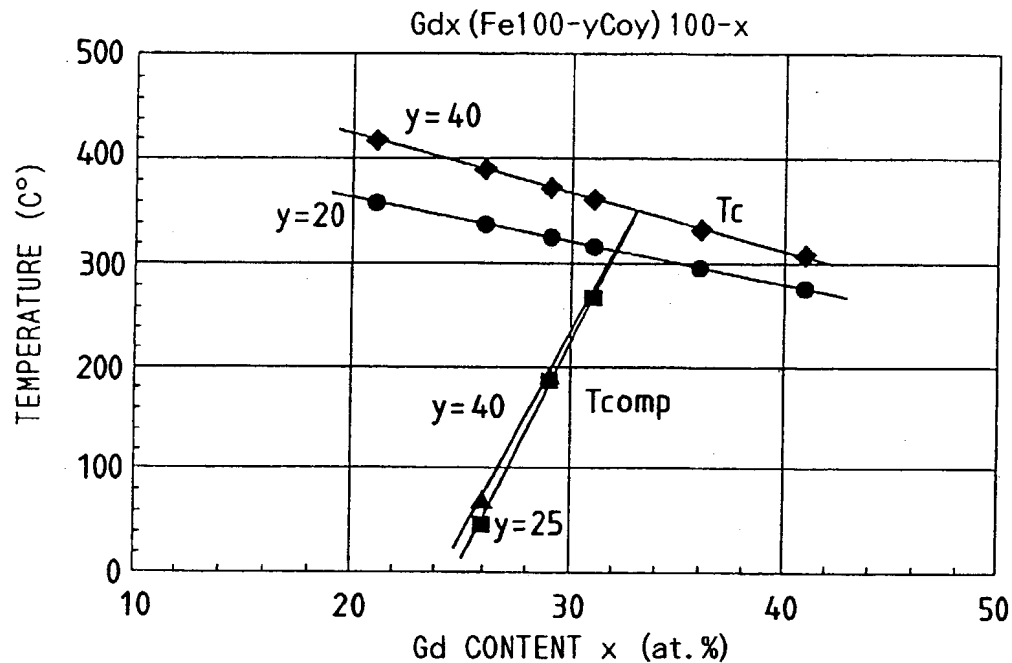


FIG. 12

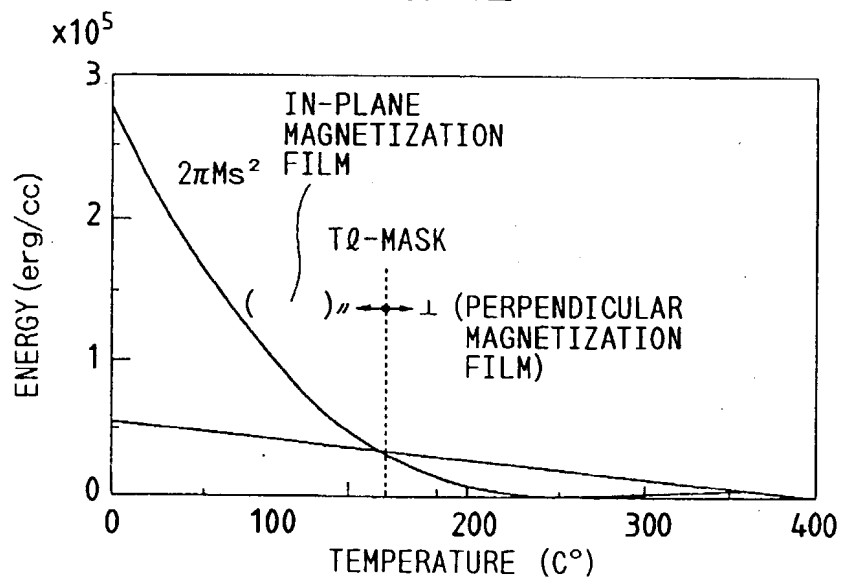


FIG. 13A

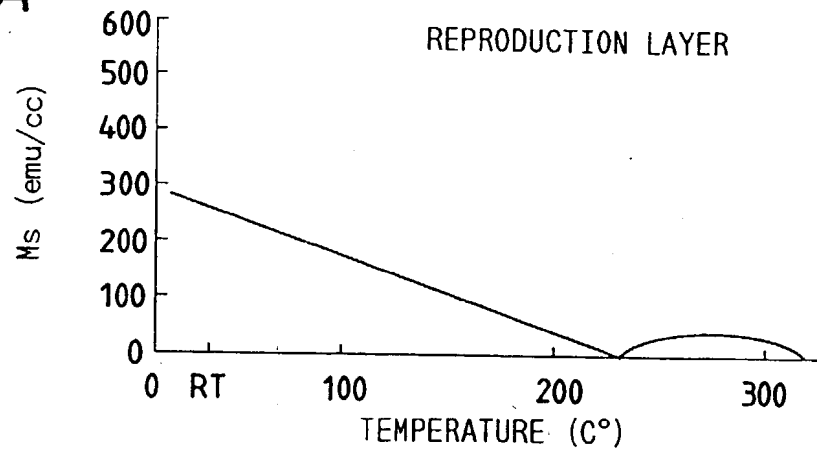


FIG. 13B

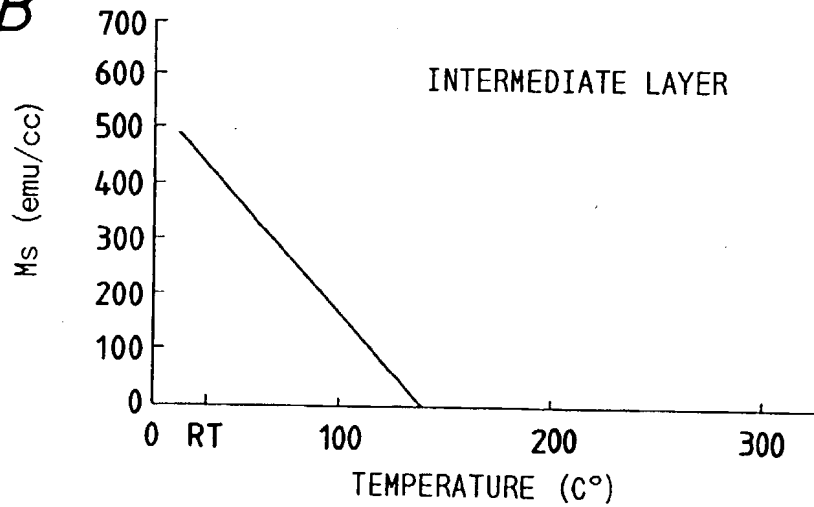


FIG. 13C

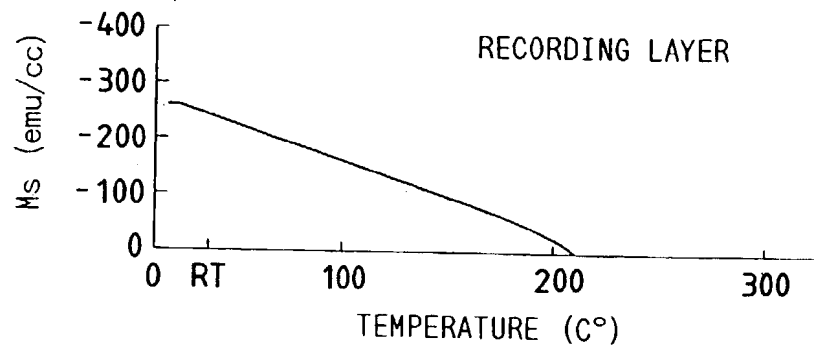


FIG. 14

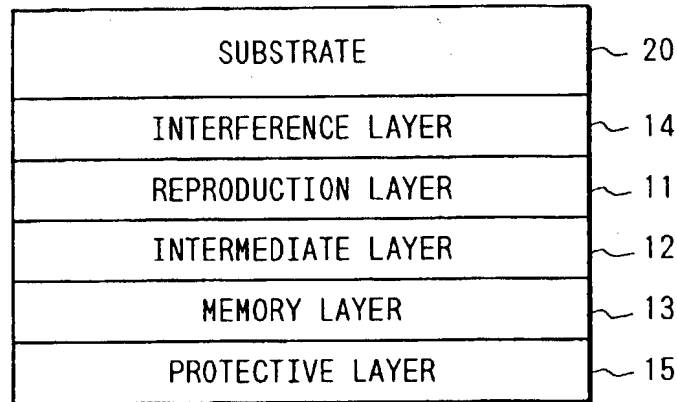


FIG. 15A

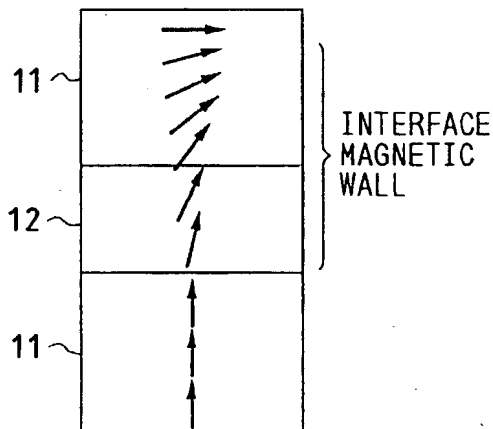


FIG. 15B

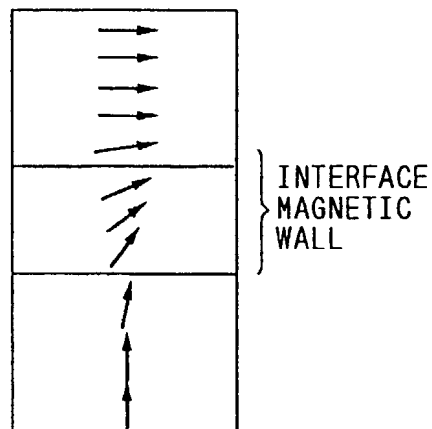


FIG. 16

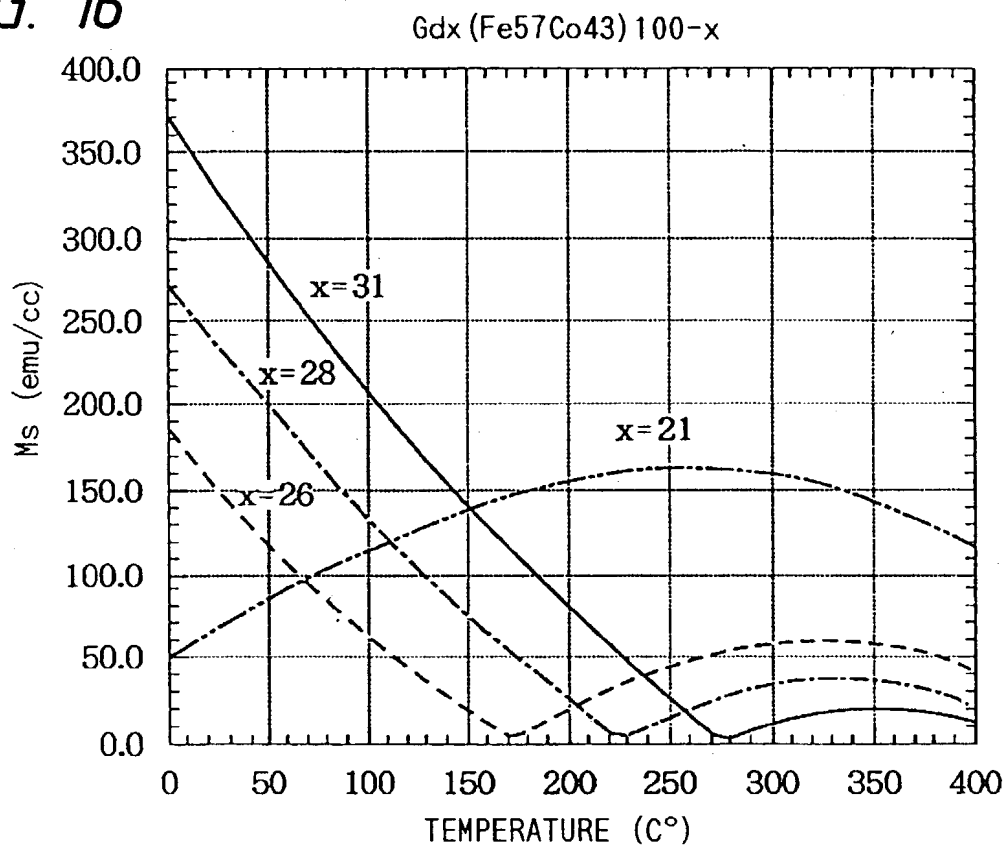


FIG. 17

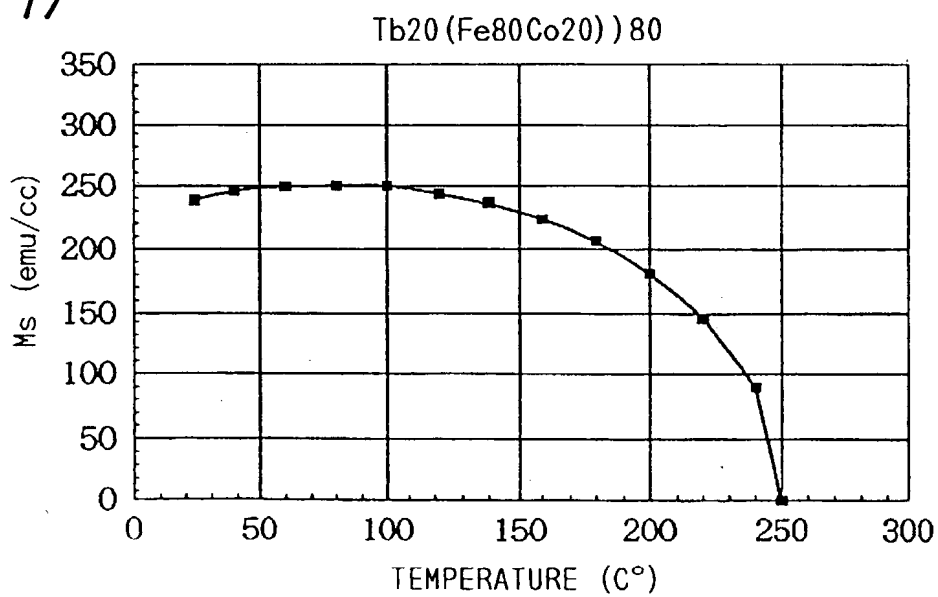


FIG. 18

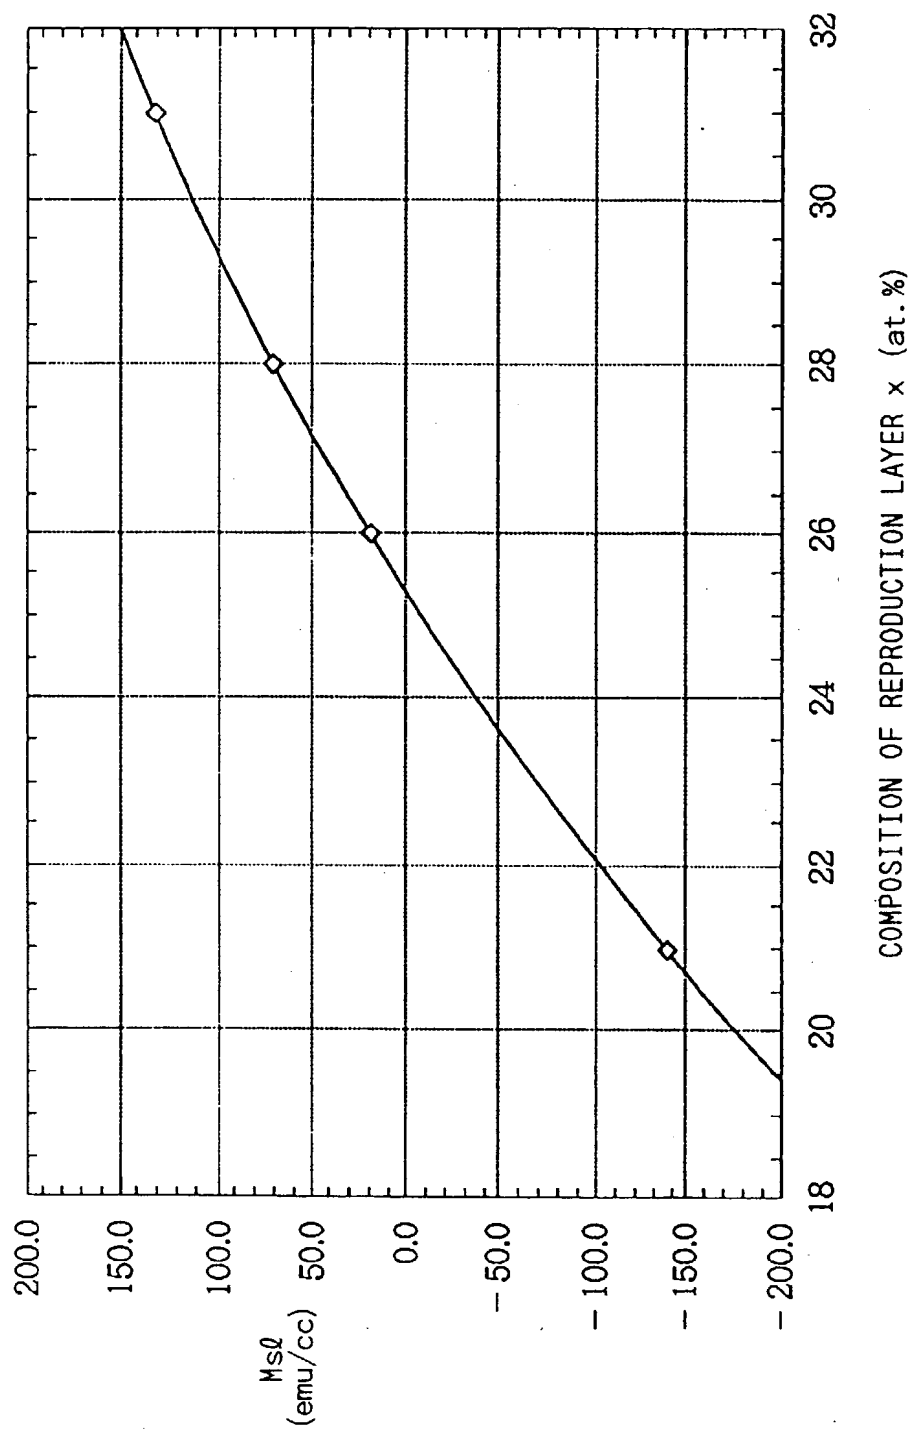


FIG. 19

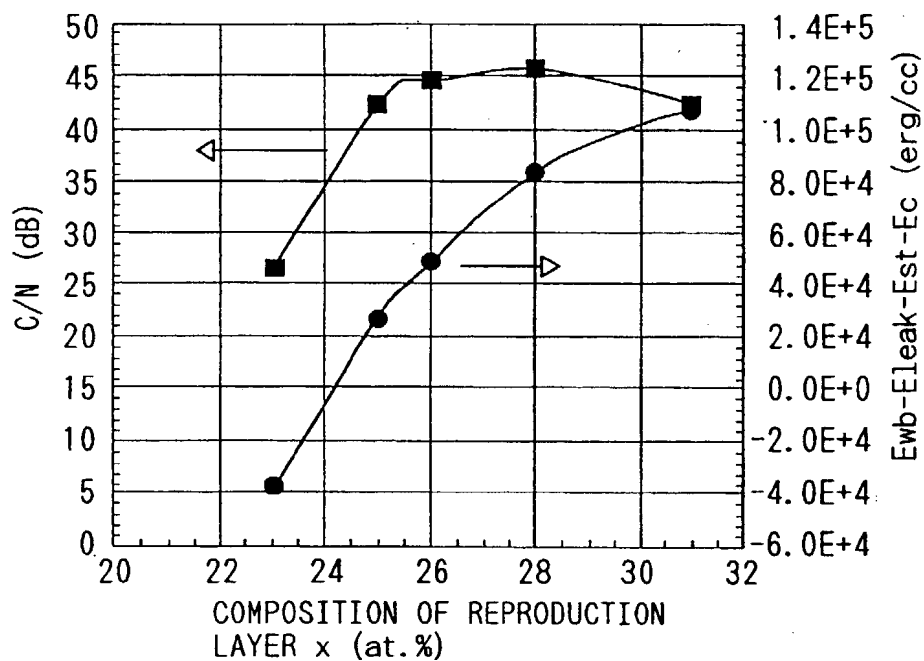


FIG. 20

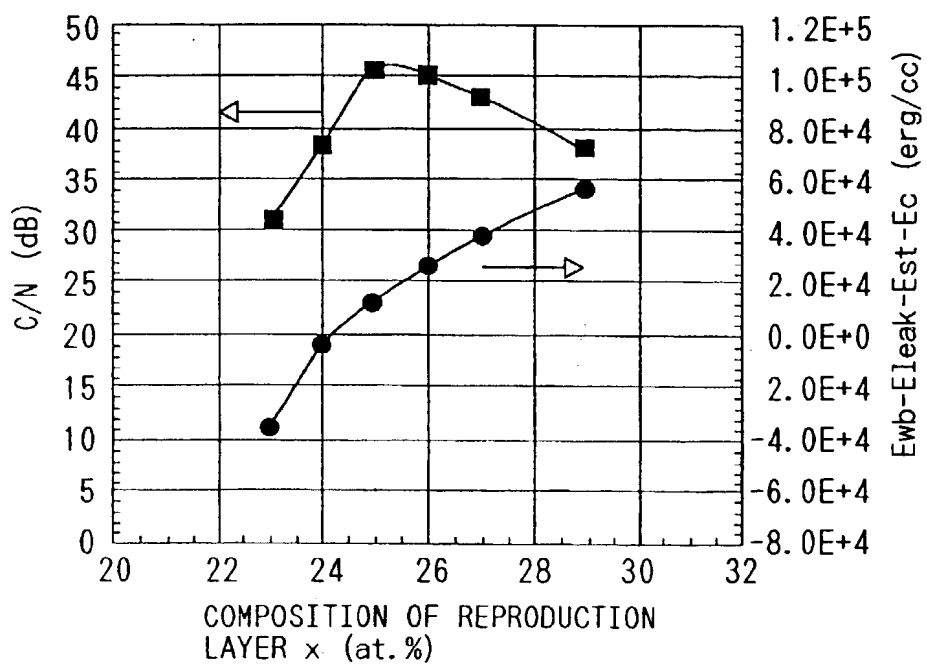


FIG. 21

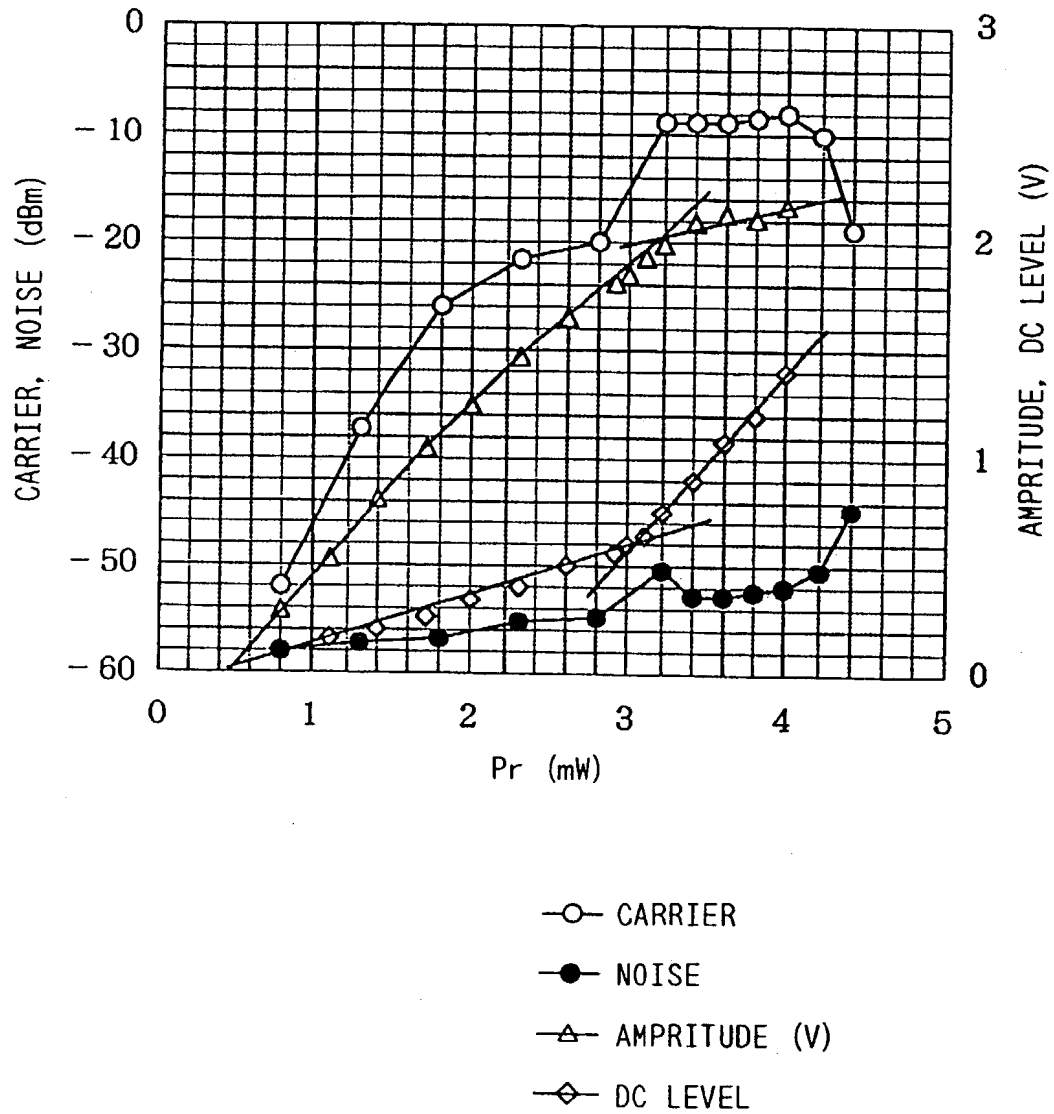


FIG. 22

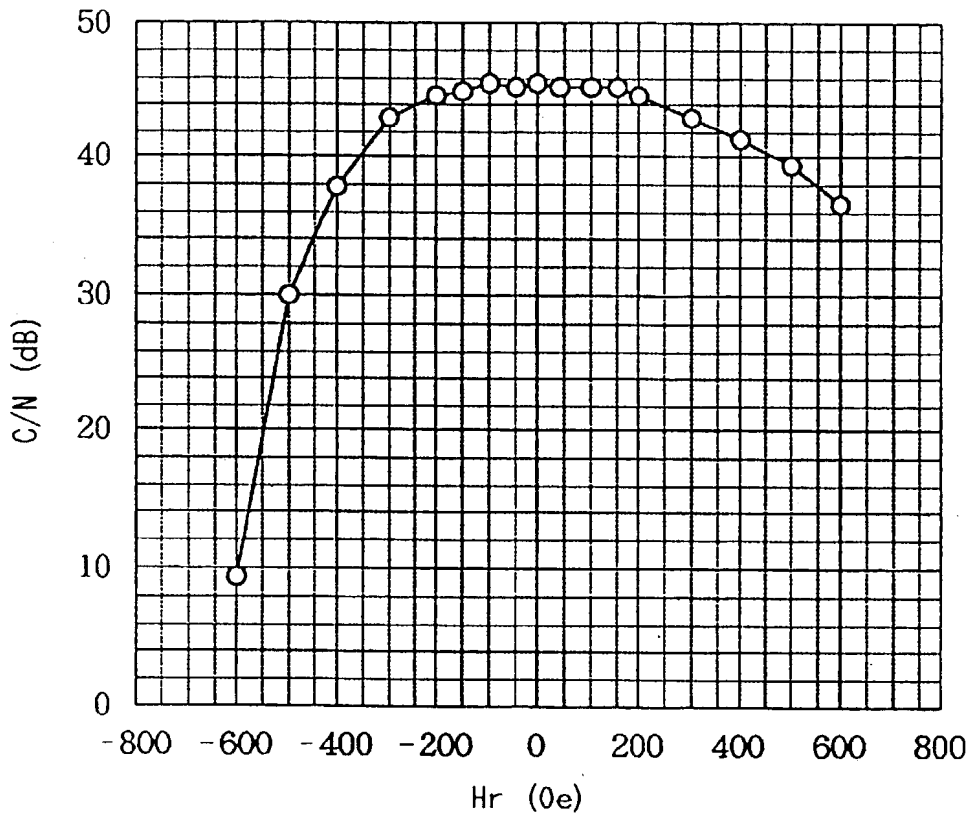


FIG. 24



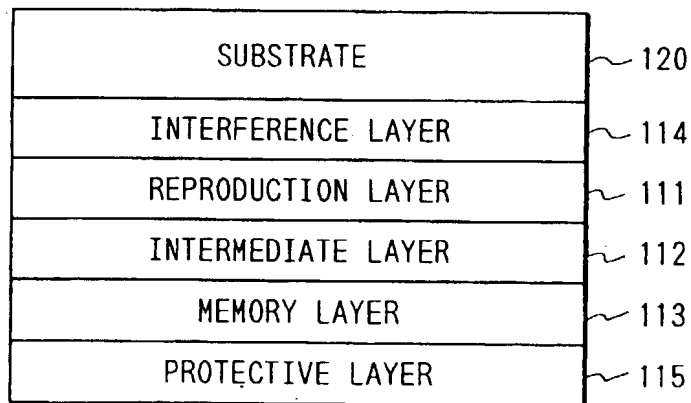


FIG. 23

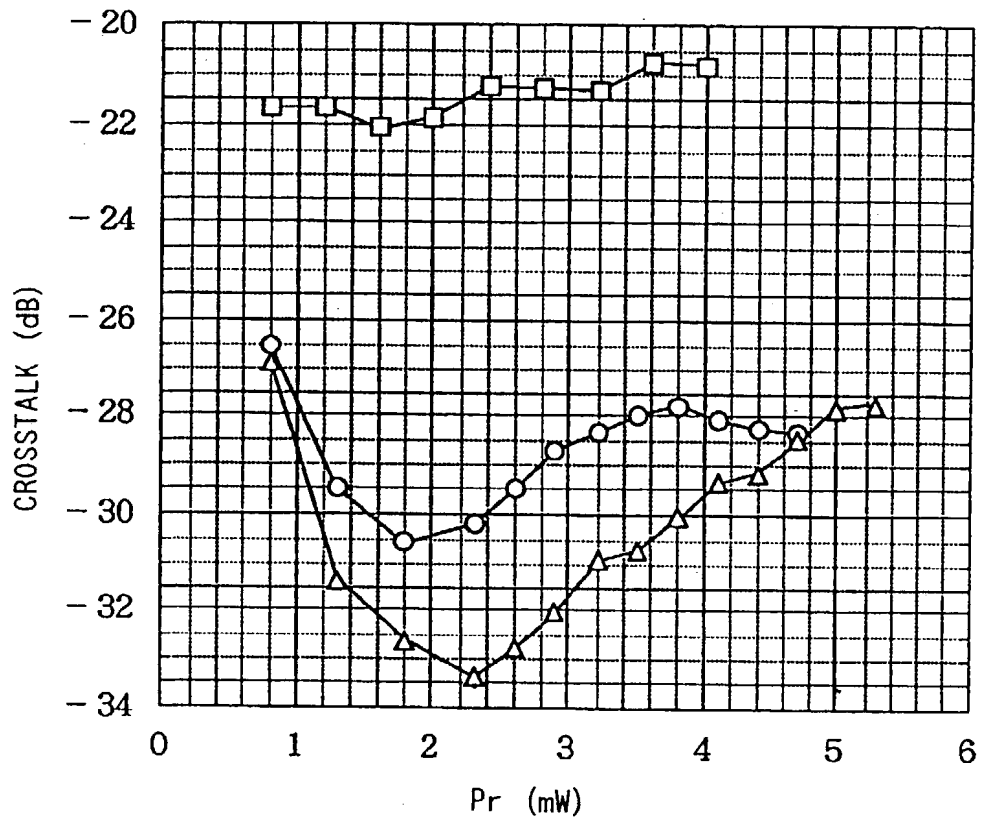

- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- △— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL SINGLE LAYER DISC



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 686 970 A3**

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
24.07.1996 Bulletin 1996/30

(51) Int Cl.⁶ **G11B 11/10**

(43) Date of publication A2:
13.12.1995 Bulletin 1995/50

(21) Application number: **95303932.8**

(22) Date of filing: **08.06.1995**

(84) Designated Contracting States:
DE FR GB IT NL

(30) Priority: 10.06.1994 JP 128778/94
10.06.1994 JP 128779/94
10.06.1994 JP 128780/94
26.08.1994 JP 201979/94
26.08.1994 JP 201980/94
30.09.1994 JP 236209/94
24.10.1994 JP 258002/94

(71) Applicant: **CANON KABUSHIKI KAISHA**
Tokyo (JP)

(72) Inventors:

- Nishimura, Naoki, c/o Canon K.K.
Ohta-ku, Tokyo (JP)
- Hiroki, Tomoyuki, c/o Canon K.K.
Ohta-ku, Tokyo (JP)
- Okada, Takeshi, c/o Canon K.K.
Ohta-ku, Tokyo (JP)

(74) Representative:


Beresford, Keith Denis Lewis et al
BERESFORD & Co.
2-5 Warwick Court
High Holborn
London WC1R 5DJ (GB)

(54) Magneto-optical recording medium and reproducing method using the medium

(57) In a magneto-optical recording medium, a first magnetic layer (11) for participating in reproduction of information is laminated on a substrate. A second magnetic layer (13) for storing information is laminated on the first magnetic layer. A third magnetic layer (12) having a Curie temperature lower than those of the first and

second magnetic layers is disposed between the first magnetic layer and the second magnetic layer. A magnetization of a region of the first magnetic layer adjacent to a region of the third magnetic layer the temperature of which is above the Curie temperature of the third magnetic layer is aligned with the direction of magnetization of a region around the region of the first magnetic layer.

FIG. 5A

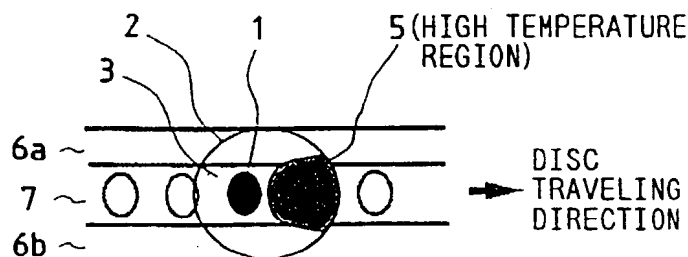

EP 0 686 970 A3

FIG. 5B


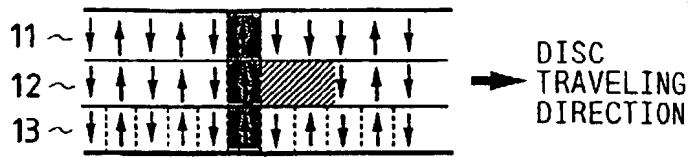


FIG. 5C



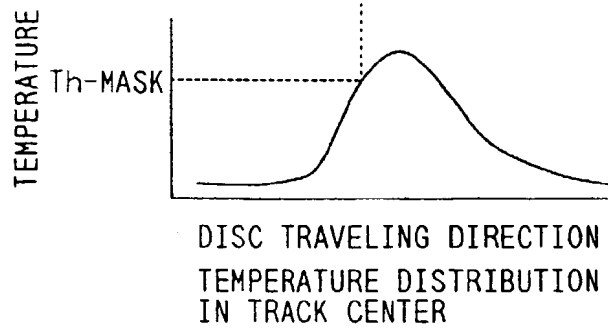

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 30 3932

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	PROCEEDINGS OF THE IEEE, vol. 32, no. 4, April 1994, NY, US, pages 544-552, XP000451415 MASAHICO KANEKO ET AL.: "IRISTER- Magneto-optical disk for magnetically induced superresolution"	32-34	G11B11/10
A	* the whole document *	1,28	
X	JAPANESE JOURNAL OF APPLIED PHYSICS PART 1, vol. 31, no. 2b, February 1992, TOKYO, JP , pages 568-575, XP000323484 MASAHICO KANEKO: "Multilayered Magneto-optical Disks for magnetically induced superresolution"	32-34	
A	* the whole document *	1,28	
A	EP-A-0 583 720 (SONY CORP.) * claims 1-9; figures 1-3 *	1	
D,A	PATENT ABSTRACTS OF JAPAN vol. 17, no. 36 (P-1474), 22 January 1993 & JP-A-04 255946 (SONY CORP.), 10 September 1992, * abstract *	1,28,32	TECHNICAL FIELDS SEARCHED (Int.Cl.6) G11B
A	EP-A-0 498 461 (SONY CORP.) * claims 1-21; figures 1-29 *	1,28	
A	EP-A-0 586 175 (CANON KK) * claims 1-32; figures 1-33 *	1,28	
D	& JP-A-06 124 500		
A	EP-A-0 536 780 (SONY CORP.) * claims 1,2; figures 3-6 *	28	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 24 April 1996	Examiner Bernas, Y
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1501 03/92; Po/COL

FIG. 25A MASK PORTION
(ROOM TEMPERATURE)

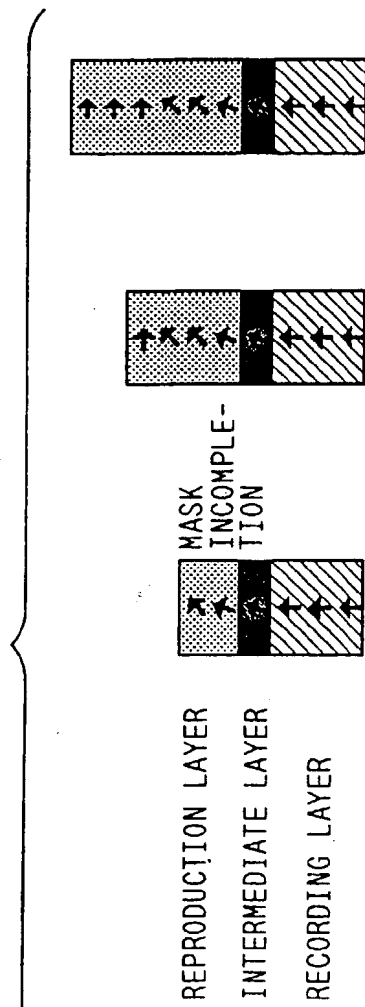


FIG. 25B APERTURE PORTION
(T_{th})

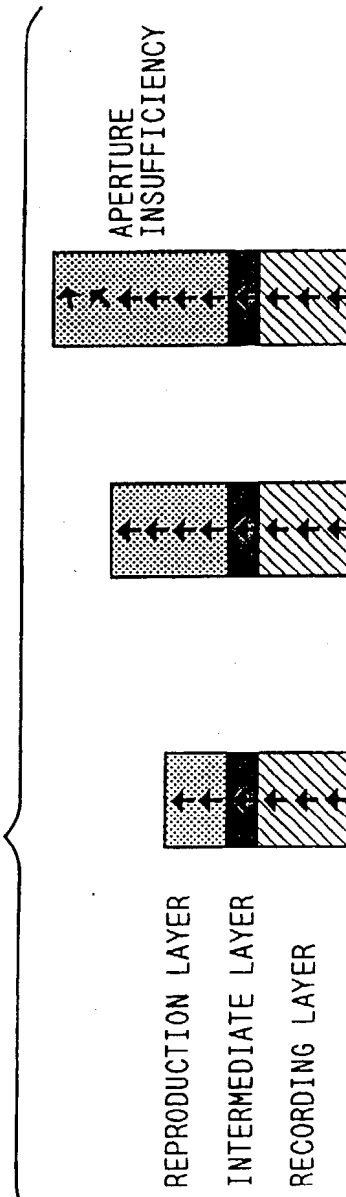


FIG. 26A MASK PORTION
(ROOM TEMPERATURE)

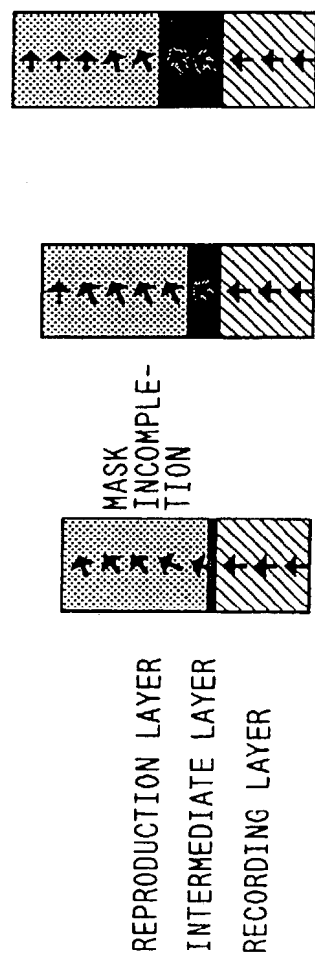


FIG. 26B APERTURE PORTION
(T_{th})



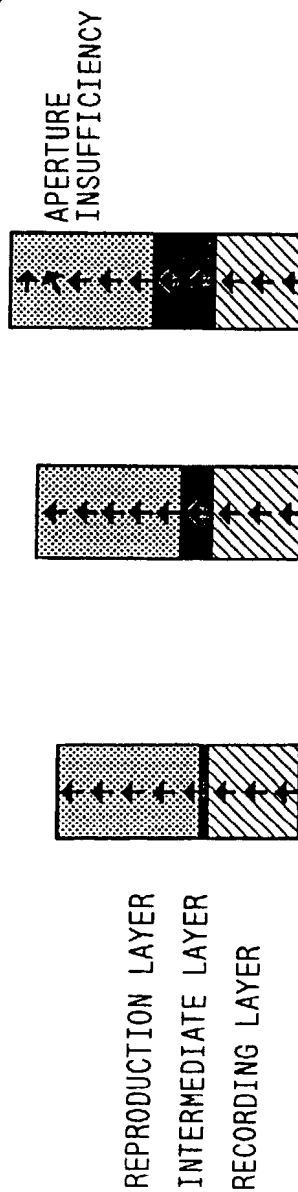


FIG. 27

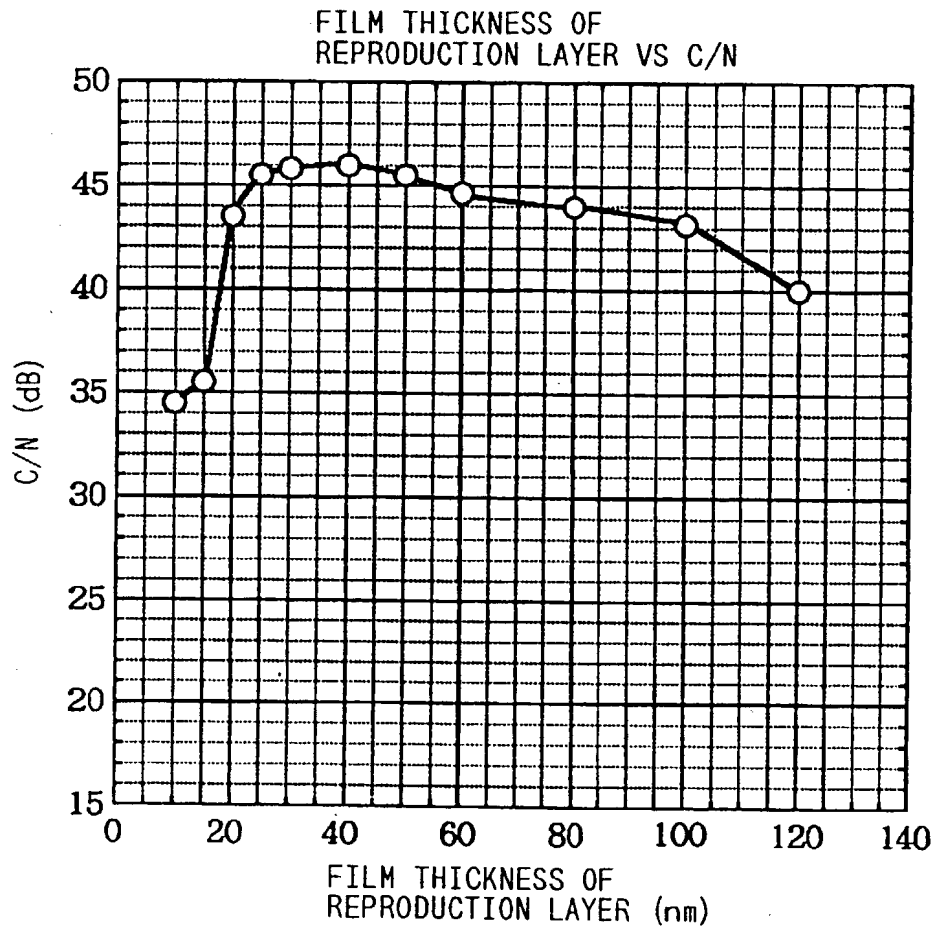

FILM THICKNESS OF
RECORDING LAYER = 30nm
FILM THICKNESS OF
INTERMEDIATE LAYER = 10nm
MARK LENGTH = 0.4 μ m
2400rpm, R36
LINEAR VELOCITY = 9m/s

FIG. 28

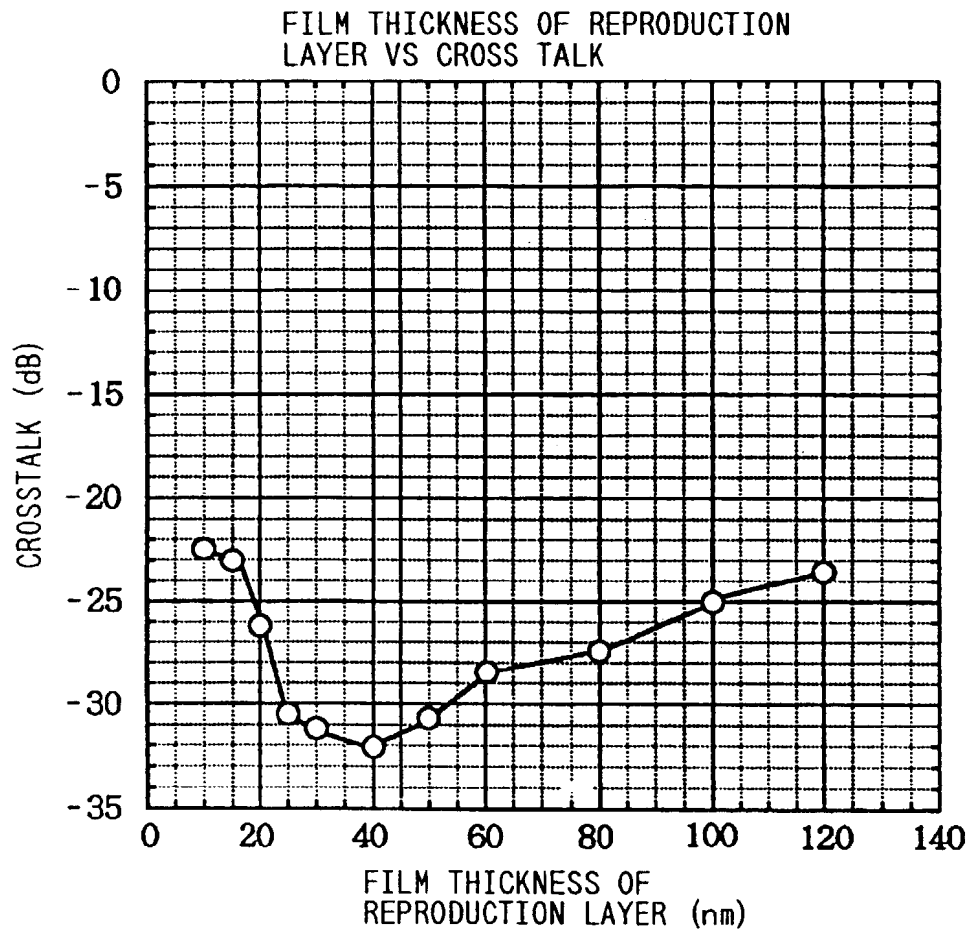

FILM THICKNESS OF
RECORDING LAYER = 30nm


FILM THICKNESS OF
INTERMEDIATE LAYER = 10nm

MARK LENGTH = 0.78 μ m

2400rpm, R36

LINEAR VELOCITY = 9m/s

FIG. 29

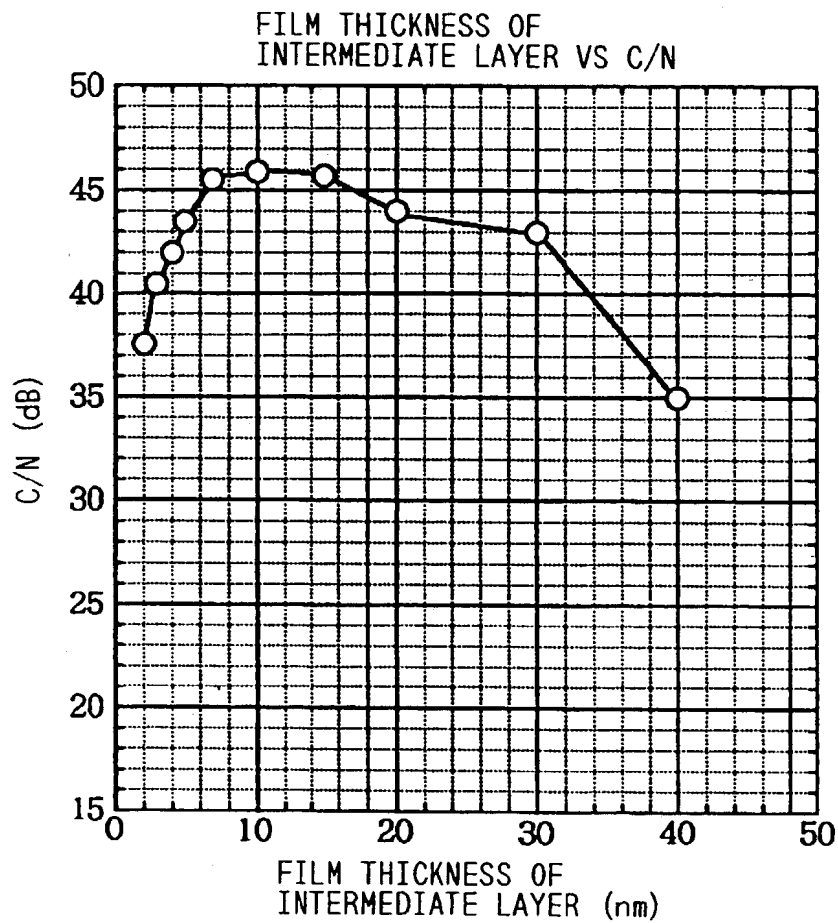

FILM THICKNESS OF
REPRODUCTION LAYER = 40nm


FILM THICKNESS OF
RECORDING LAYER = 30nm

MARK LENGTH = 0.4 μ m

2400rpm, R36

LINEAR VELOCITY = 9m/s

FIG. 30

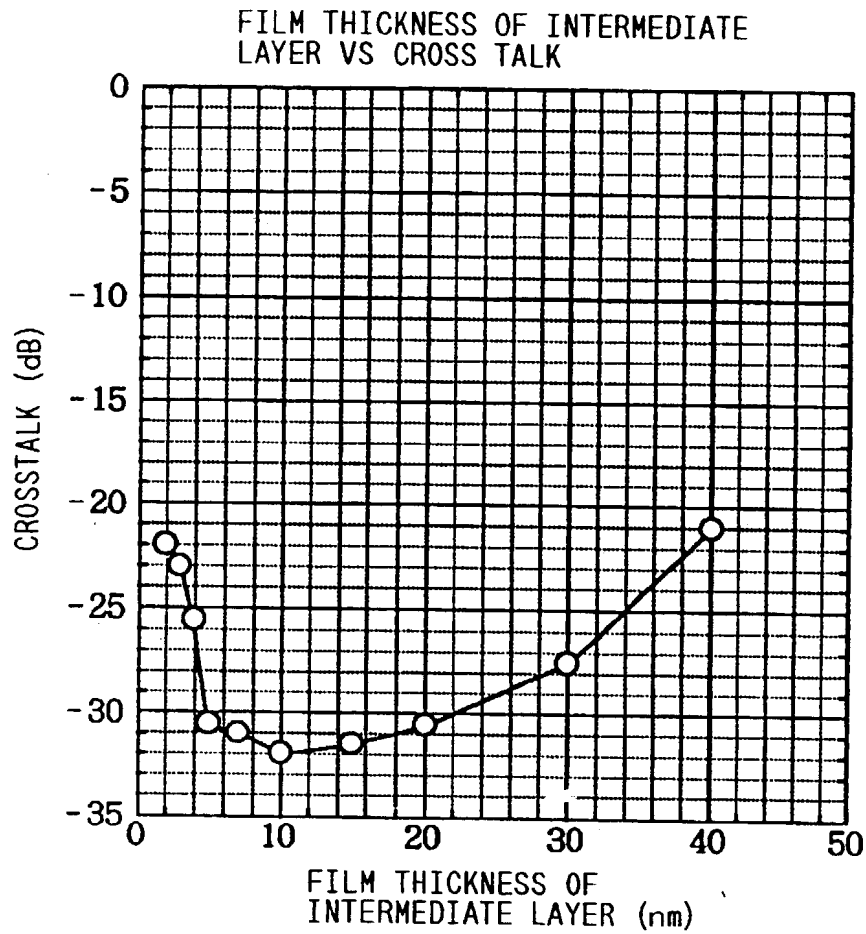

FILM THICKNESS OF
REPRODUCTION LAYER = 40nm

FILM THICKNESS OF
RECORDING LAYER = 30nm

MARK LENGTH = 0.78 μ m

2400rpm, R36

LINEAR VELOCITY = 9m/s

FIG. 31

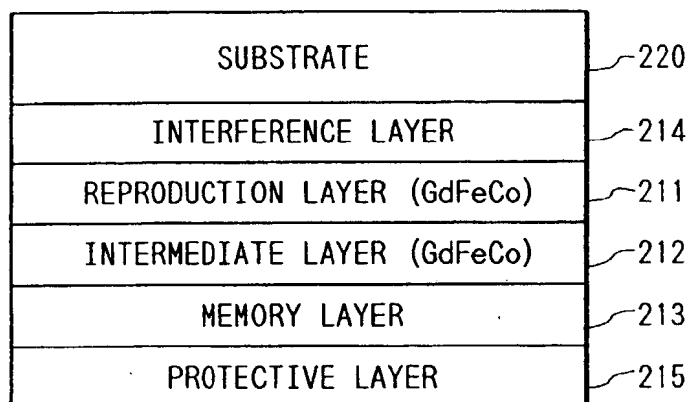


FIG. 40


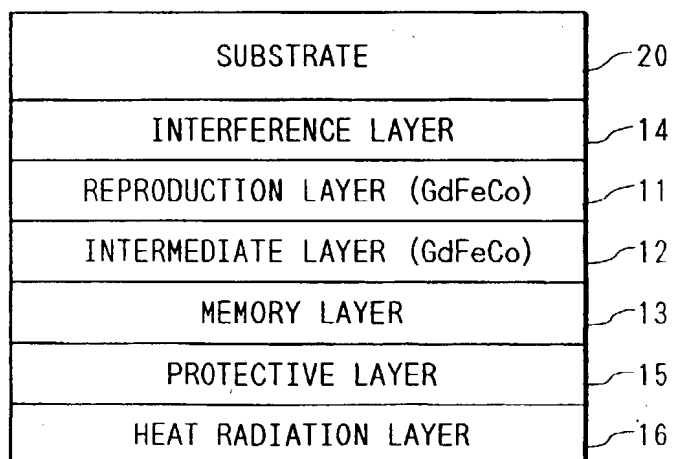


FIG. 32

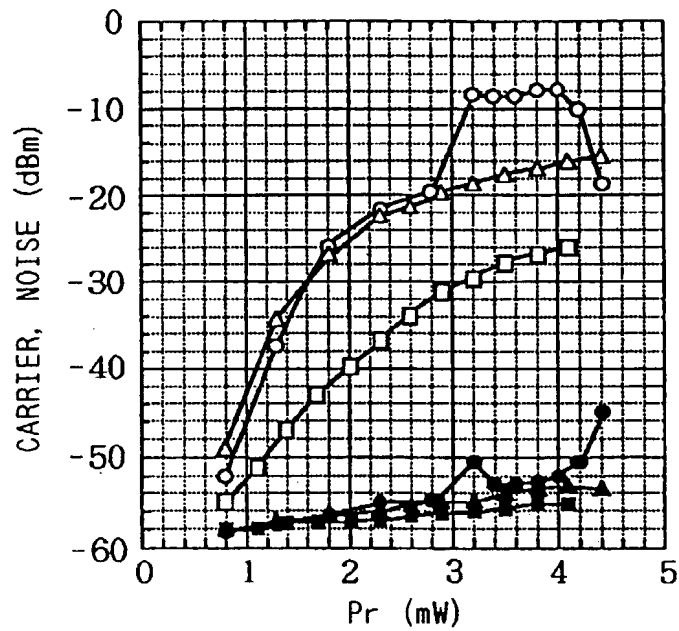


CARRIER

- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- △— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL DISC
OF SINGLE LAYER FILM

NOISE

- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- ▲— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL DISC
OF SINGLE LAYER FILM

FIG. 33

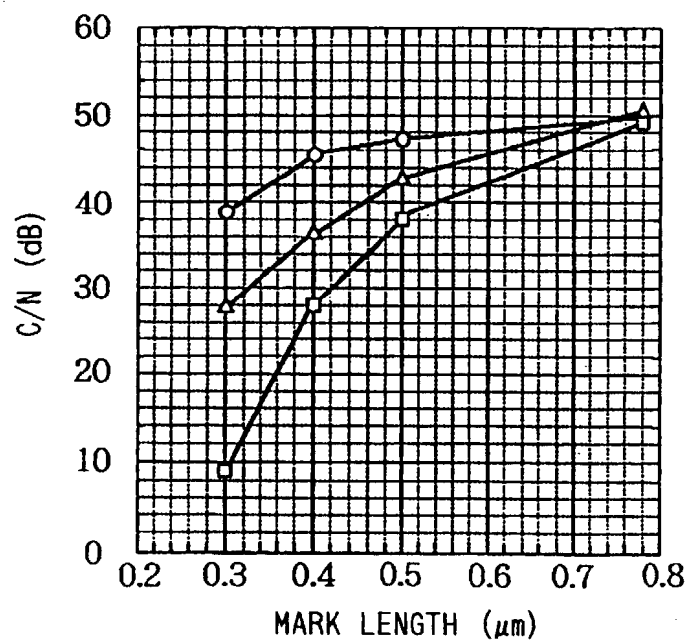


- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- △— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL DISC
OF SINGLE LAYER FILM

LINEAR VELOCITY = 9.05m/s


REPRODUCING POWER = 3.5mW

FIG. 34

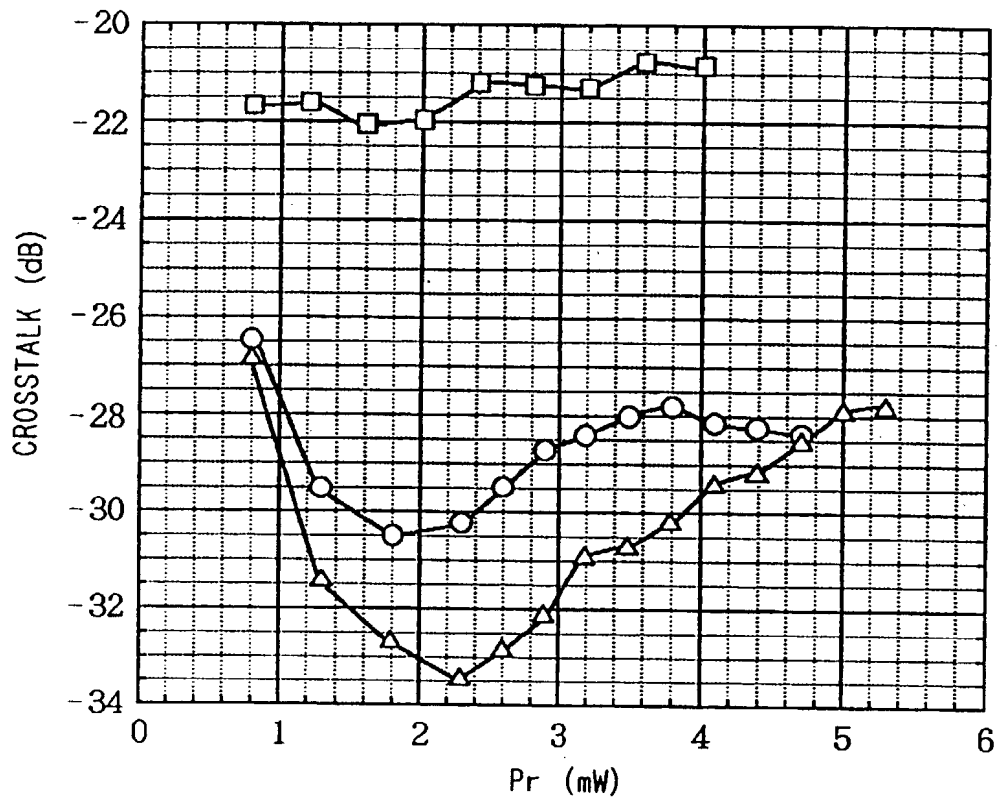

- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- △— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL DISC
OF SINGLE LAYER FILM


FIG. 35

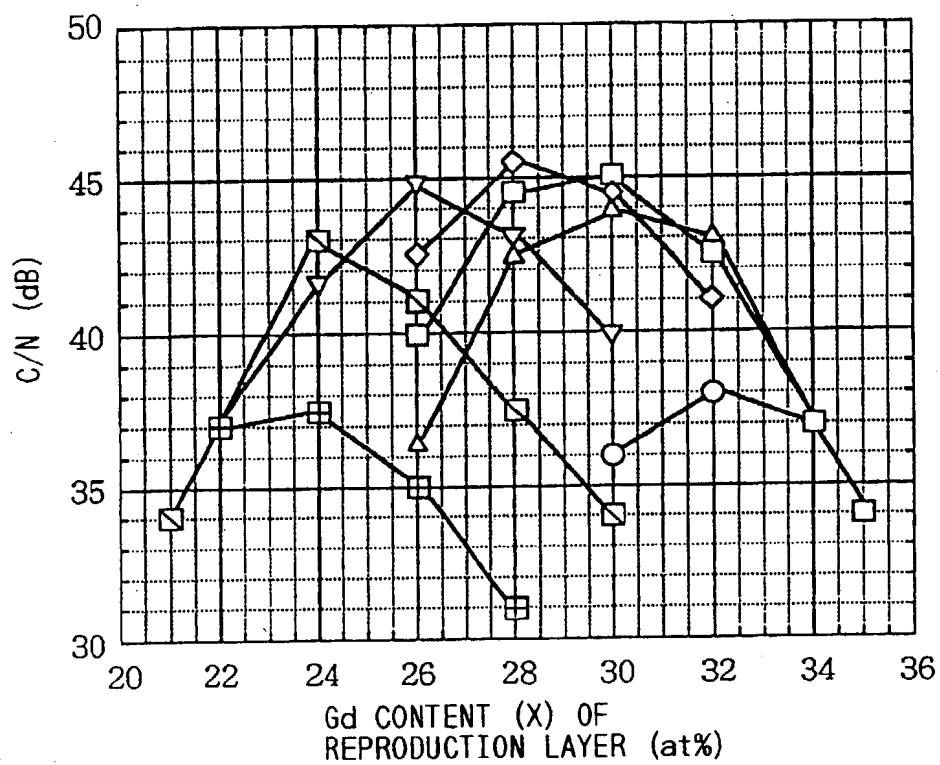

Gd CONTENT (P)
OF INTERMEDIATE
LAYER (at%)

- 15
- △— 25
- 30
- ◇— 35
- ▽— 45
- ◻— 50
- ▣— 55

FIG. 36

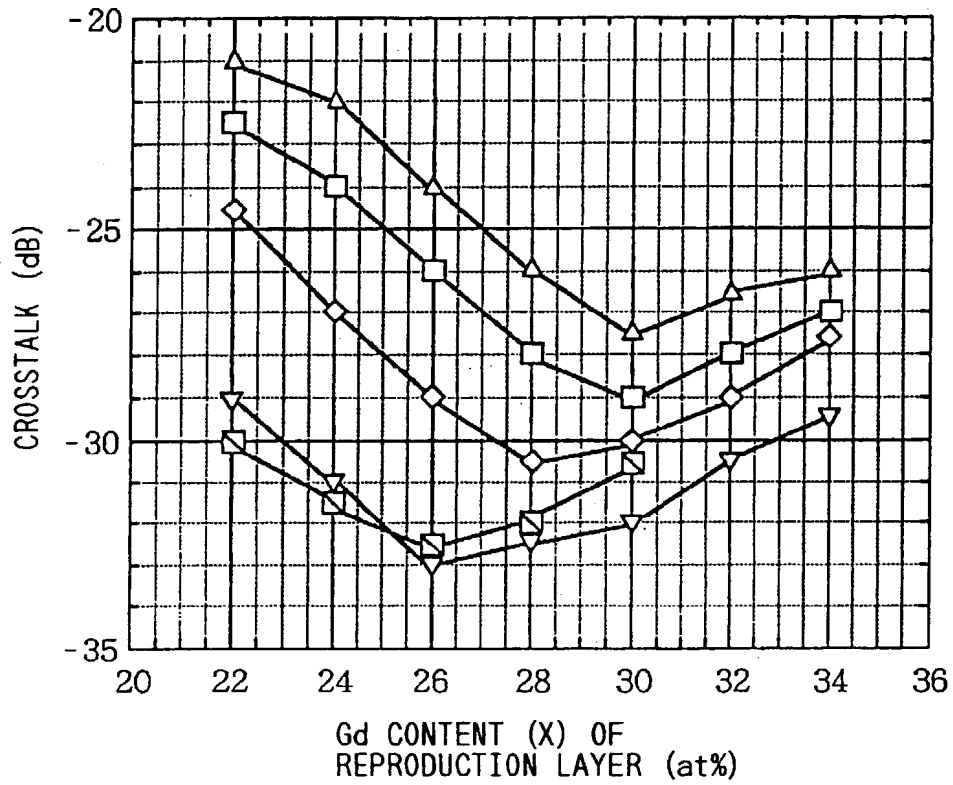

Gd CONTENT (P)
OF INTERMEDIATE
LAYER (at%)

- △— 25
- 30
- ◇— 35
- ▽— 45
- ◻— 50

FIG. 37

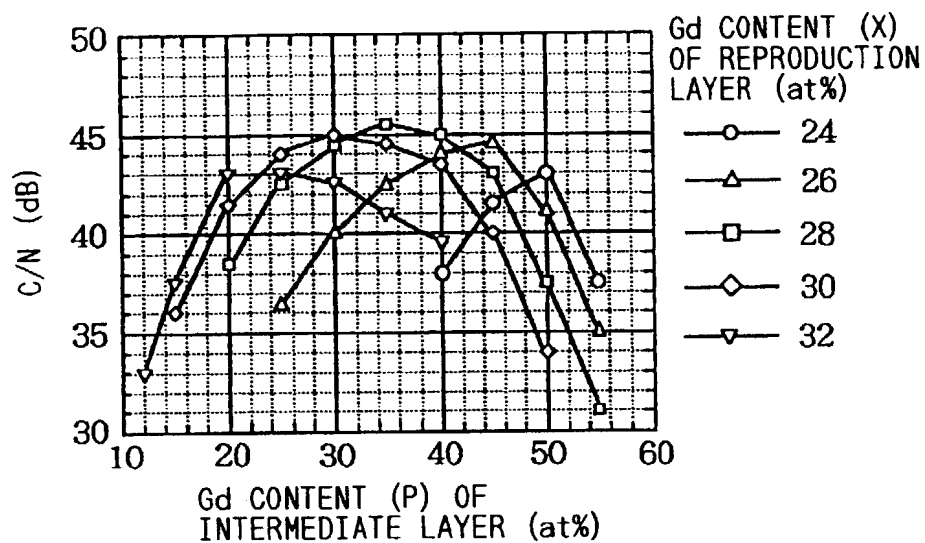


FIG. 38

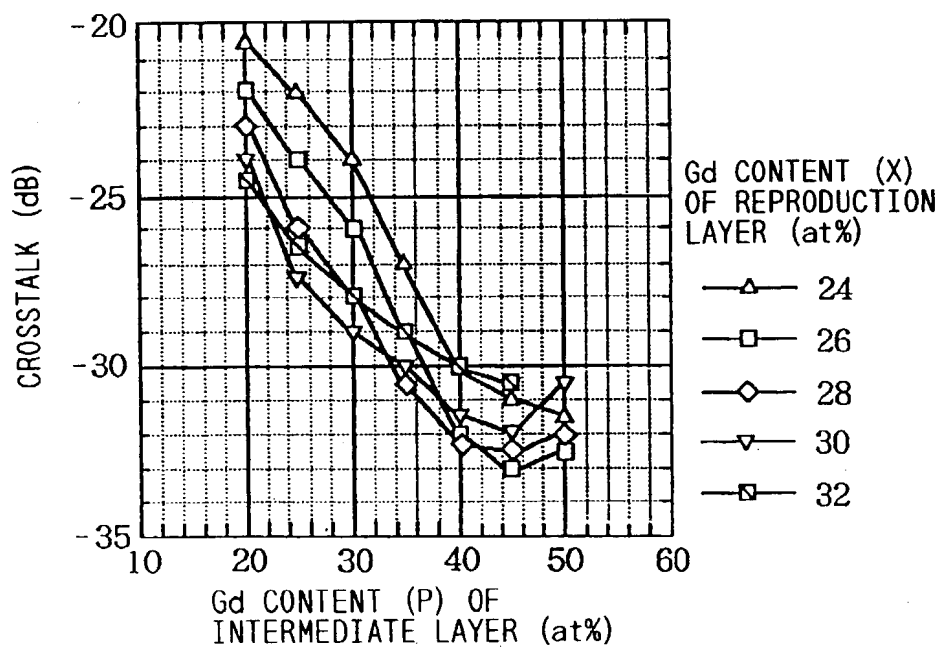


FIG. 39

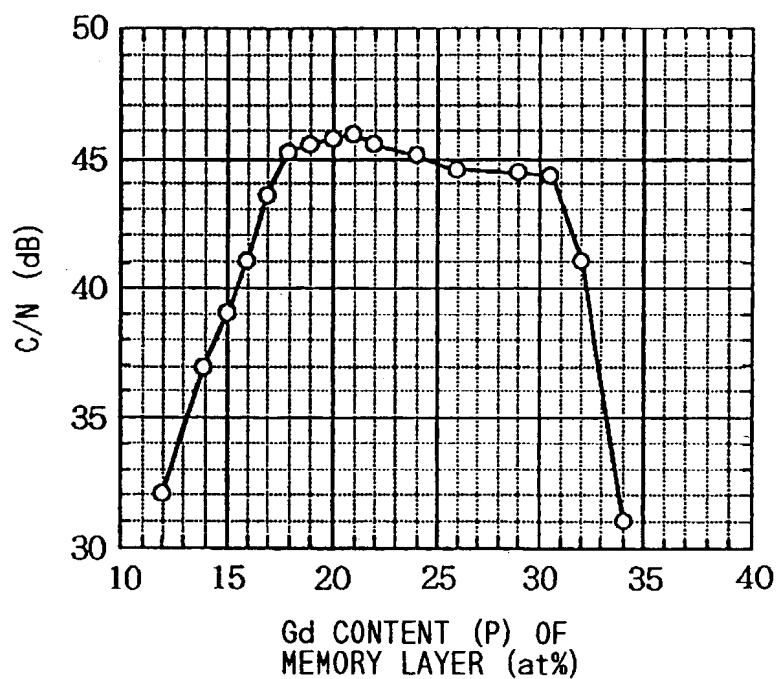


FIG. 42

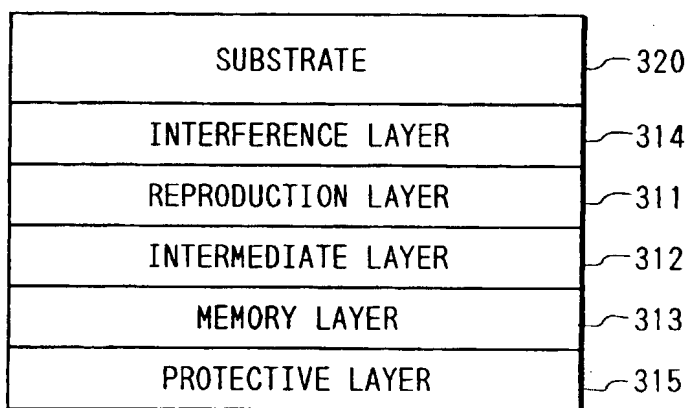
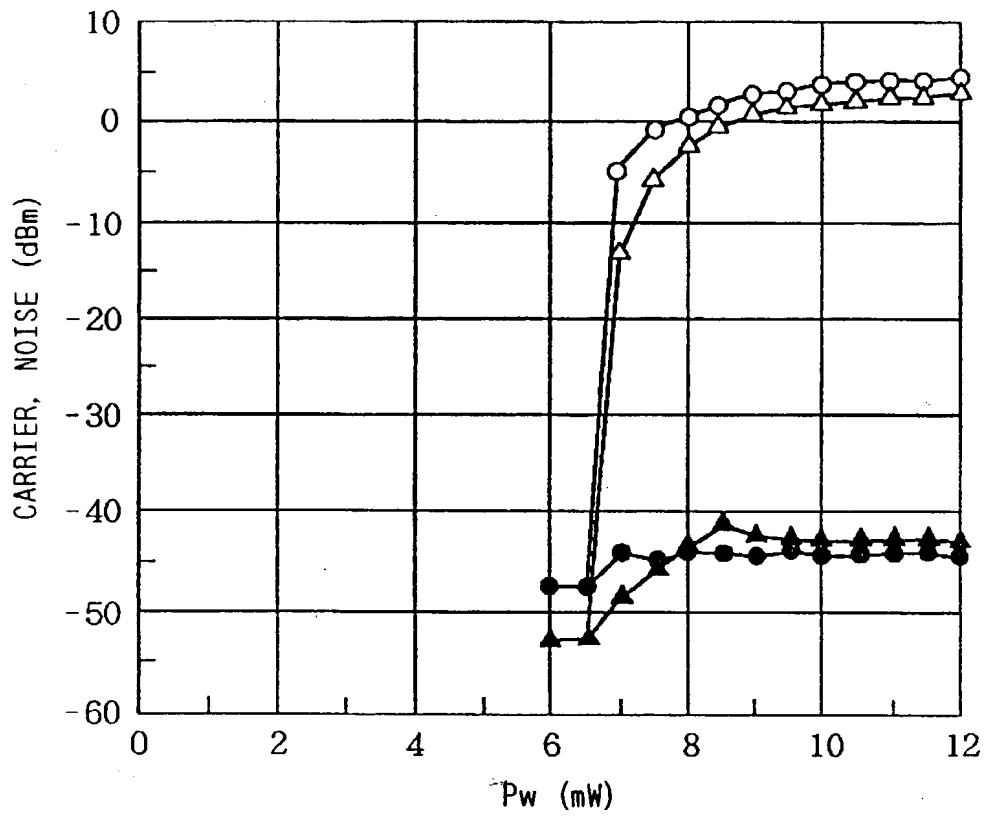


FIG. 41

MARK LENGTH (μm)

CARRIER

—○— 0.78


—△— 0.40

NOISE

—●— 0.78

—▲— 0.40

FIG. 43

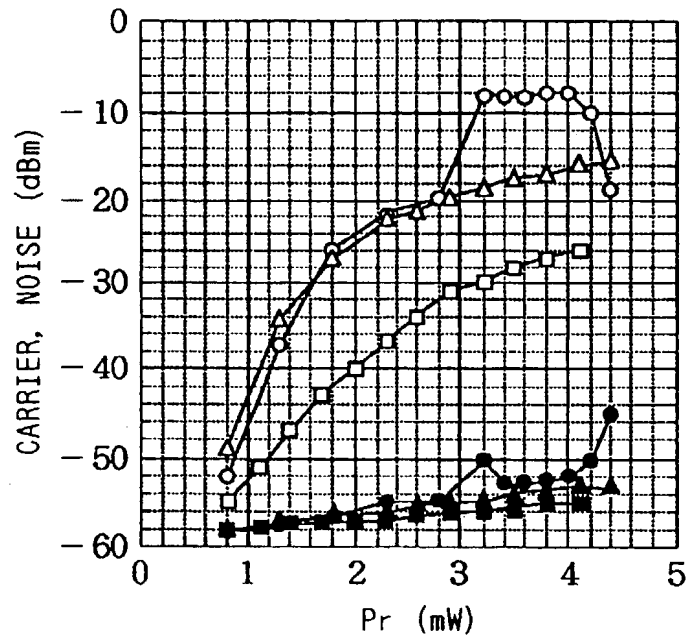


CARRIER

- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- △— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL DISC
OF SINGLE LAYER FILM

NOISE

- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- ▲— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL DISC
OF SINGLE LAYER FILM

FIG. 44

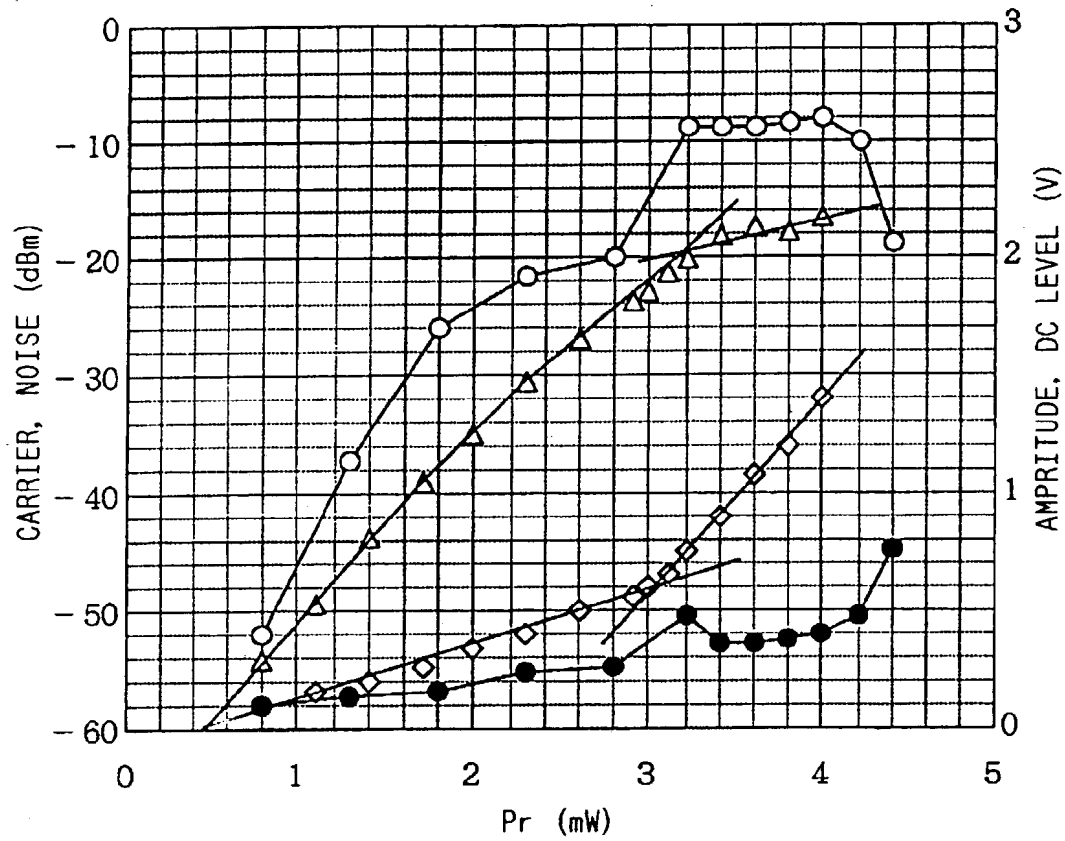

- CARRIER
- NOISE
- △ AMPRITUDE (V)
- ◇ DC LEVEL

FIG. 45


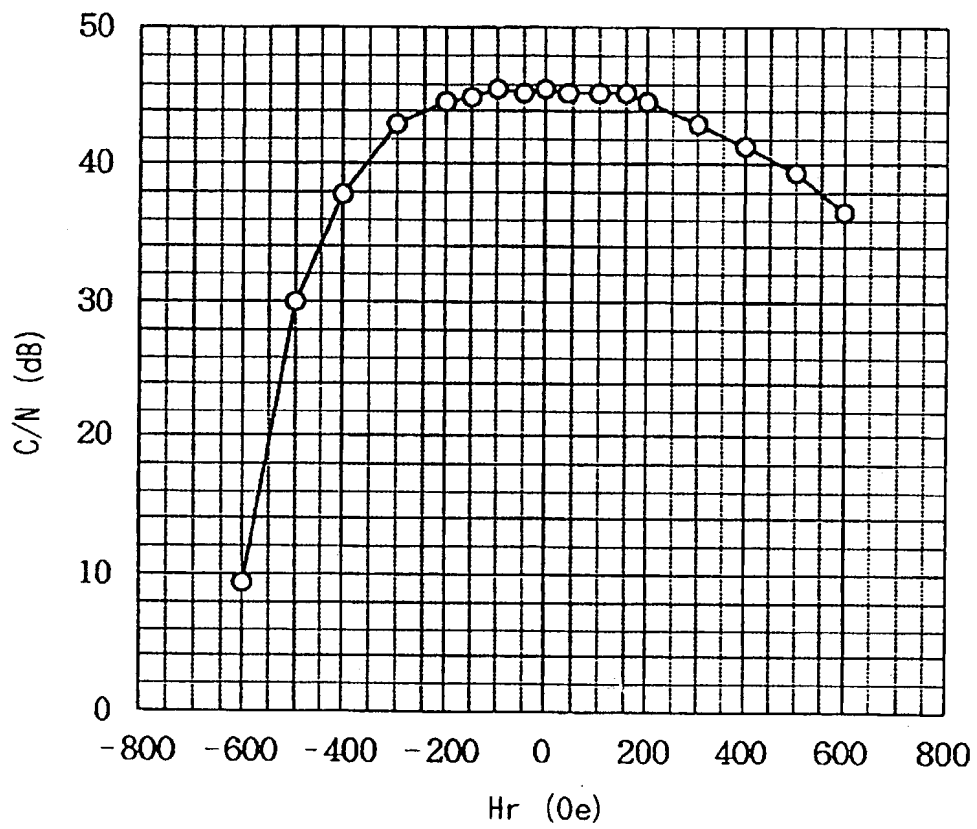


FIG. 46

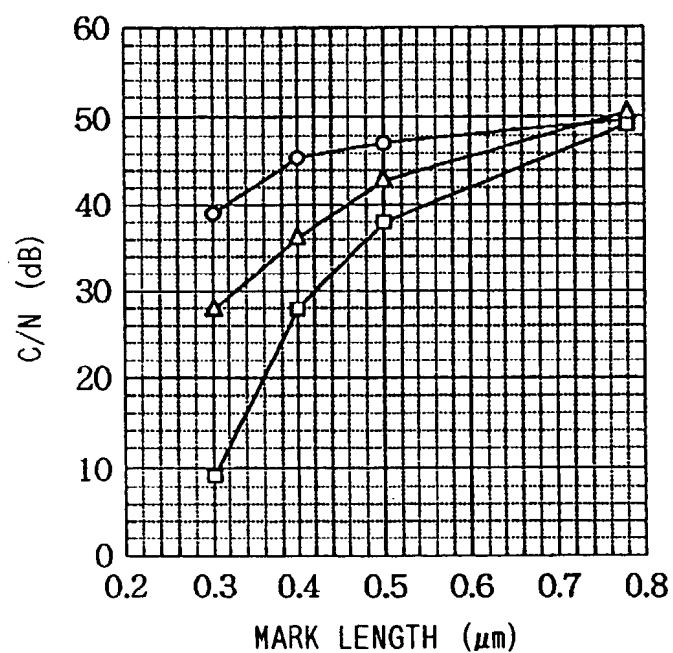


- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- △— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL DISC
OF SINGLE LAYER FILM

LINEAR VELOCITY = 9.05m/s


REPRODUCING POWER = 3.5mW

FIG. 47

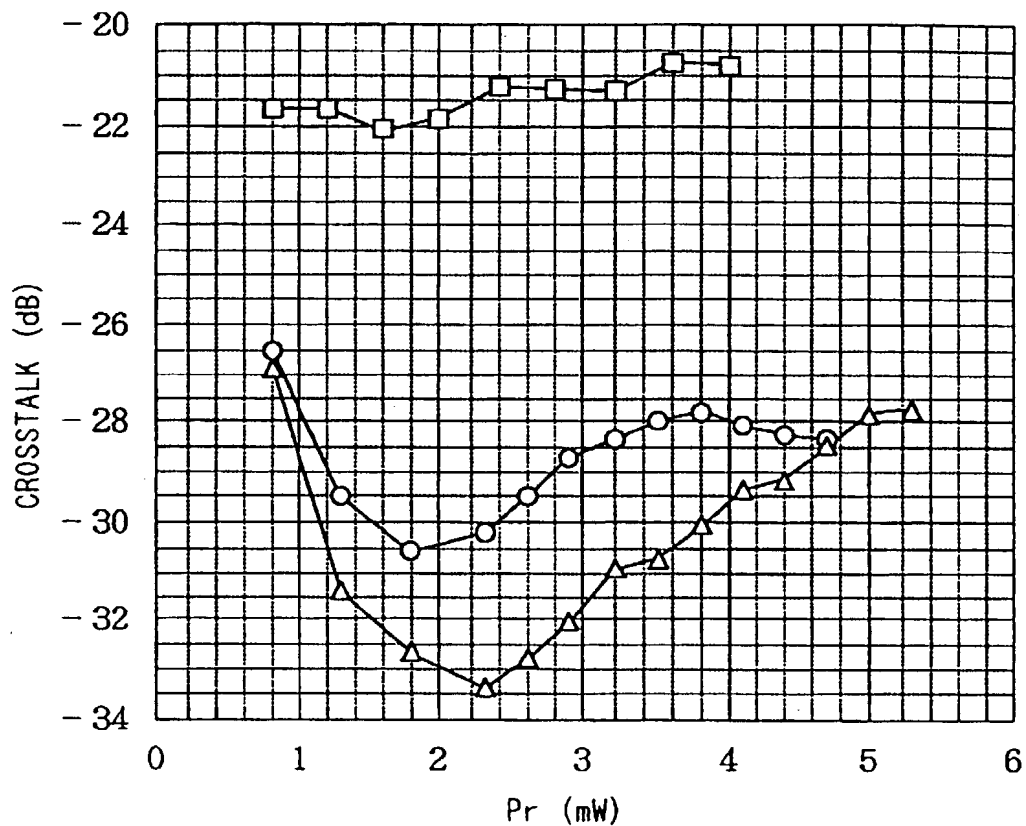

- SUPER RESOLUTION DISC
ACCORDING TO THE INVENTION
- △— CONVENTIONAL SUPER RESOLUTION
DISC OF TWO-LAYERED STRUCTURE
- CONVENTIONAL SINGLE LAYER DISC


FIG. 48

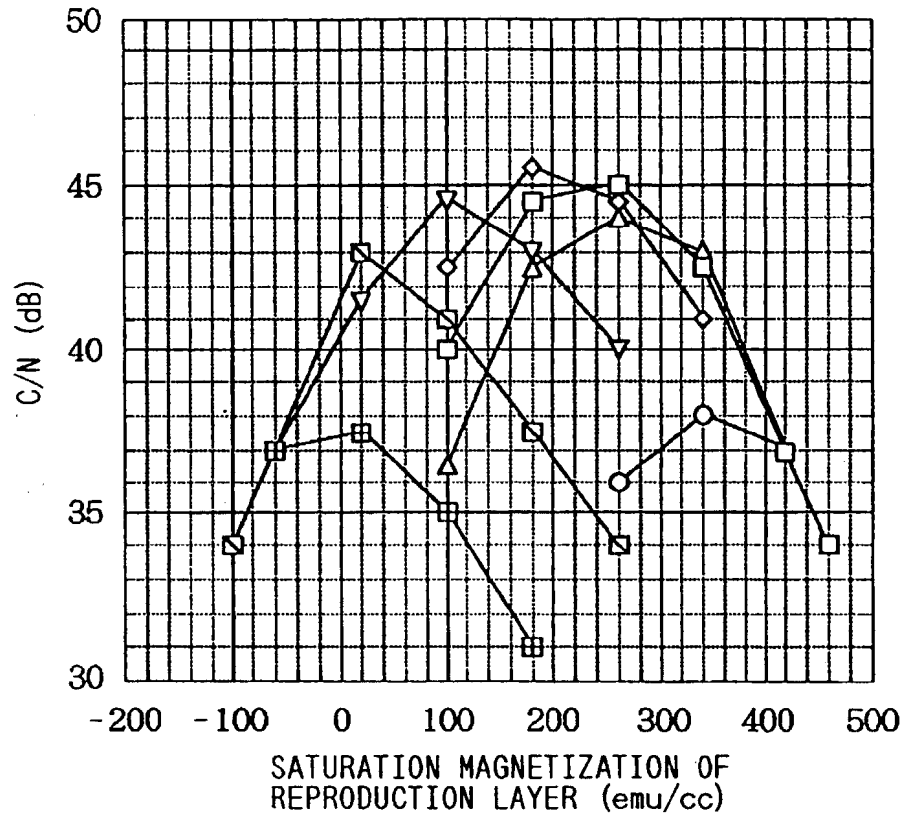

SATURATION MAGNETIZATION OF
INTERMEDIATE LAYER (emu/cc)

- -350
- △— -50
- 100
- ◇— 250
- ▽— 550
- 700
- 850


FIG. 49

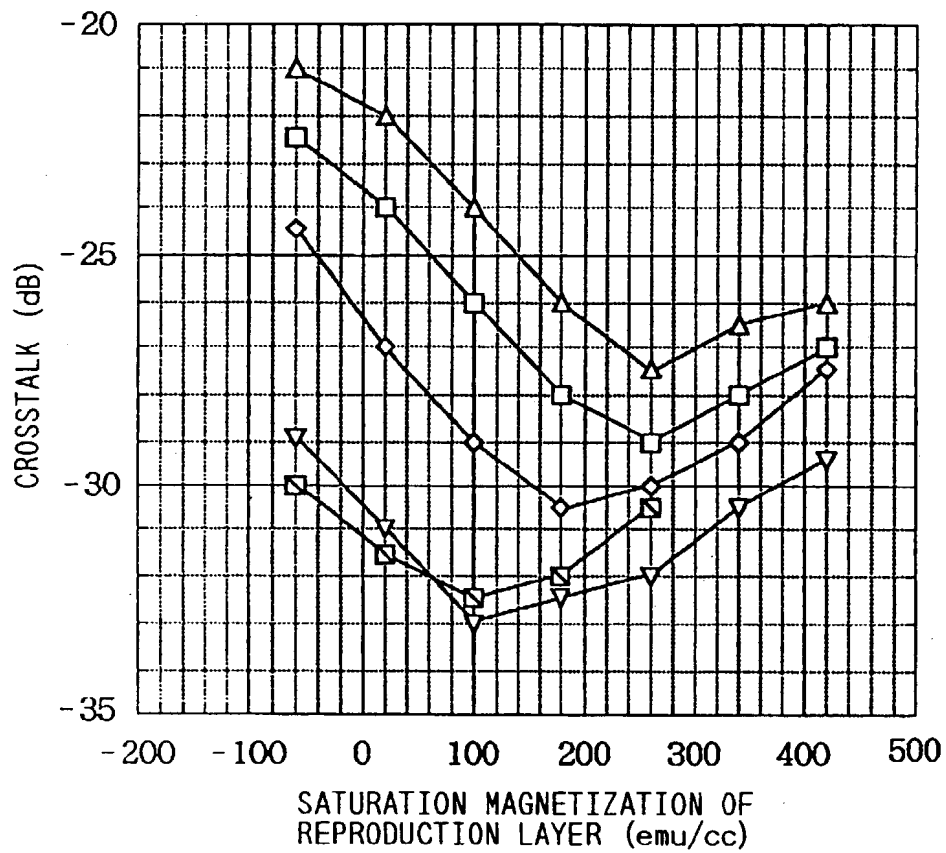

SATURATION MAGNETIZATION OF
INTERMEDIATE LAYER (emu/cc)

- △— -50
- 100
- ◇— 250
- ▽— 550
- ◻— 700


FIG. 50

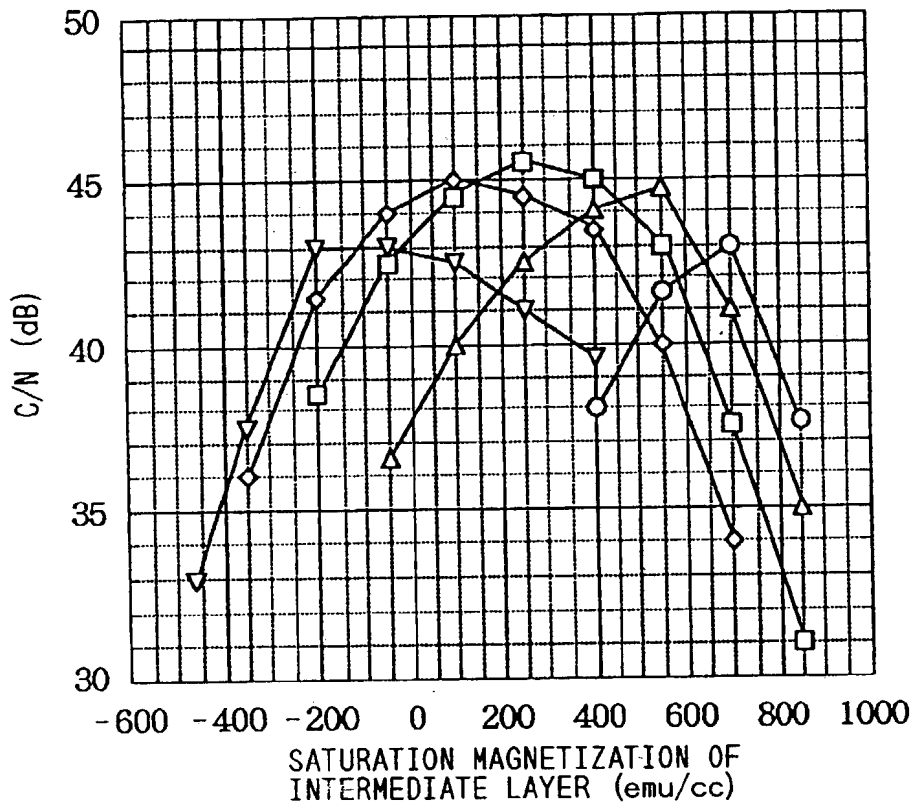

SATURATION MAGNETIZATION OF
REPRODUCTION LAYER (emu/cc)

- 20
- △— 100
- 180
- ◇— 260
- ▽— 340

FIG. 51

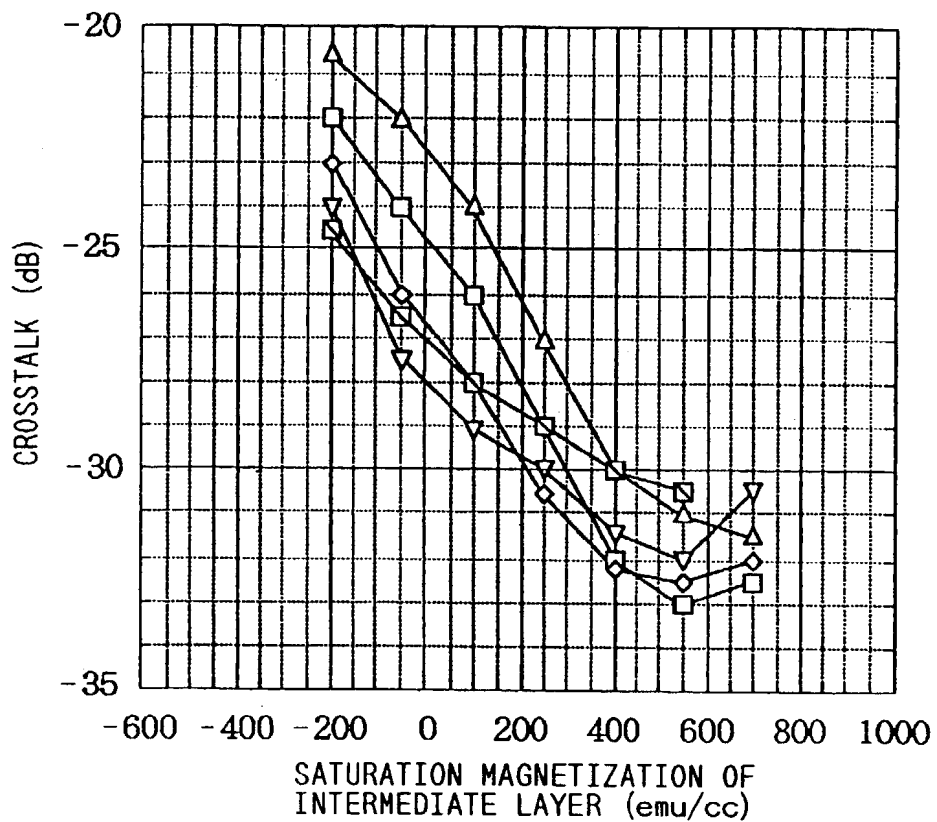

SATURATION MAGNETIZATION OF
REPRODUCTION LAYER (emu/cc)

- △— 20
- 100
- ◇— 180
- ▽— 260
- ⊠— 340

FIG. 52

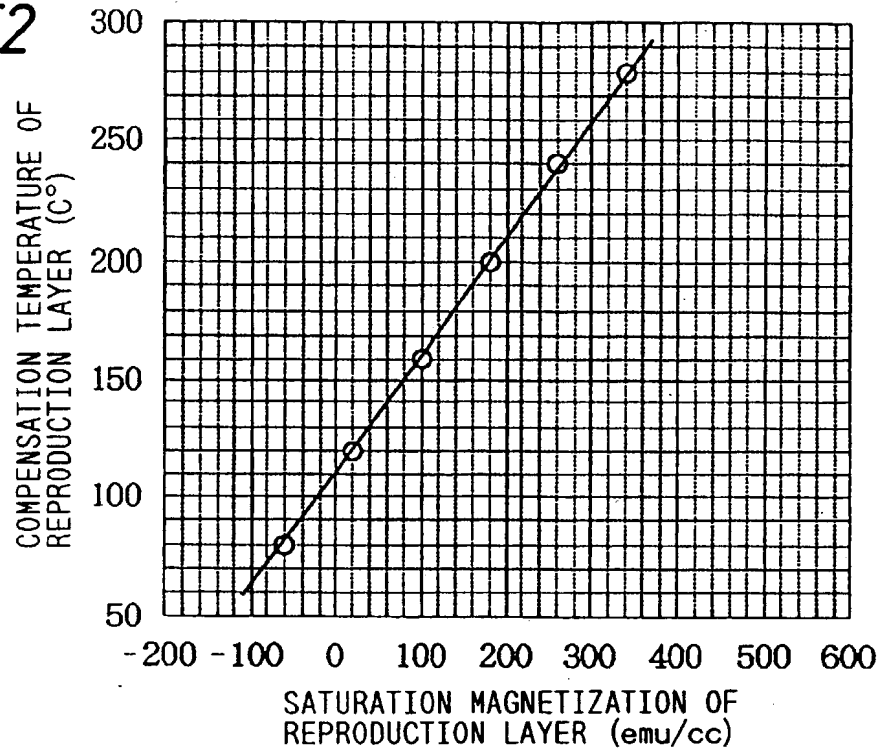


FIG. 53


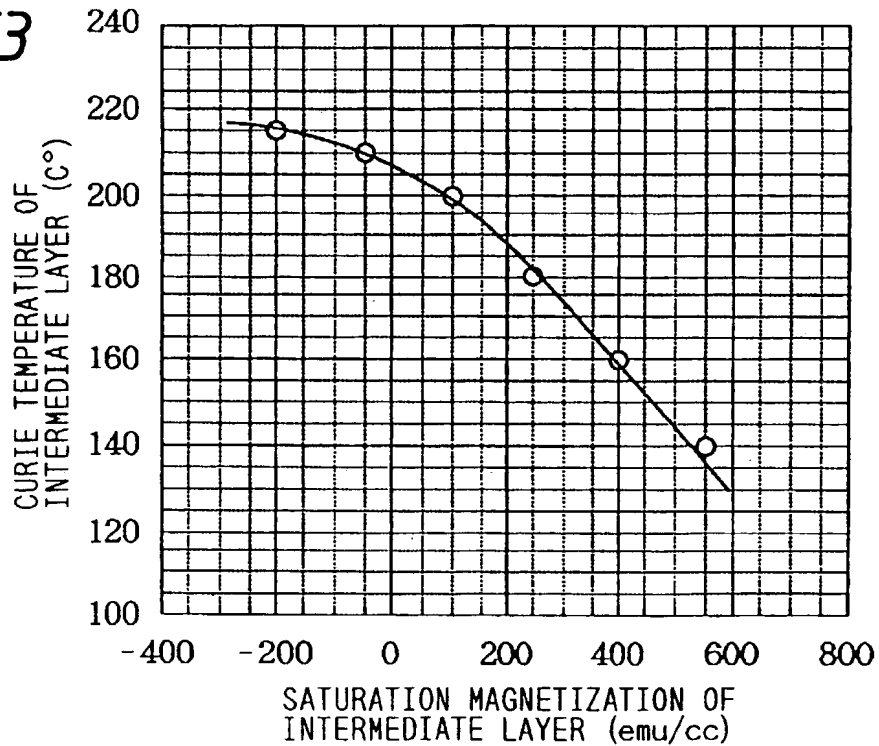


FIG. 54

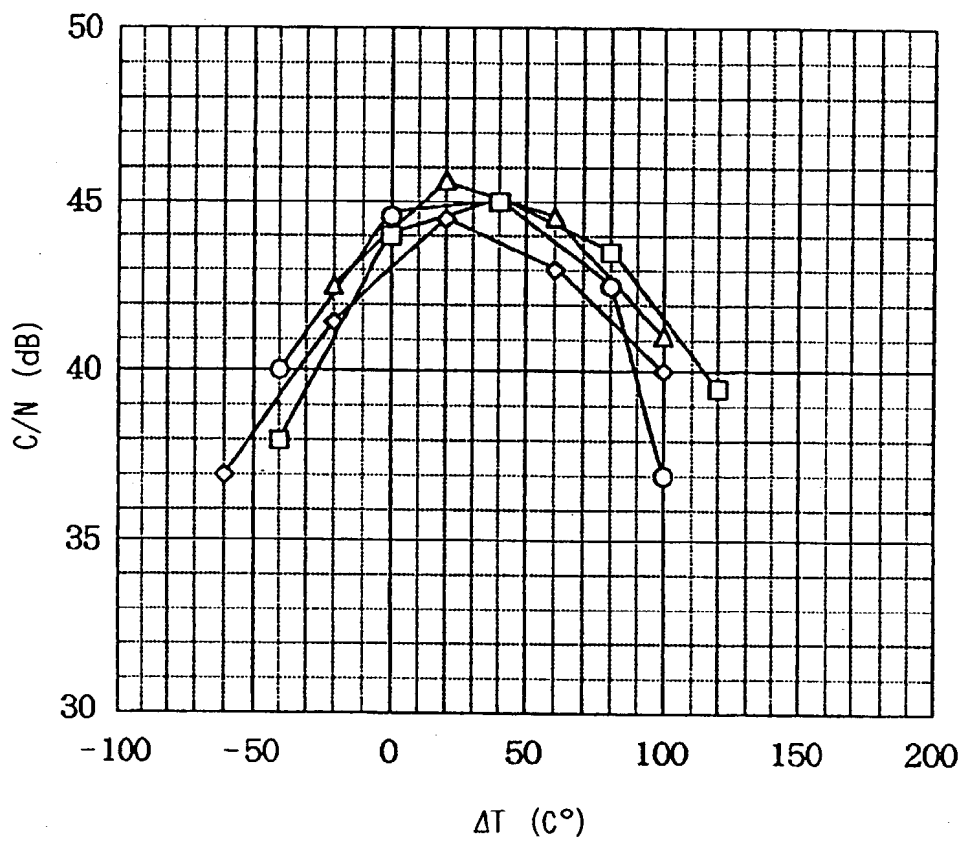

SATURATION MAGNETIZATION OF
INTERMEDIATE LAYER (emu/cc)

- 100
- △— 250
- 400
- ◇— 550

FIG. 55

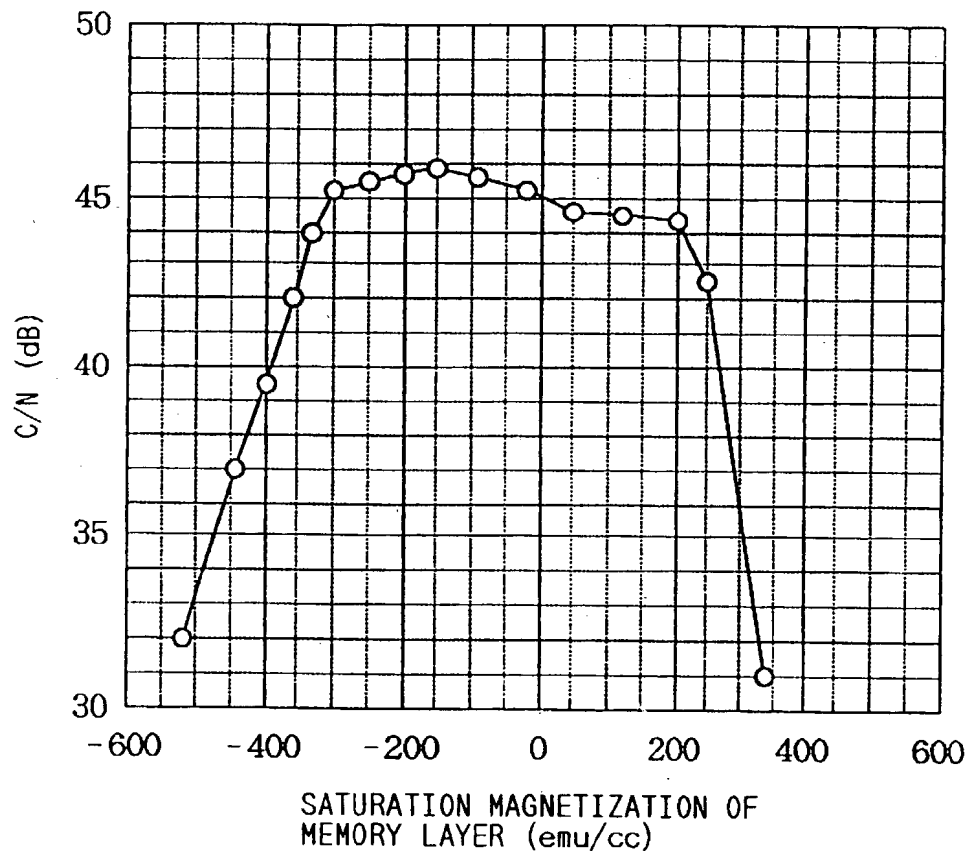


FIG. 56

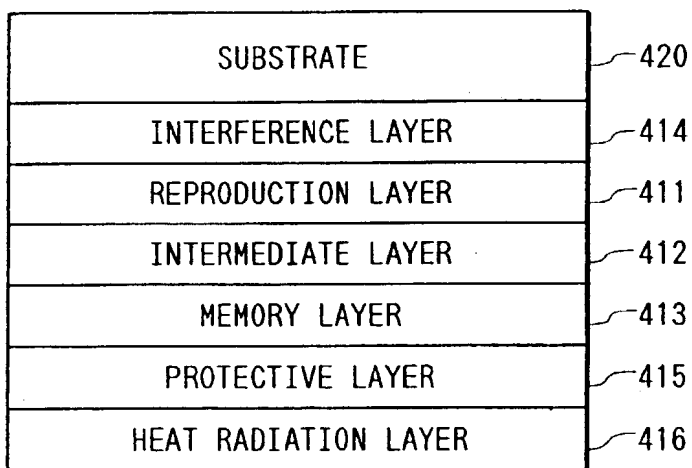


FIG. 58

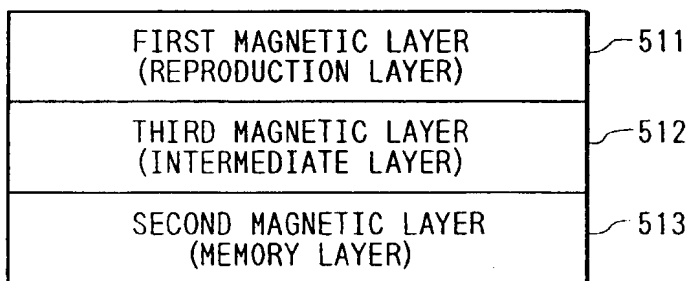
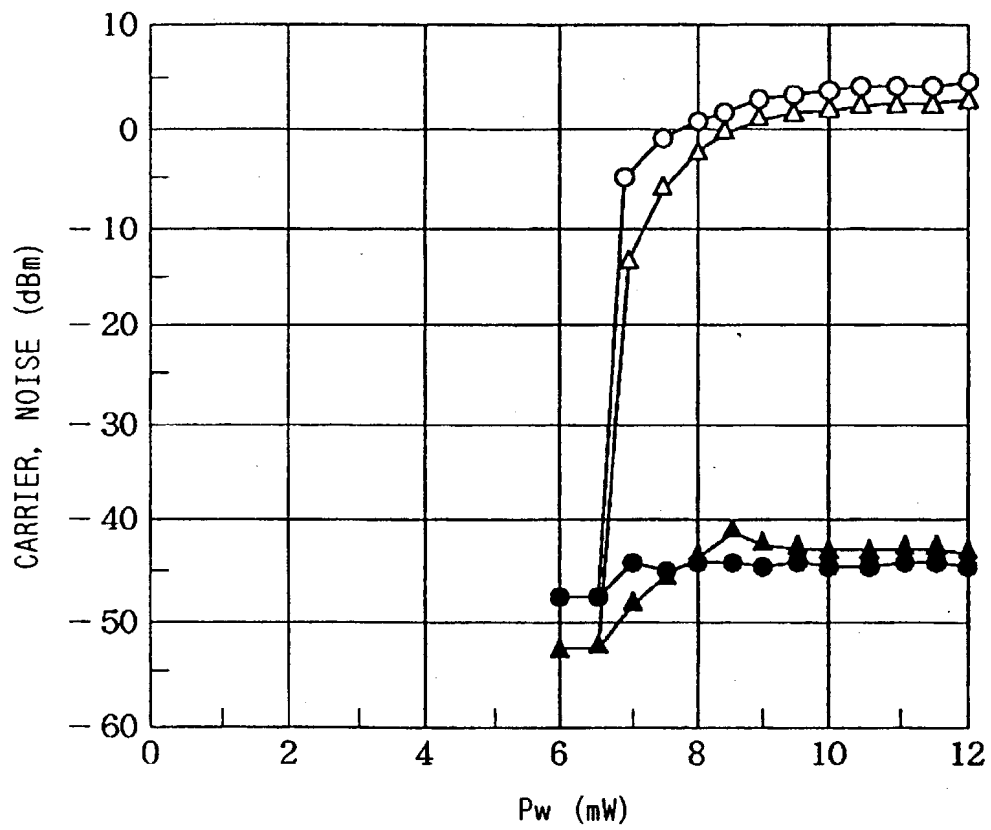


FIG. 57

MARK LENGTH (μm)

CARRIER

—○— 0.78

—△— 0.40

NOISE

—●— 0.78

—▲— 0.40

FIG. 59A

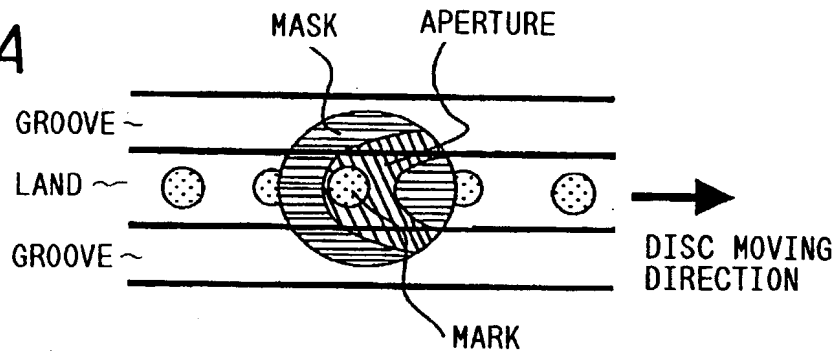


FIG. 59B

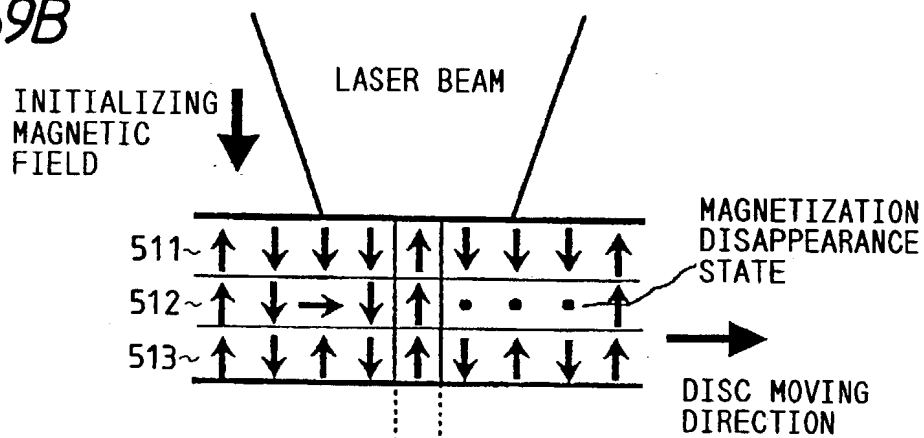


FIG. 59C

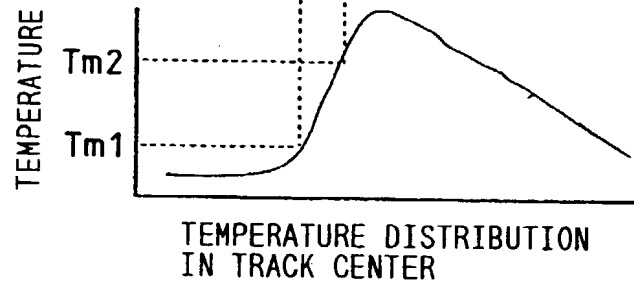


FIG. 60A

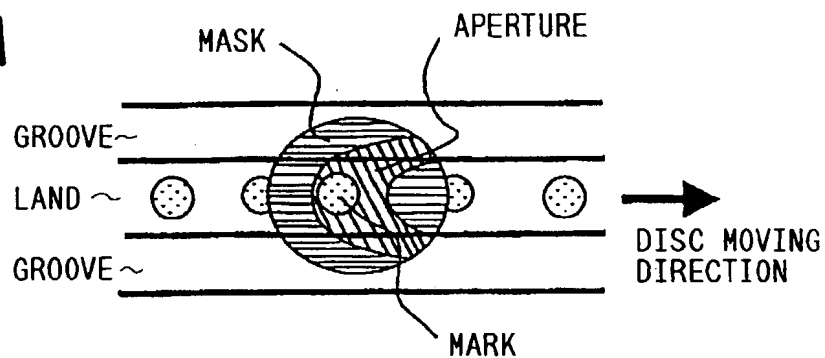


FIG. 60B

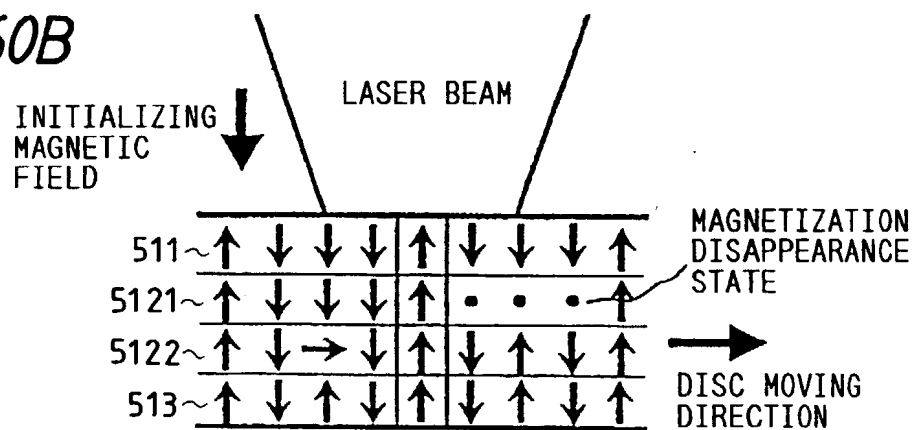


FIG. 60C

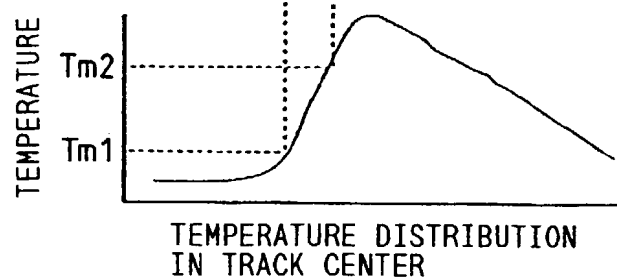


FIG. 61

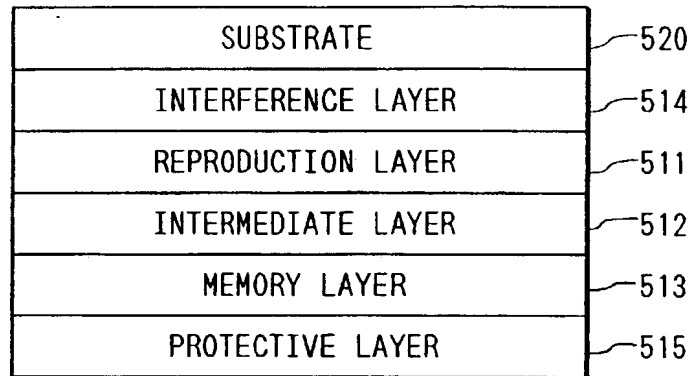


FIG. 62

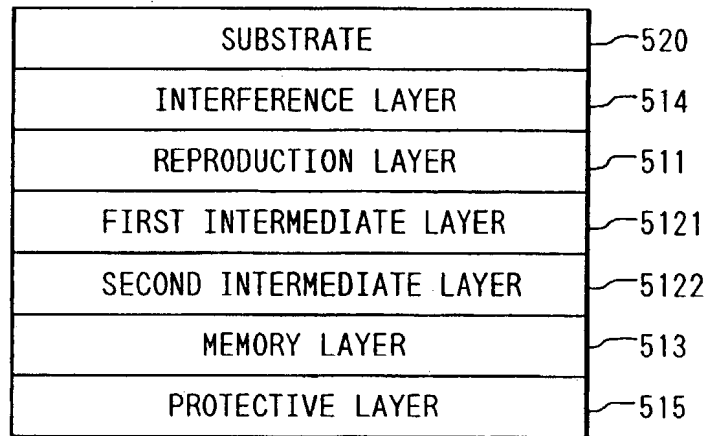


FIG. 63A

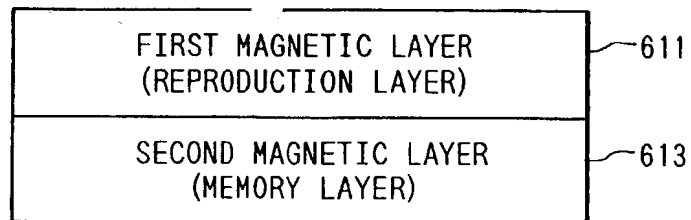
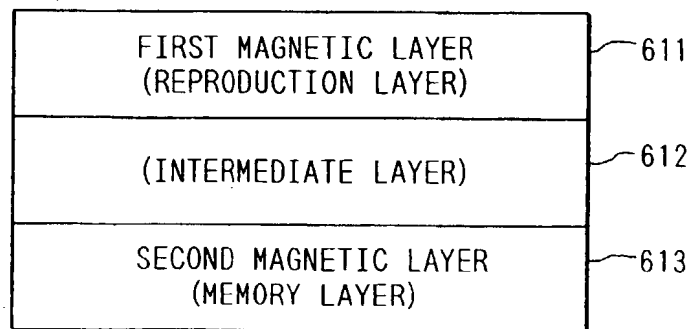


FIG. 63B



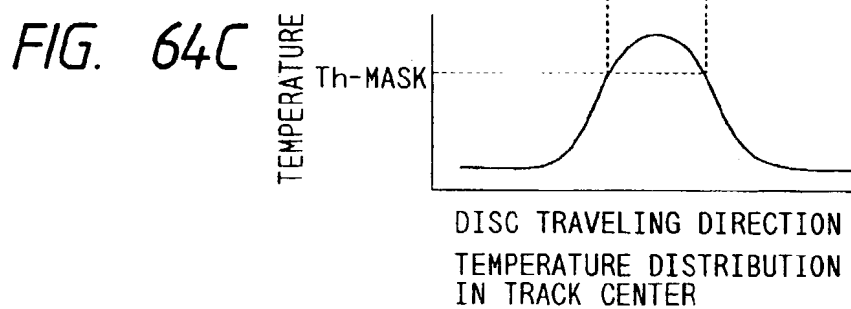
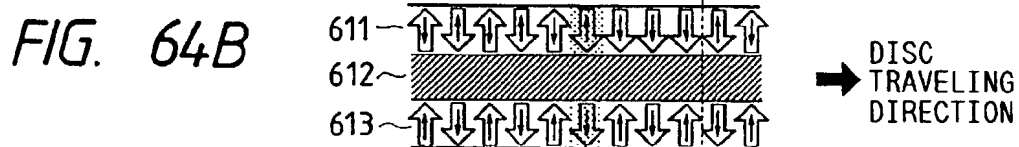
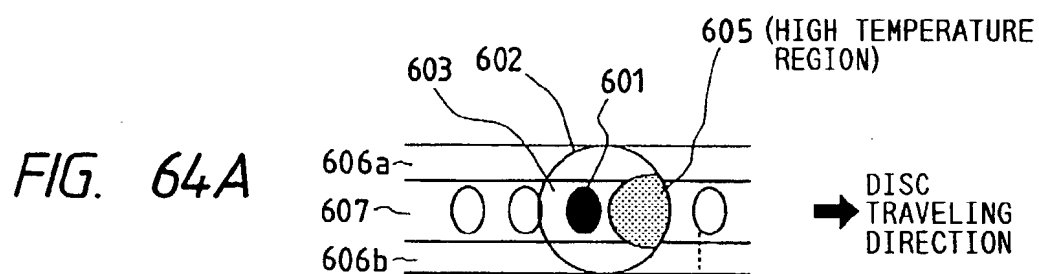


FIG. 65A

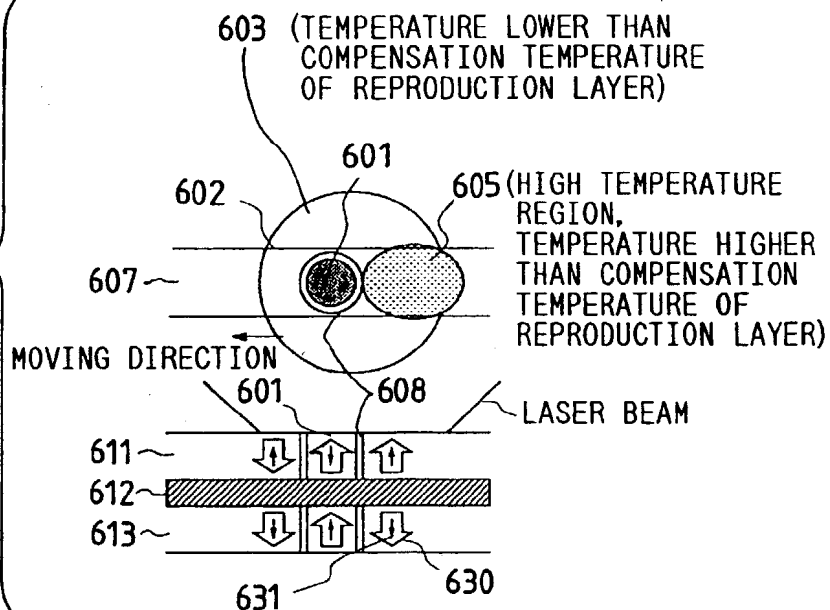


FIG. 65B

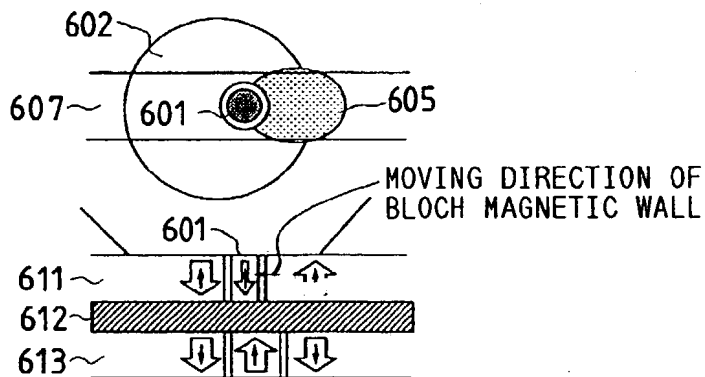


FIG. 65C

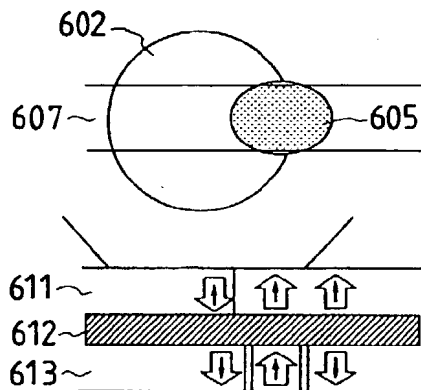


FIG. 66

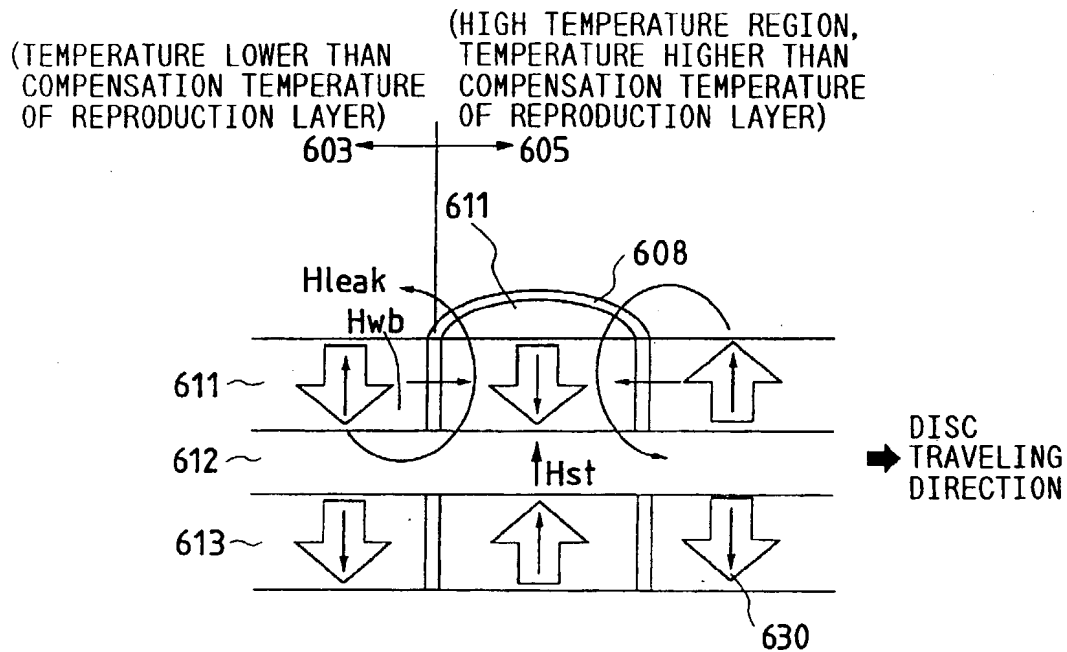


FIG. 67

